



## Overview of the DOE Fuel and Lubricant Technologies R&D

June 9, 2016

Kevin Stork (Presenter)  
Mike Weismiller



*Expanding the use of alternative fuels and fuel-controlled combustion*

# Fuel and Lubricant Technologies

## Goals

By 2020, demonstrate expanded operational range of advanced combustion regimes covering >95% of LD Federal Test Procedure

By 2020, demonstrate at least a 4% real-world fuel economy improvement with novel formulations for powertrain and driveline lubricants

- ☐ Compatible with new and legacy vehicles

Baseline: 2015 powertrain with regular E10 gasoline

## Accomplishments

Demonstrated with engine data that high RON biofuel plus high CR results in up to a 13% improvement in MPG


Demonstrated fuel effects can enable 36% BTE for RCCI at moderate load

FWG engine and WTW studies initiated


Showed 2.3% FE improvement with backward compatible advanced lubricant

### **New Technologies Developed**

- ☐ Friction modifiers for boundary lubrication
- ☐ Ionic Liquids synergy with ZDDP – anti-wear

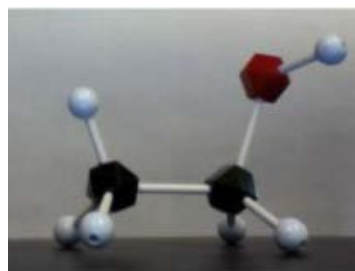


Ethanol Puppy:  
Ball-and-Stick Model






# Fuel and Lubricant Technologies

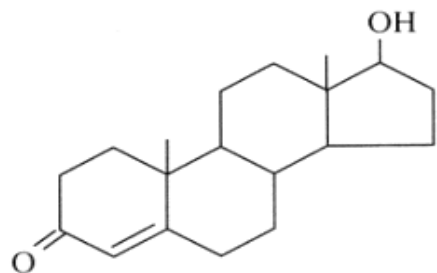


<i>Funding in millions</i>	<b>FY 2015 Enacted</b>	<b>FY 2016 Enacted</b>	<b>FY 2017 Request</b>
Fuel and Lubricant Technologies	\$20.0	\$22.5	\$20.5



# Convergence of Three Automotive Challenges Underlines the Importance of Advanced Research

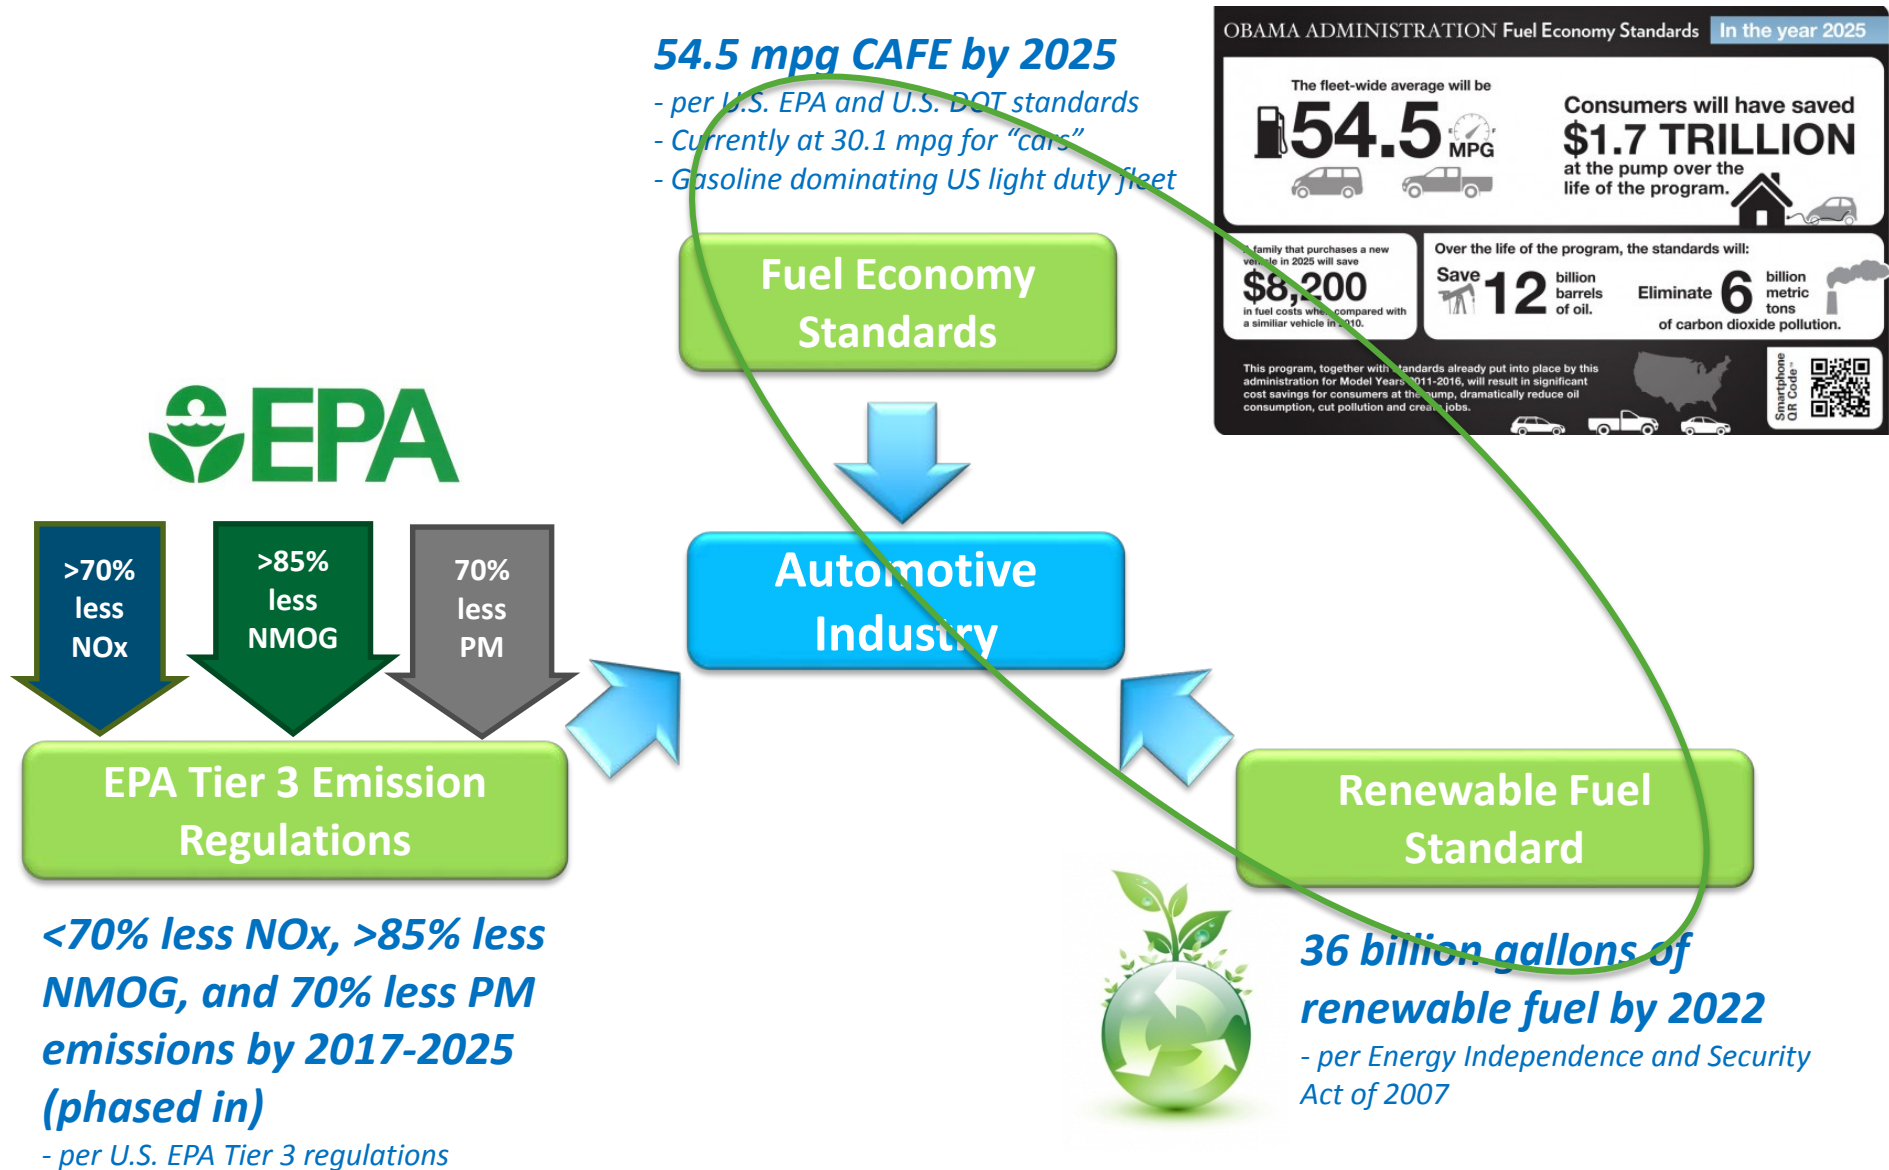

# Historically There has Been a Very Tight Coupling between Engines and Fuels, in 1980 This Began to Diverge and Hasn't Recovered

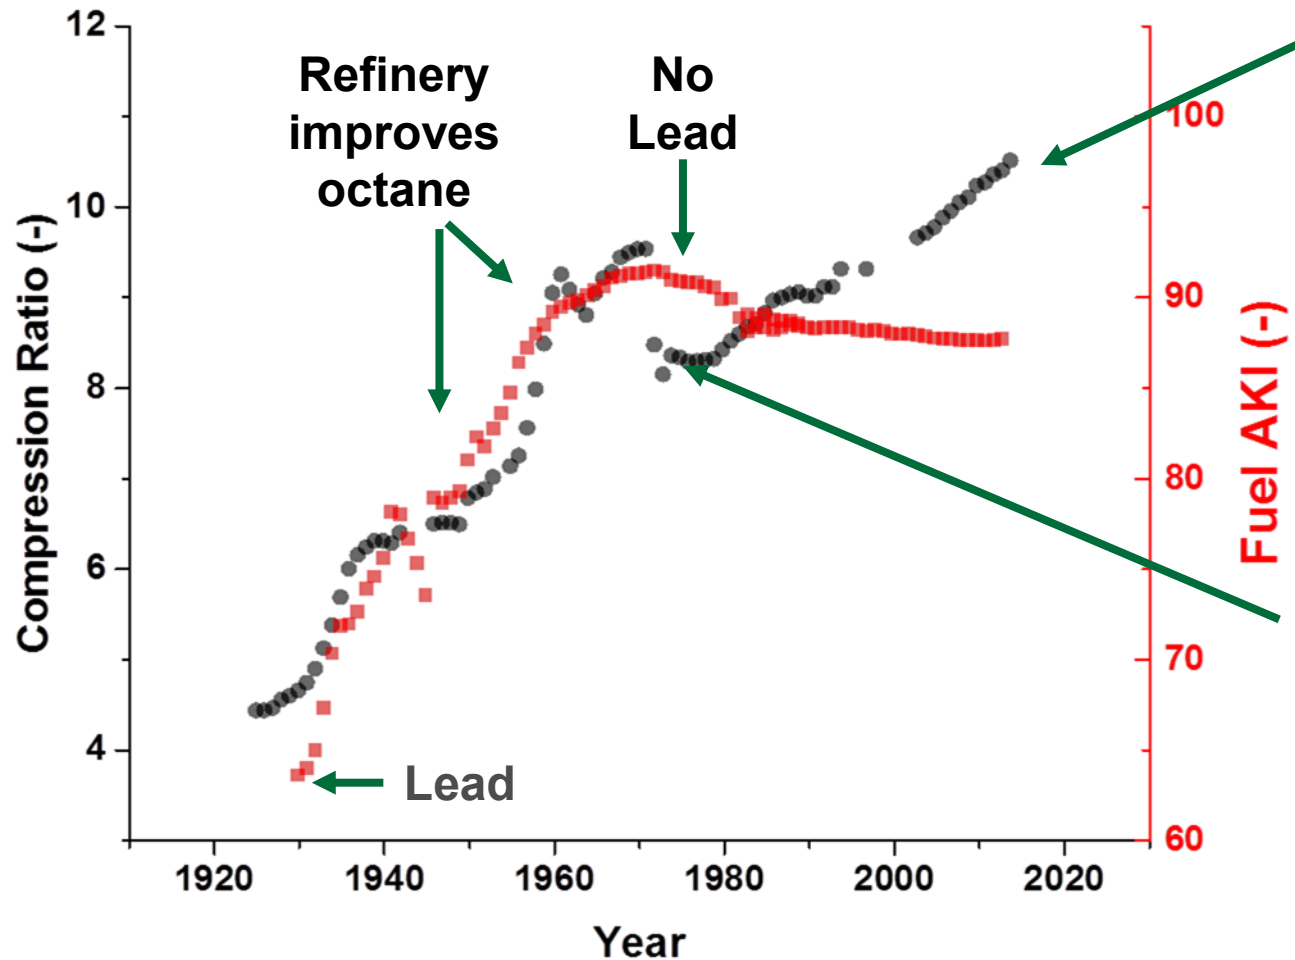


174 hp, 1.5 L disp  
0-60 in 6.6 s  
31/41 MPG



90 hp, 3.6 L disp  
0-60 in 15.5 s  
15/21 MPG


# Engine Data + Vehicle Modeling can Estimate the Benefits Enabled by High Octane

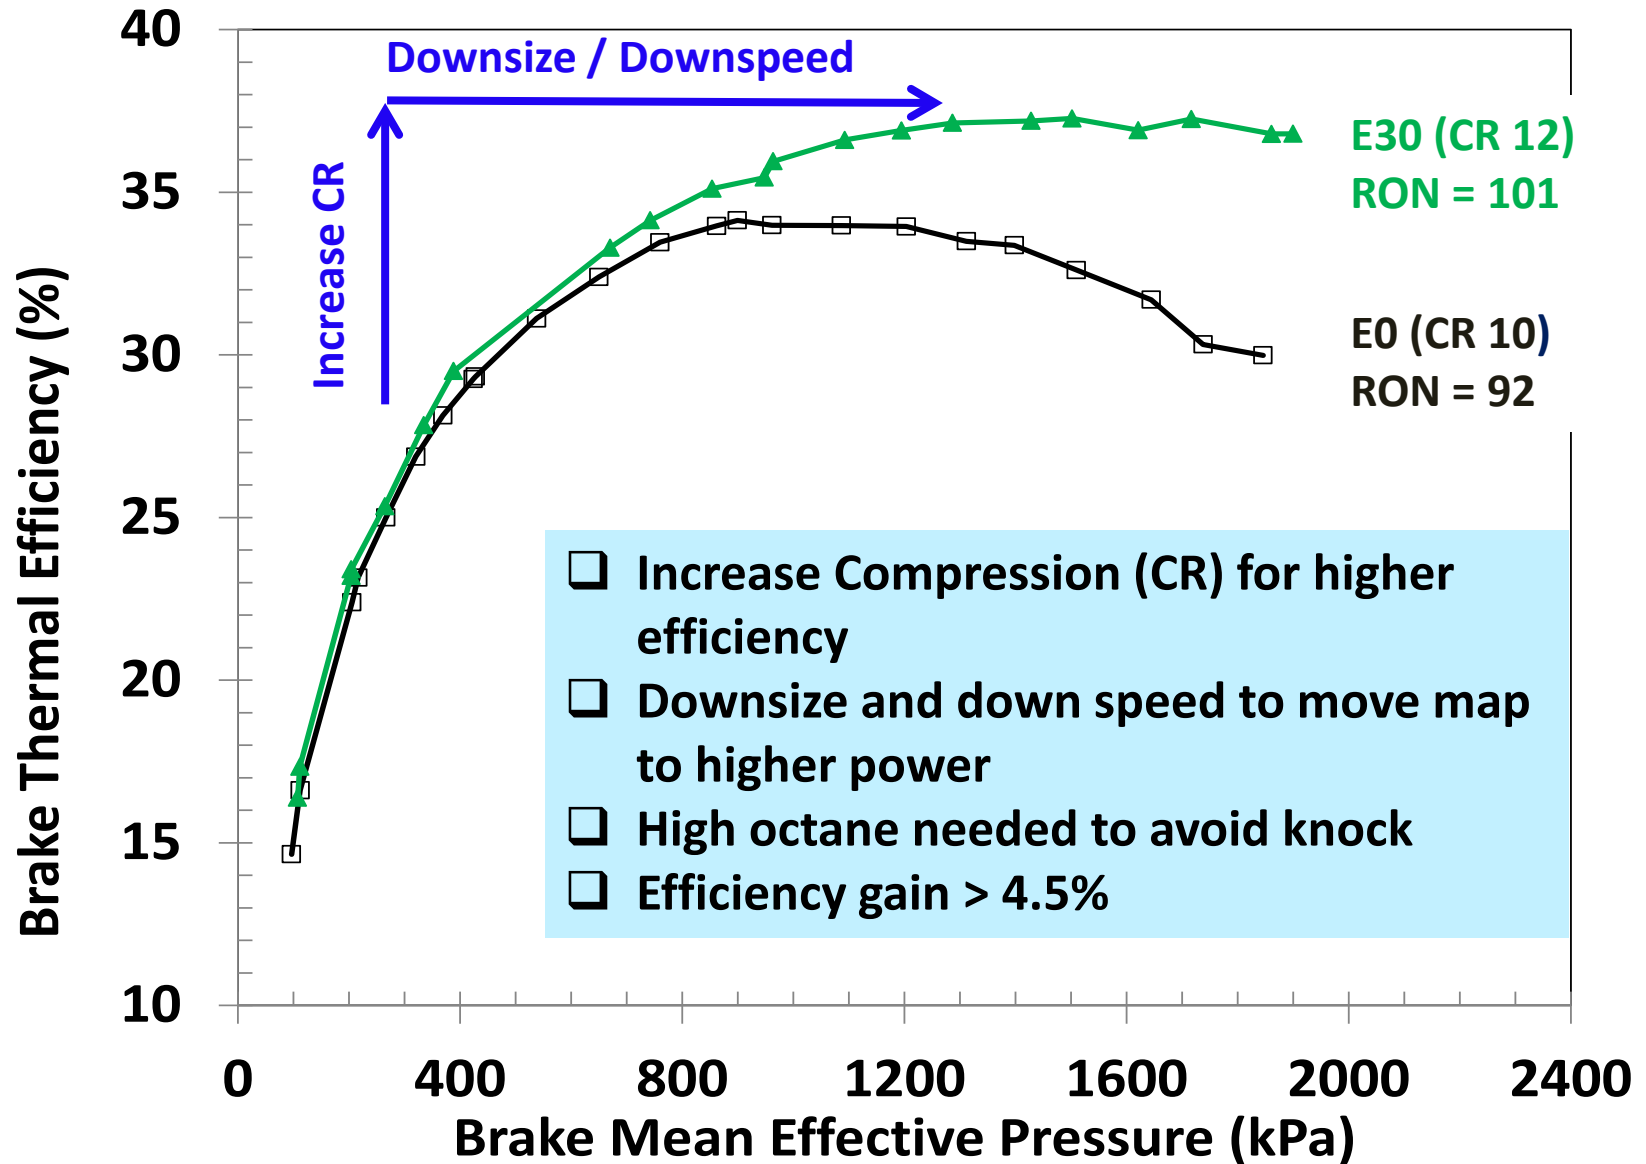



- ❑ Need better fuels and engines to meet goals.
- ❑ Current fuels constrain engine design.
- ❑ Co-optimization for near and long-term fuel economy gains.

**Presents an opportunity for low-carbon fuels!**

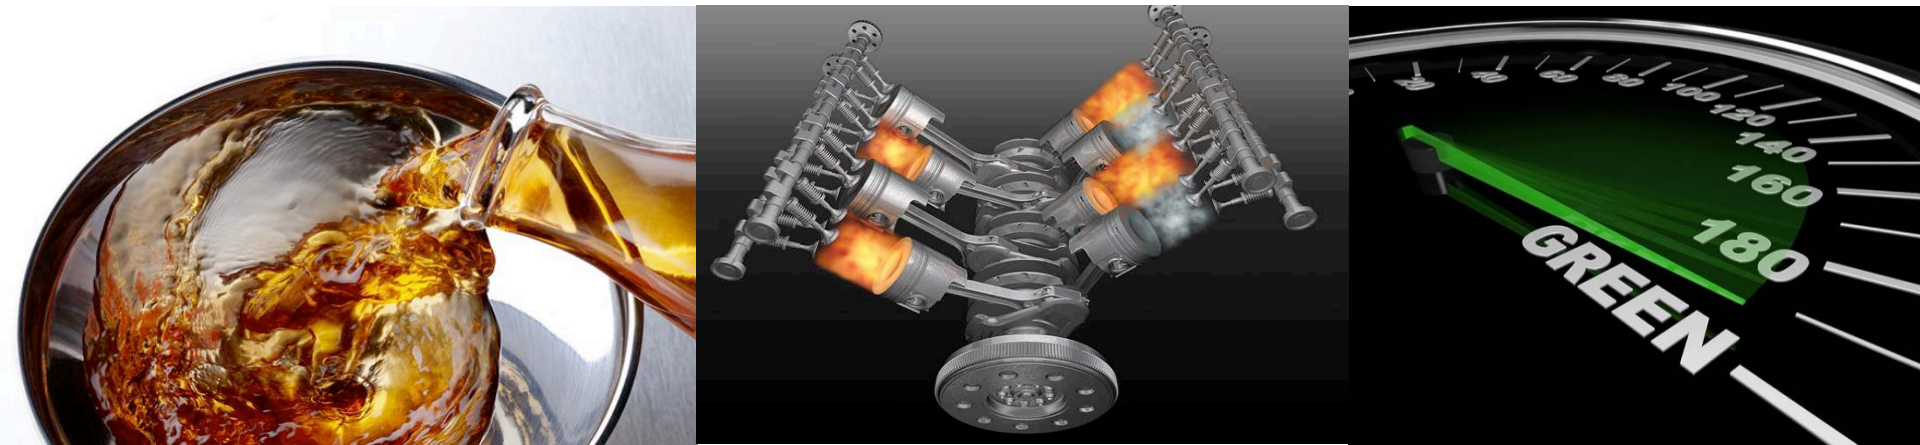

*Convergence of alternative fuels and powertrain development*






## Goals

- ☐ Reduce per-vehicle petroleum consumption 30% vs. 2030 base case
  - Additional 7-15% reduction in engine fuel consumption.
  - 20% reduction in fuel WTT emissions.
  - GHG emissions reduction of the light-duty vehicle fleet by 9-14% relative to BAU within 10 years of market introduction.
- ☐ Develop new fuels and engines that:
  - Have better performance.
  - Can be produced affordably, sustainably, and at scale.
  - Reduce GHG emissions.

## Fuel Candidate Screening

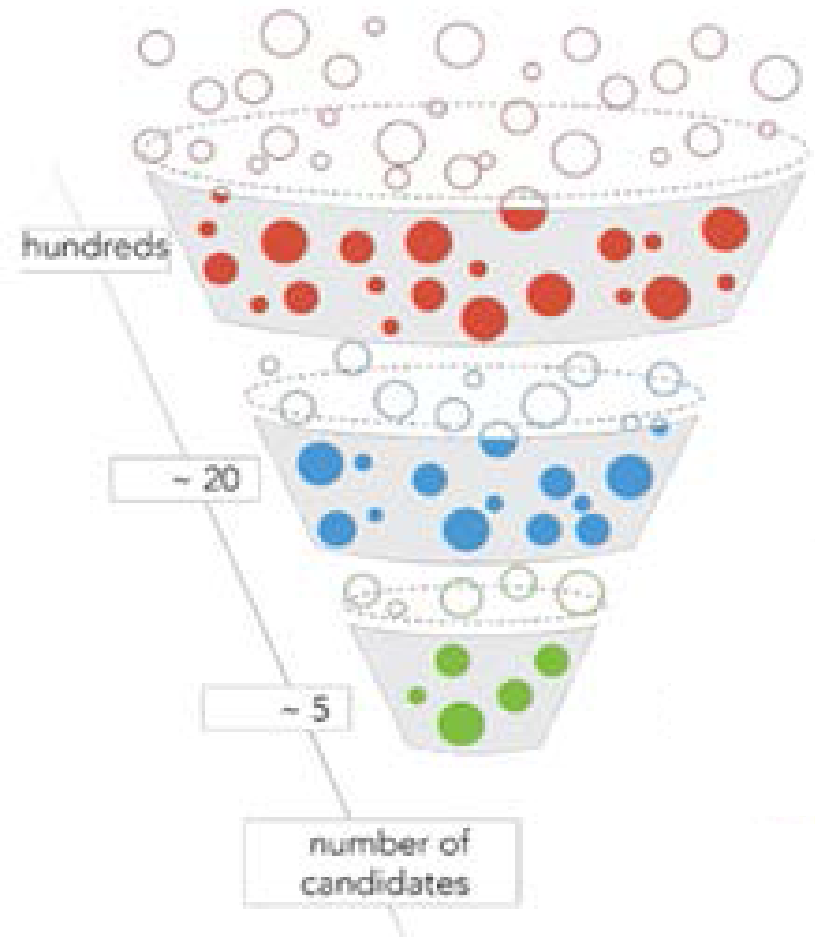

# U.S. DRIVE FWG Primary Objective


- ❑ Evaluate potential properties of lower carbon fuels\* for future, high efficiency engines and combustion regimes meeting U.S. DRIVE ACEC targets.

## Focus Areas (Fuel Effects Studies Aligned with ACEC)

1. Premixed, Flame Propagation, Spark Ignition Combustion Mode (SI)
2. Mixing/Diffusion Compression Ignition Combustion Mode (CI)
3. Chemical Kinetics Dominated Low Temperature Combustion Modes (LTC)
4. New Combustion Quality Metrics
  - a. Anti Knock for SI
  - b. Ignition Delay for LTC

*\* Lower carbon as measured by well-to-wheels greenhouse gas emissions measured in g/mi, compared to a baseline case (reference fuel and vehicle)*

# FWG Fuel Set Compares Octane Effects for Bio-Gasolines

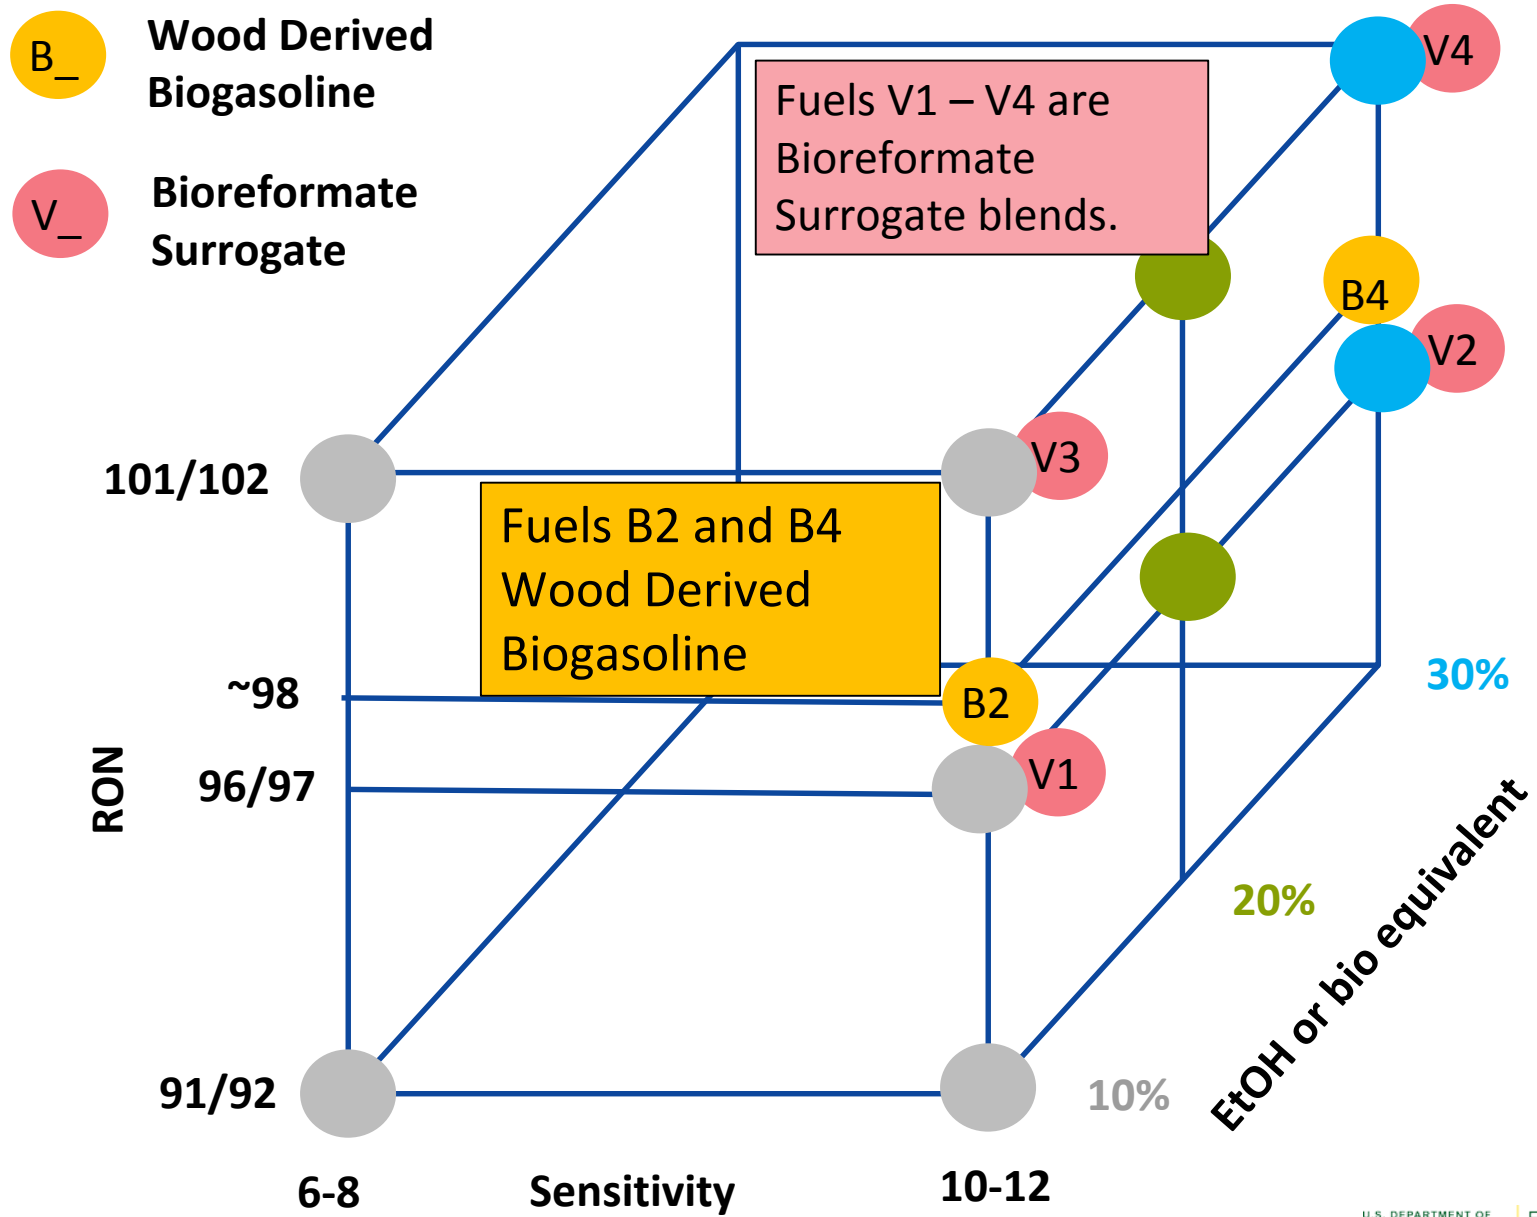

# Well-to-Wheels (WTW) Activities




Do tailpipe GHG reductions from increased octane outweigh refinery GHG increases?

- ☐ Quantify net GHG impacts of increased engine efficiency enabled by higher octane ratings, refinery actions, and/or biofuel content
- ☐ Refinery Linear Program Modeling – Analyzes GHG for the blendstock
  - Basis: EIA 2014 data for regions and refineries across the US
- ☐ Compare multiple potential fuel/engine combinations, with and without renewables
  - Basis: GREET Model (augmented by additional analyses)
- ☐ Supported through Argonne National Laboratory and Jacobs Engineering



# Lubrication Research Motivation and Strategy

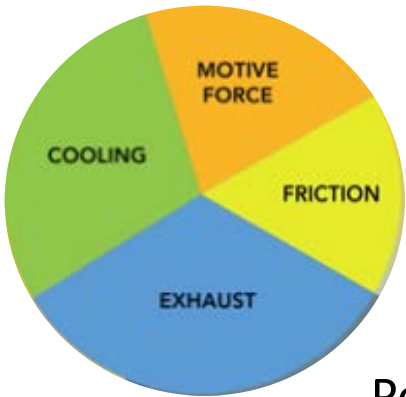

16.5% of fuel energy is lost to friction


- 11.5% Engine
- 5% Powertrain



**Reducing Friction** has a direct effect on

- Petroleum consumption
- GHG emissions

Potential to have ‘drop-in’ replacement for legacy vehicles  
Many Vehicles x Small per Vehicle Savings = Large Benefit

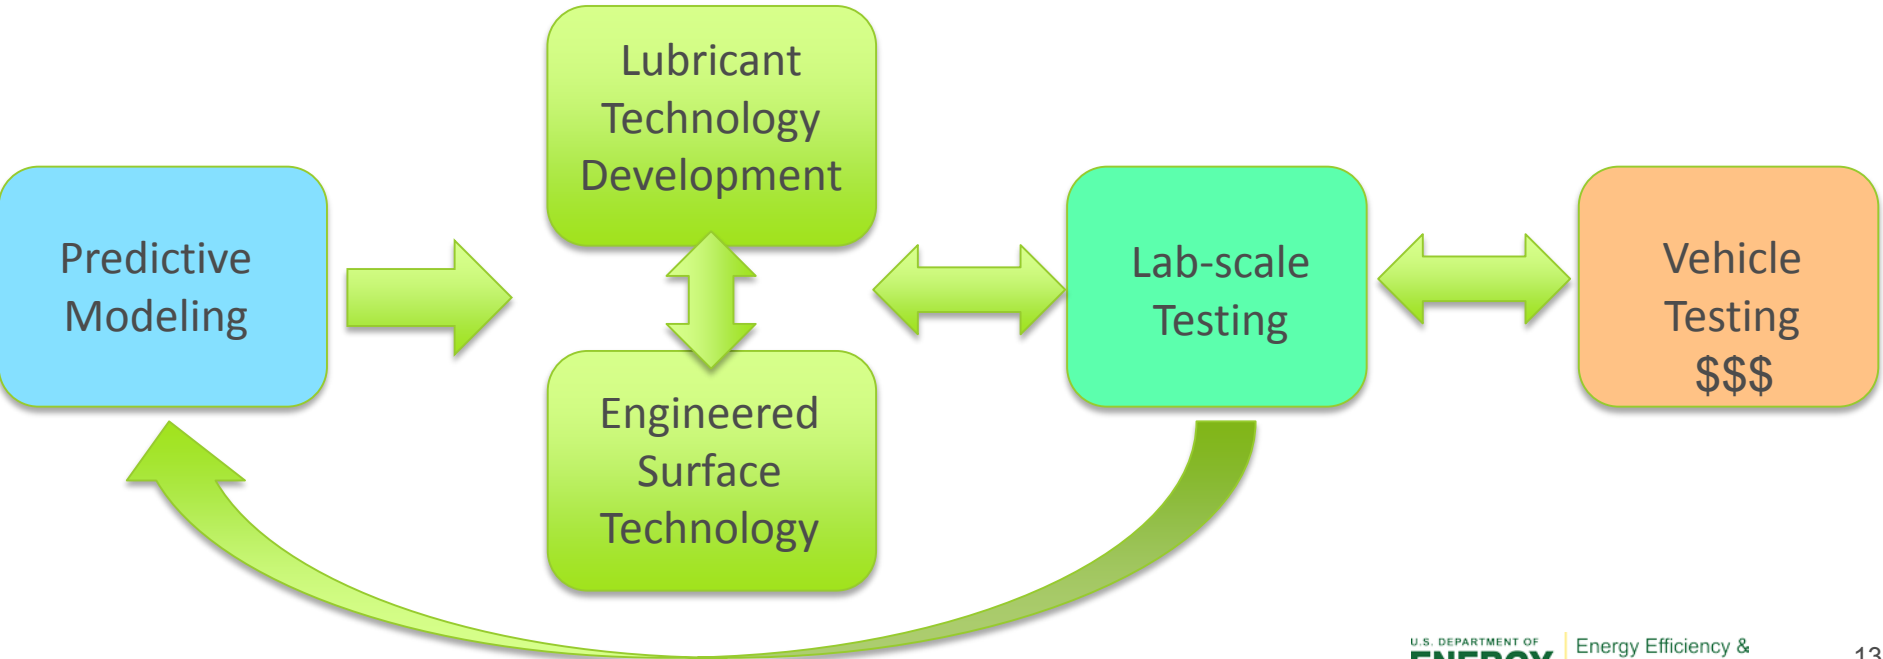


# A Novel Lubricant Formulation Scheme for 2% Fuel Efficiency Improvement


**Northwestern Univ. – Q. Jane Wang**

**Achieve improvements by:**

- ☐ Reducing boundary friction at start-up and low speed
- ☐ Reducing lube viscosity at medium- and high-speed
- ☐ Plot shows additive maintains film thickness at low and medium speed
- ☐ Anti-wear additives successfully tested
  - Photo shows lower wear with additive than without
  - Can enable lower viscosity lubes

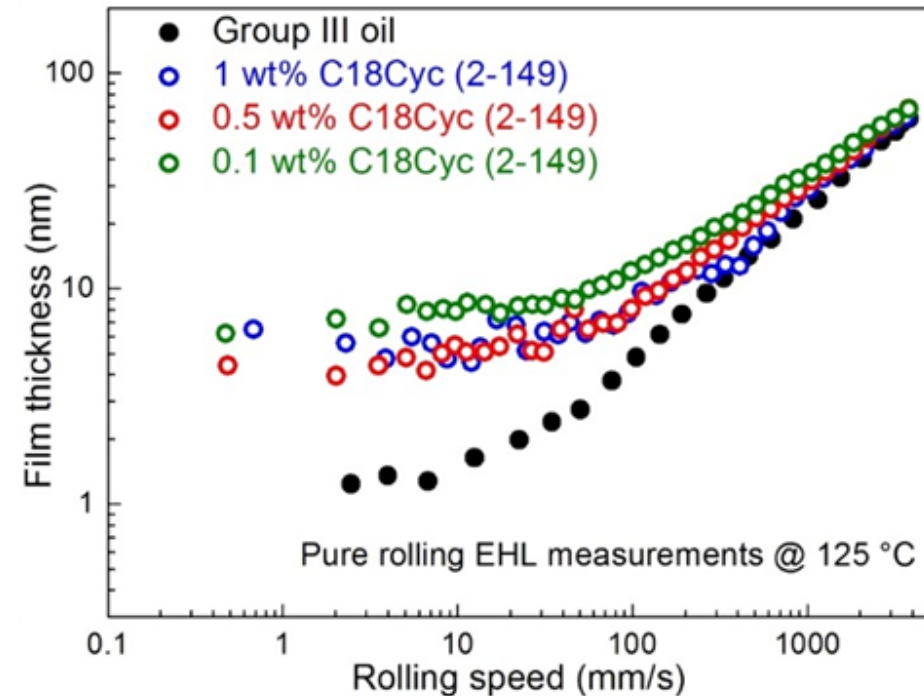


b) 5W30 formulated oil

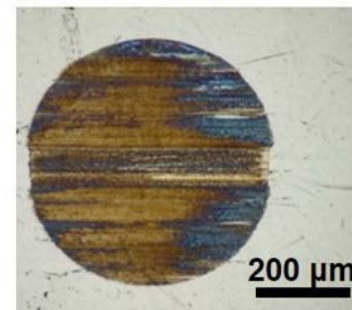

Wear: 490E3 μm<sup>3</sup>

PAO + 0.5 % capped B<sub>2</sub>O<sub>3</sub>

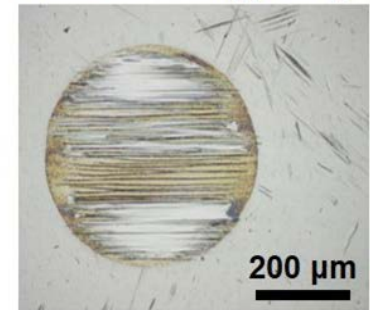

Wear: 340E3 μm<sup>3</sup>

# Power Cylinder Friction Reduction through Coatings, Surface Finish

## Ford – Arup Gangopadhyay

- ❑ High porosity cylinder bore coatings using Plasma Transfer Wire Arc (PTWA)
  - Allows oil retention → reduced friction
- ❑ Optimized PTWA process to control porosity level (2-8%) and developed procedure for characterizing porosity on the micro-scale.


## ANL – Ali Erdemir

- ❑ Coated liners will be paired with ANL's low-friction/low-wear nanocomposite coated piston-rings
  - Despite harsh testing conditions, low wear was observed and friction was reduced by 10-15%.

PTWA Coating with 6-8% Porosity



red = pores

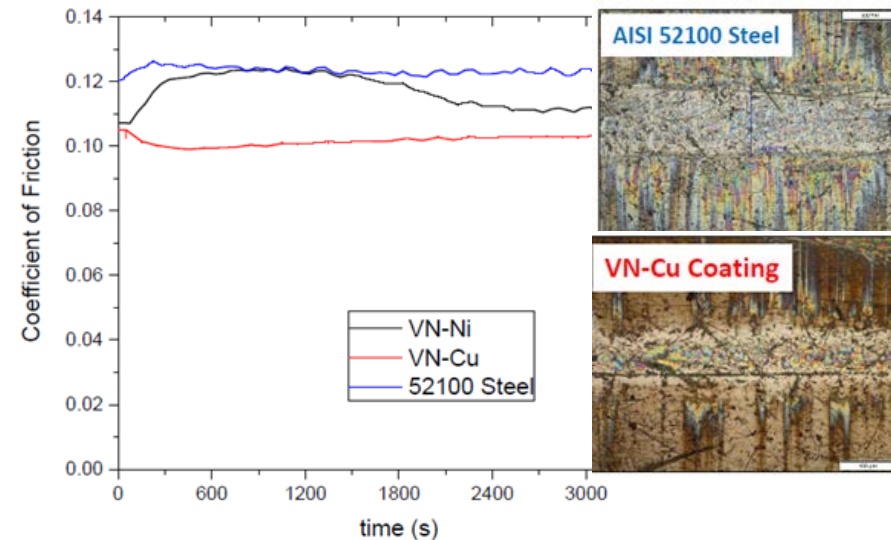

# Directions for FY 17

## ❑ Co-Optima Project

- Decision Point for SI fuel (Spring 2017)
- Continued examination of fuel properties (RON, HoV, etc.) to enable high efficiency SI engines
- Thrust 2 (Advanced CI, Low-Temp. Combustion) emphasis increases

## ❑ Continued Lubricants R&D Activity

- Coordination of multiple capabilities (surface analysis, emissions, bench-testing, chemical synthesis) at labs and with Industry
- Understand effects on wear – ensure compatibility with both new and legacy vehicles to maximize impact



# Contact Information

---

**Kevin Stork**

**[Kevin.stork@ee.doe.gov](mailto:Kevin.stork@ee.doe.gov)**

**Web site:**

**<http://energy.gov/eere/vehicles/vehicle-technologies-office>**

