Detailed Modeling of HCCI and PCCI combustion and Multi-cylinder HCCI Engine Control

Daniel Flowers, Salvador Aceves, Joel Martinez, Francisco Espinosa

Lawrence Livermore National Laboratory

and

Robert Dibble

University of California, Berkeley

DEER Meeting

Newport, RI

August 26, 2003

We have developed and continue to improve the most advanced analysis tools for HCCI combustion

Through our collaborations we have applied these tools to a wide variety of industrially significant questions:

- **What effect does turbulence have on HCCI combustion?**
  - **Completed study of Lund TD100 engine for low turbulence geometry, now conducting simulations on high turbulence geometry**
- **What are the low load limits to HCCI operation?**
  - **Study of HCCI low-load operation limits in Sandia engine**
- **Does mixing affect CO emissions in HCCI combustion?**
  - **Extended multi-zone model includes mixing effects – framework for general tool to analyze of HCCI, PCCI, SCCI**
  - **Analyzed post-combustion mixing and CO formation in HCCI engine**

Our detailed chemical kinetics codes and optimization software guide our experimental control efforts

- **What control methods are viable for multi-cylinder HCCI engines?**
  - **Designed and tested a generic control system for internal EGR control of cylinder by cylinder variation in 4-cylinder engine**
  - **Implementing closed loop feedback control for cylinder-by-cylinder phase balancing**

Outline

Through our collaborations we have applied these tools to a wide variety of industrially significant questions:

- What effect does turbulence have on HCCI combustion?
  - Completed study of Lund TD100 engine for low turbulence geometry, now conducting simulations on high turbulence geometry
- What are the low load limits to HCCI operation?
  - Study of HCCI low-load operation limits in Sandia engine
- Does mixing affect CO emissions in HCCI combustion?
  - Extended multi-zone model includes mixing effects – framework for general tool to analyze of HCCI, PCCI, SCCI
  - Analyzed post-combustion mixing and CO formation in HCCI engine

What is the role of turbulence in HCCI engines?

- **Lund Institute studied HCCI operation in high and low turbulence engines**
- **These experiments showed that burn durations in higher turbulence configuration were significantly longer**
- **Debate raised about turbulence influence on the ignition process**
- **We conjecture that chemistry timescales are far too rapid to be affected by local turbulence timescales**

Lower turbulence piston crown

Higher turbulence piston crown

We have completed simulations with the flat-top (lower turbulence) geometry that agree very well with experiments

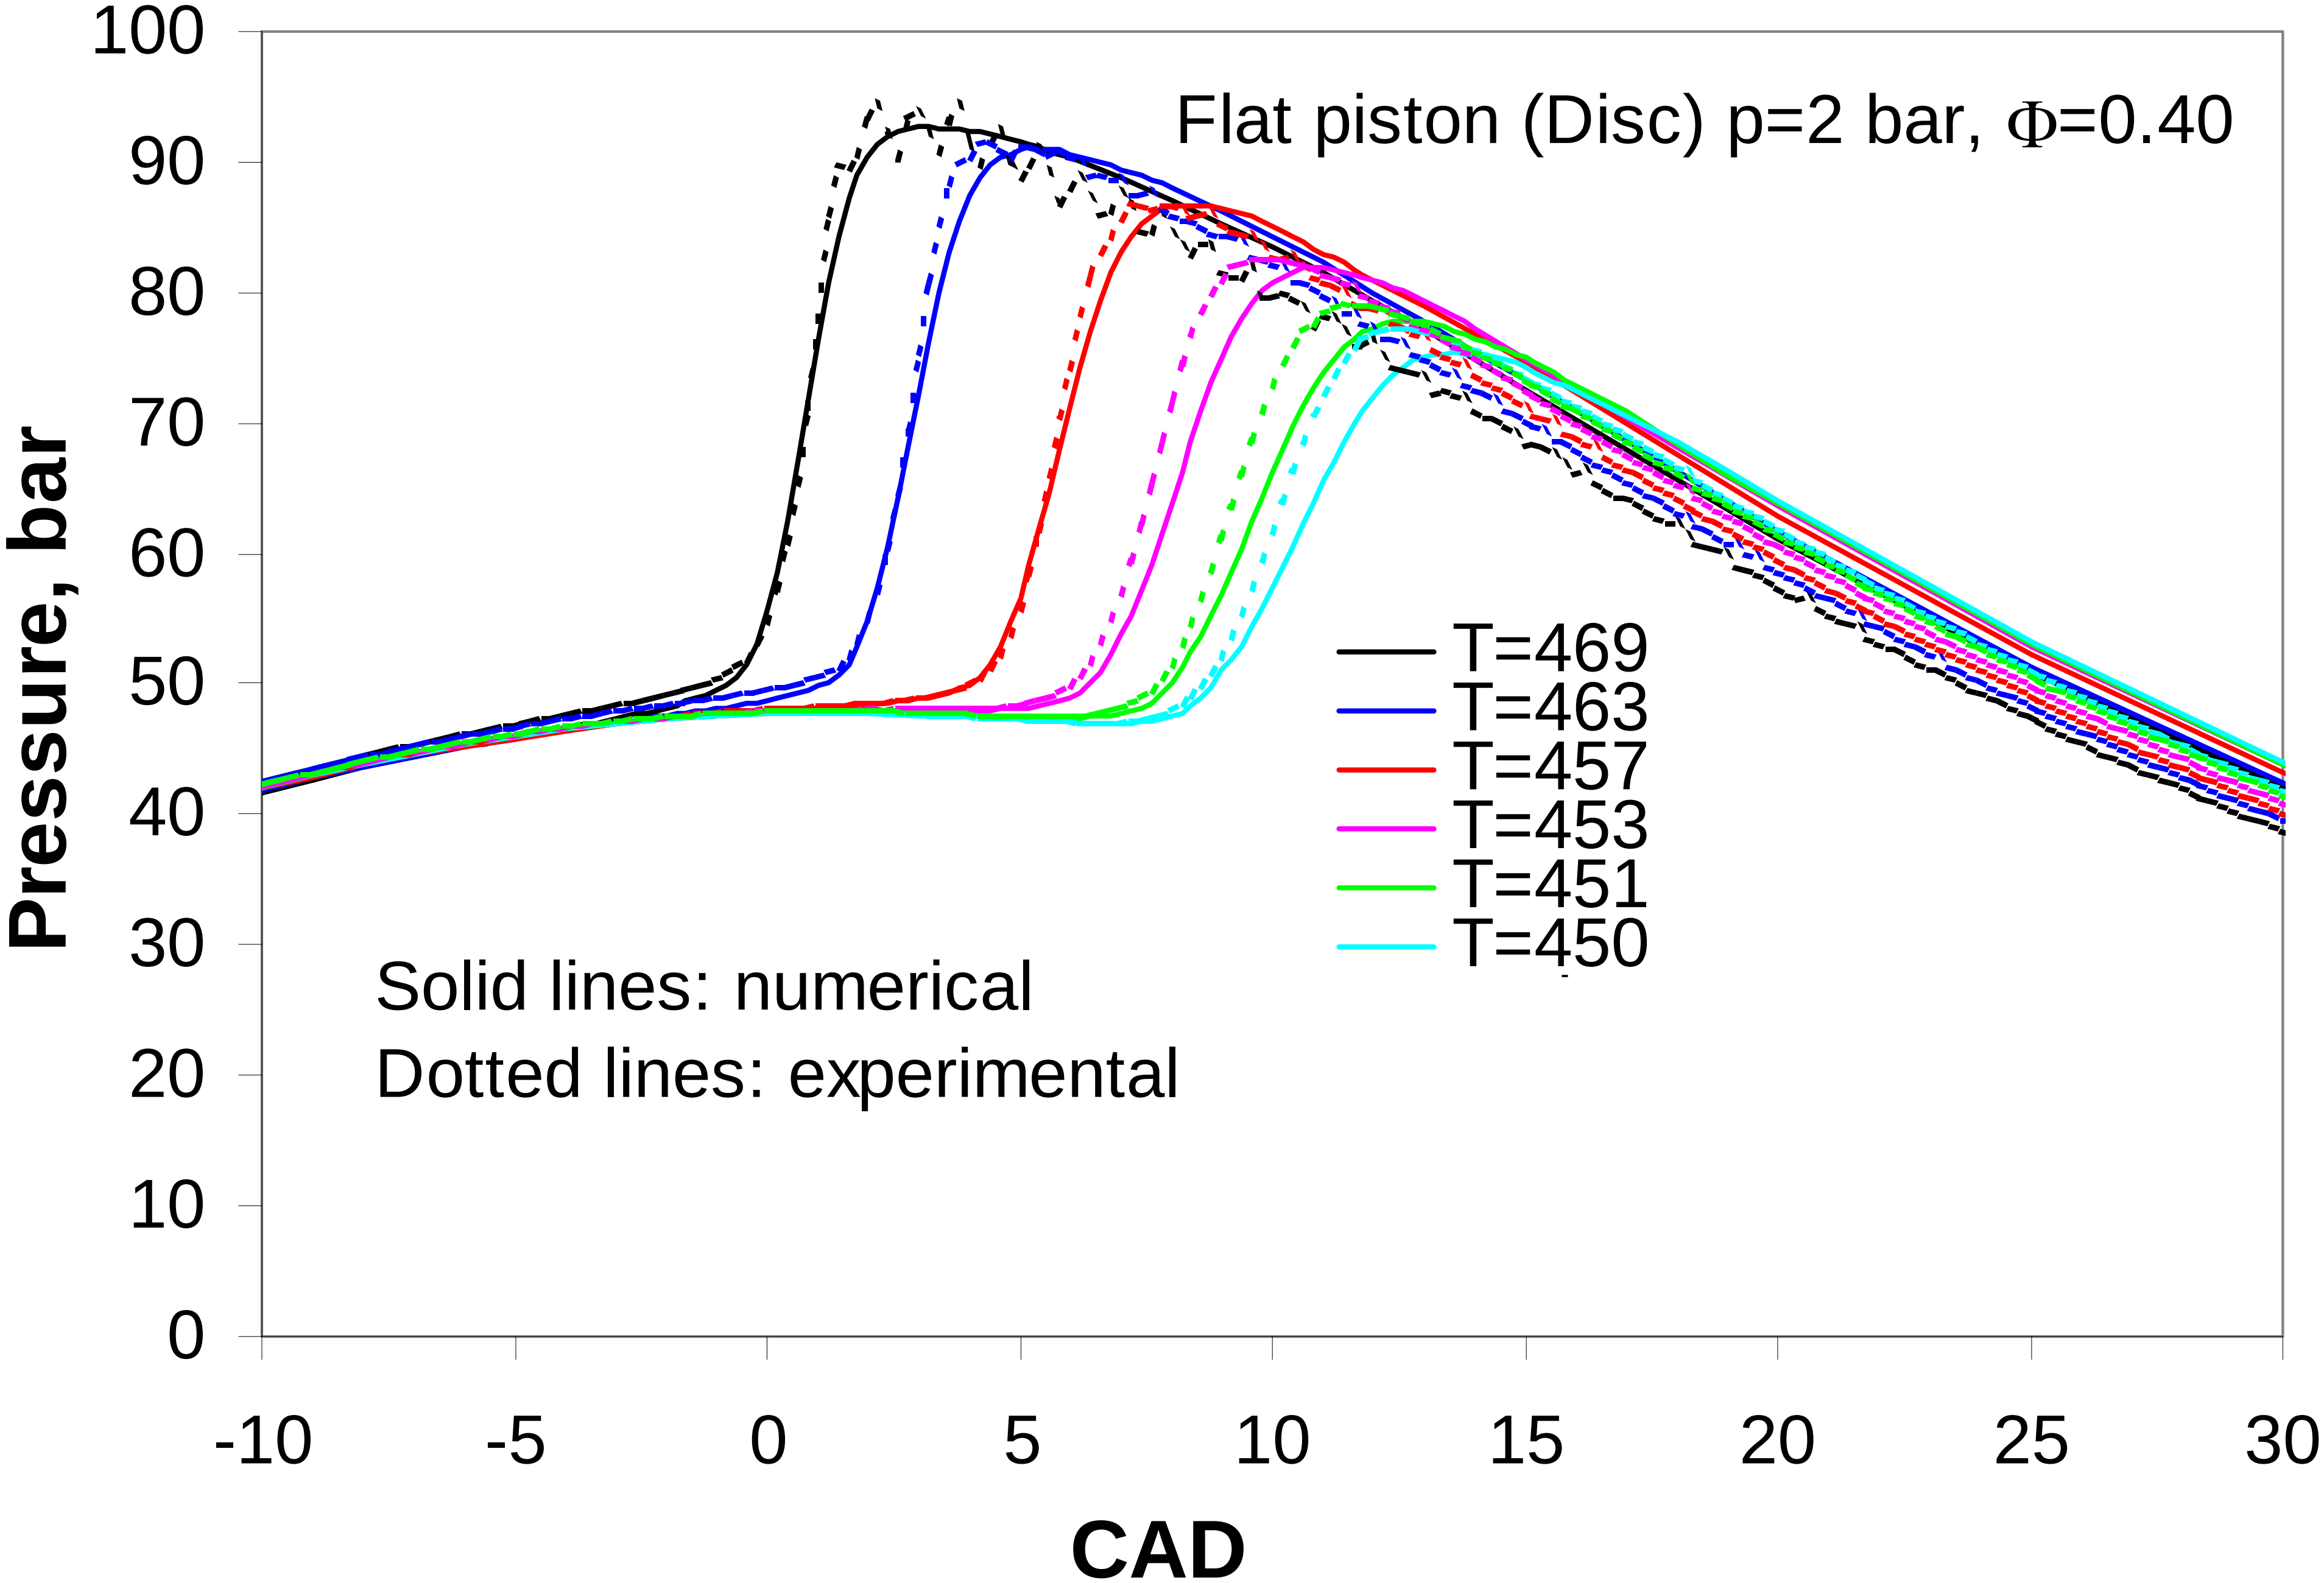

Simulations have been completed for the low turbulence case, high turbulence case is in progress

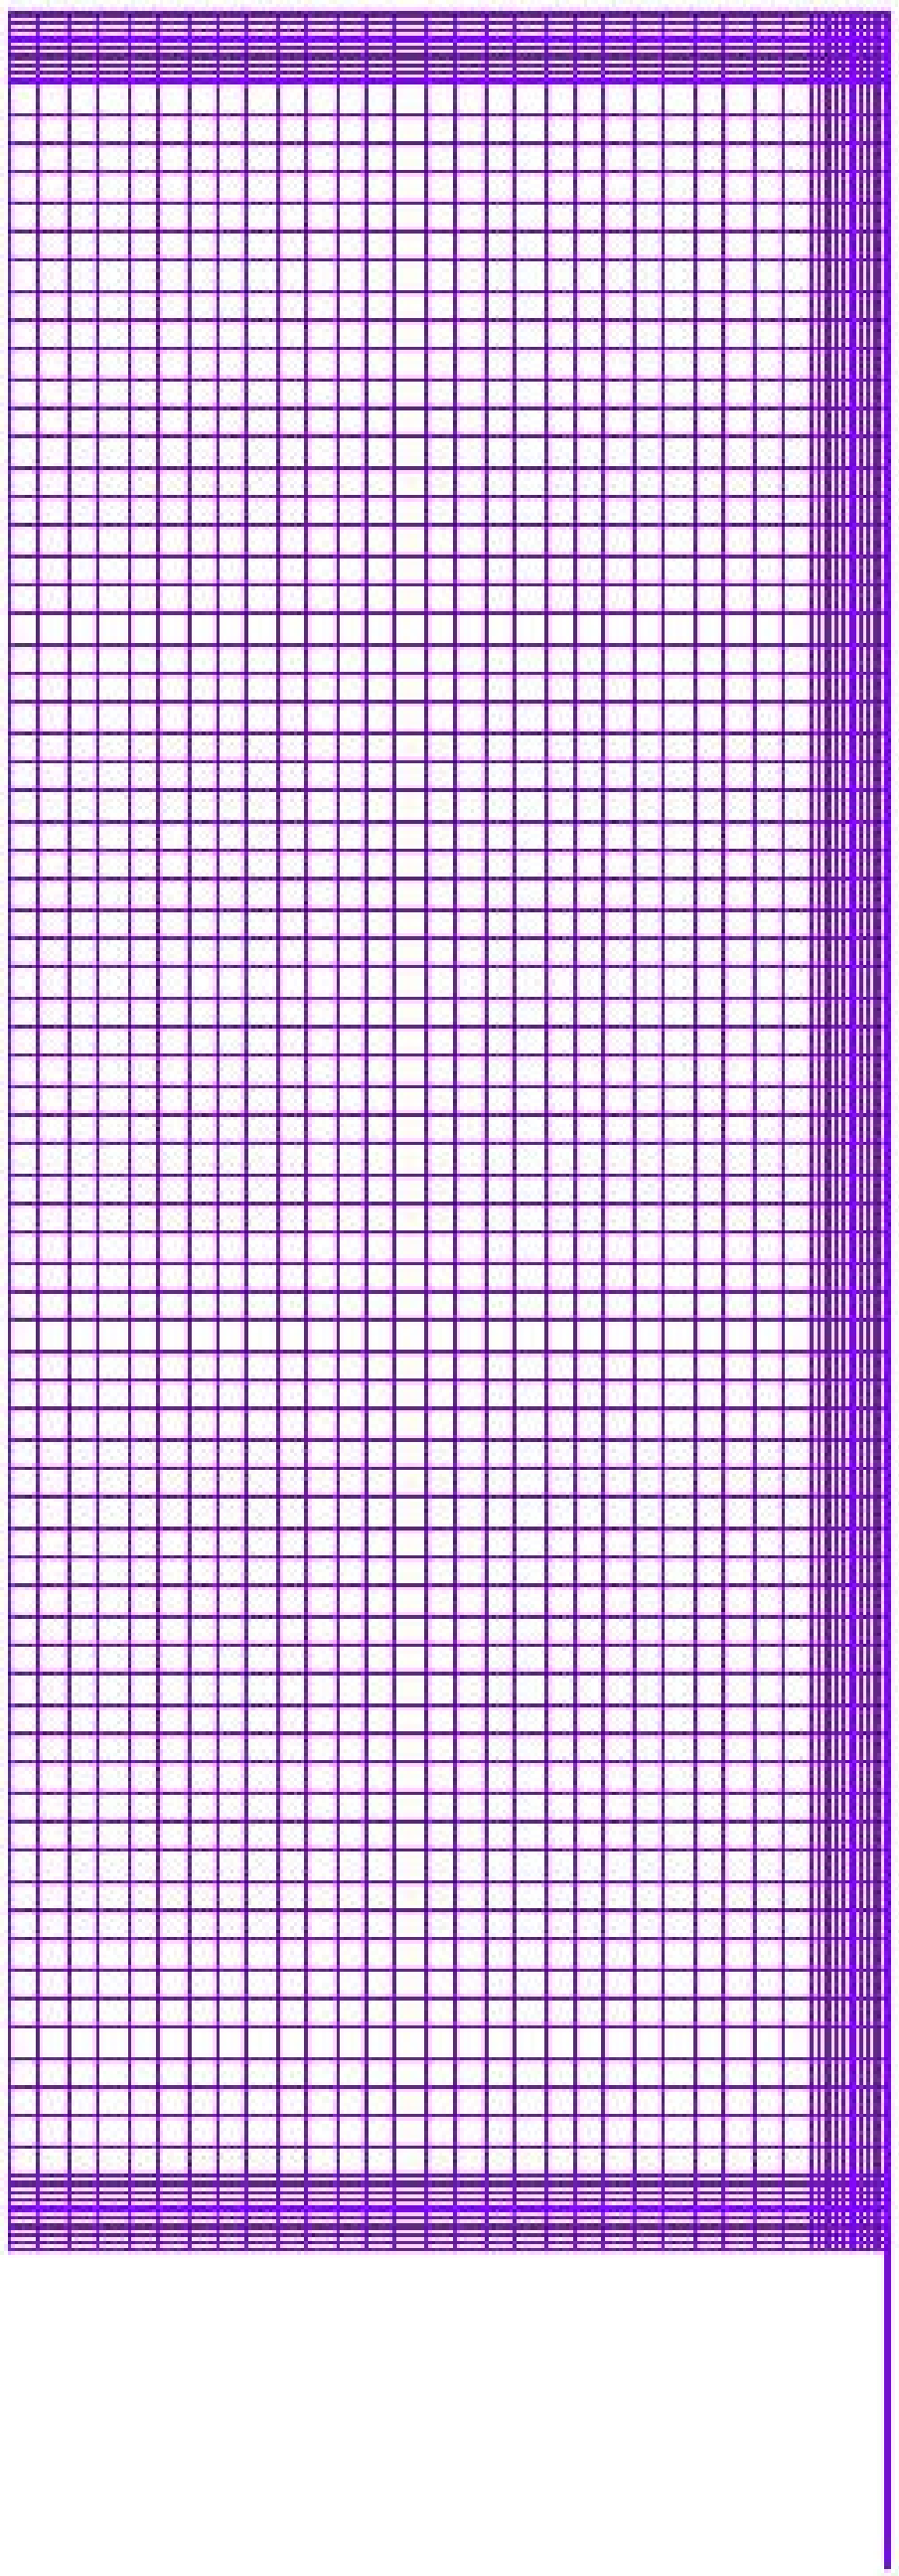

Flat crown (60K cells)

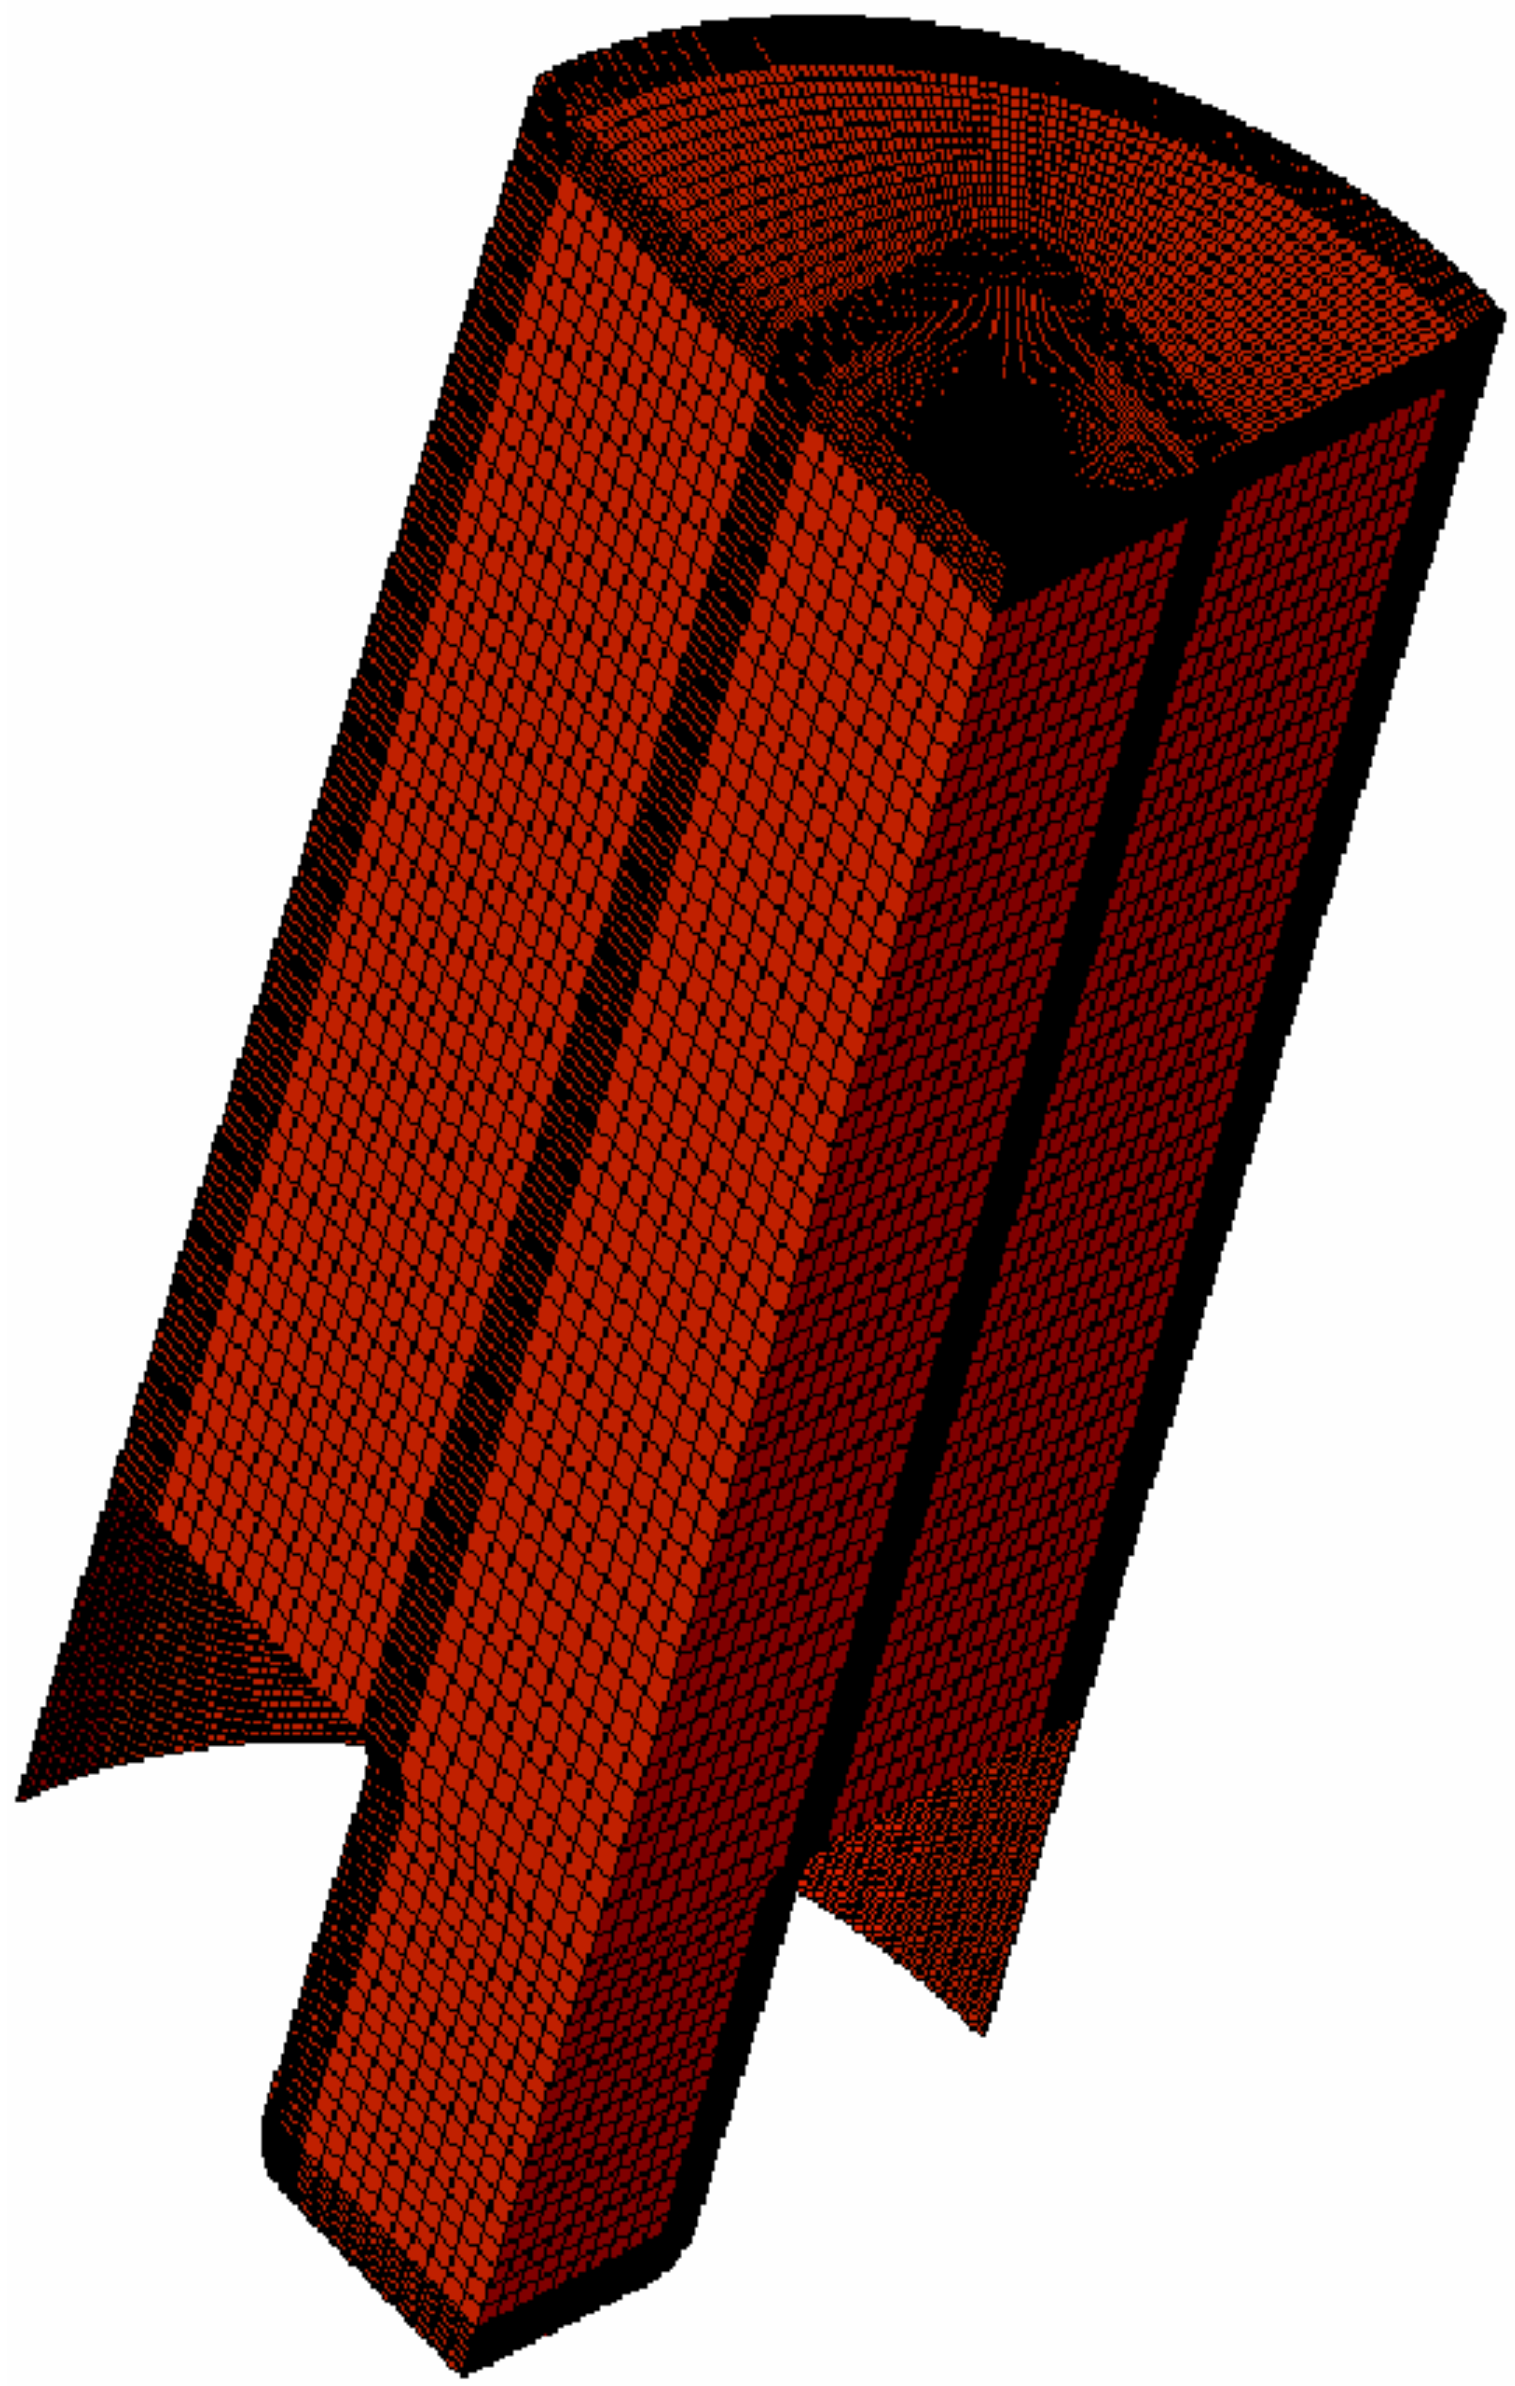

Square Bowl Crown (400K cells)

Outline

Through our collaborations we have applied these tools to a wide variety of industrially significant questions:

- What effect does turbulence have on HCCI combustion?
  - Completed study of Lund TD100 engine for low turbulence geometry, now conducting simulations on high turbulence geometry
- What are the low load limits to HCCI operation?
  - Study of HCCI low-load operation limits in Sandia engine
- Does mixing affect CO emissions in HCCI combustion?
  - Extended multi-zone model includes mixing effects – framework for general tool to analyze of HCCI, PCCI, SCCI
  - Analyzed post-combustion mixing and CO formation in HCCI engine

Experiments in the Sandia HCCI engine show very inefficient combustion as equivalence ratio is reduced

Experimental isooctane HCCI data from the Sandia Engine

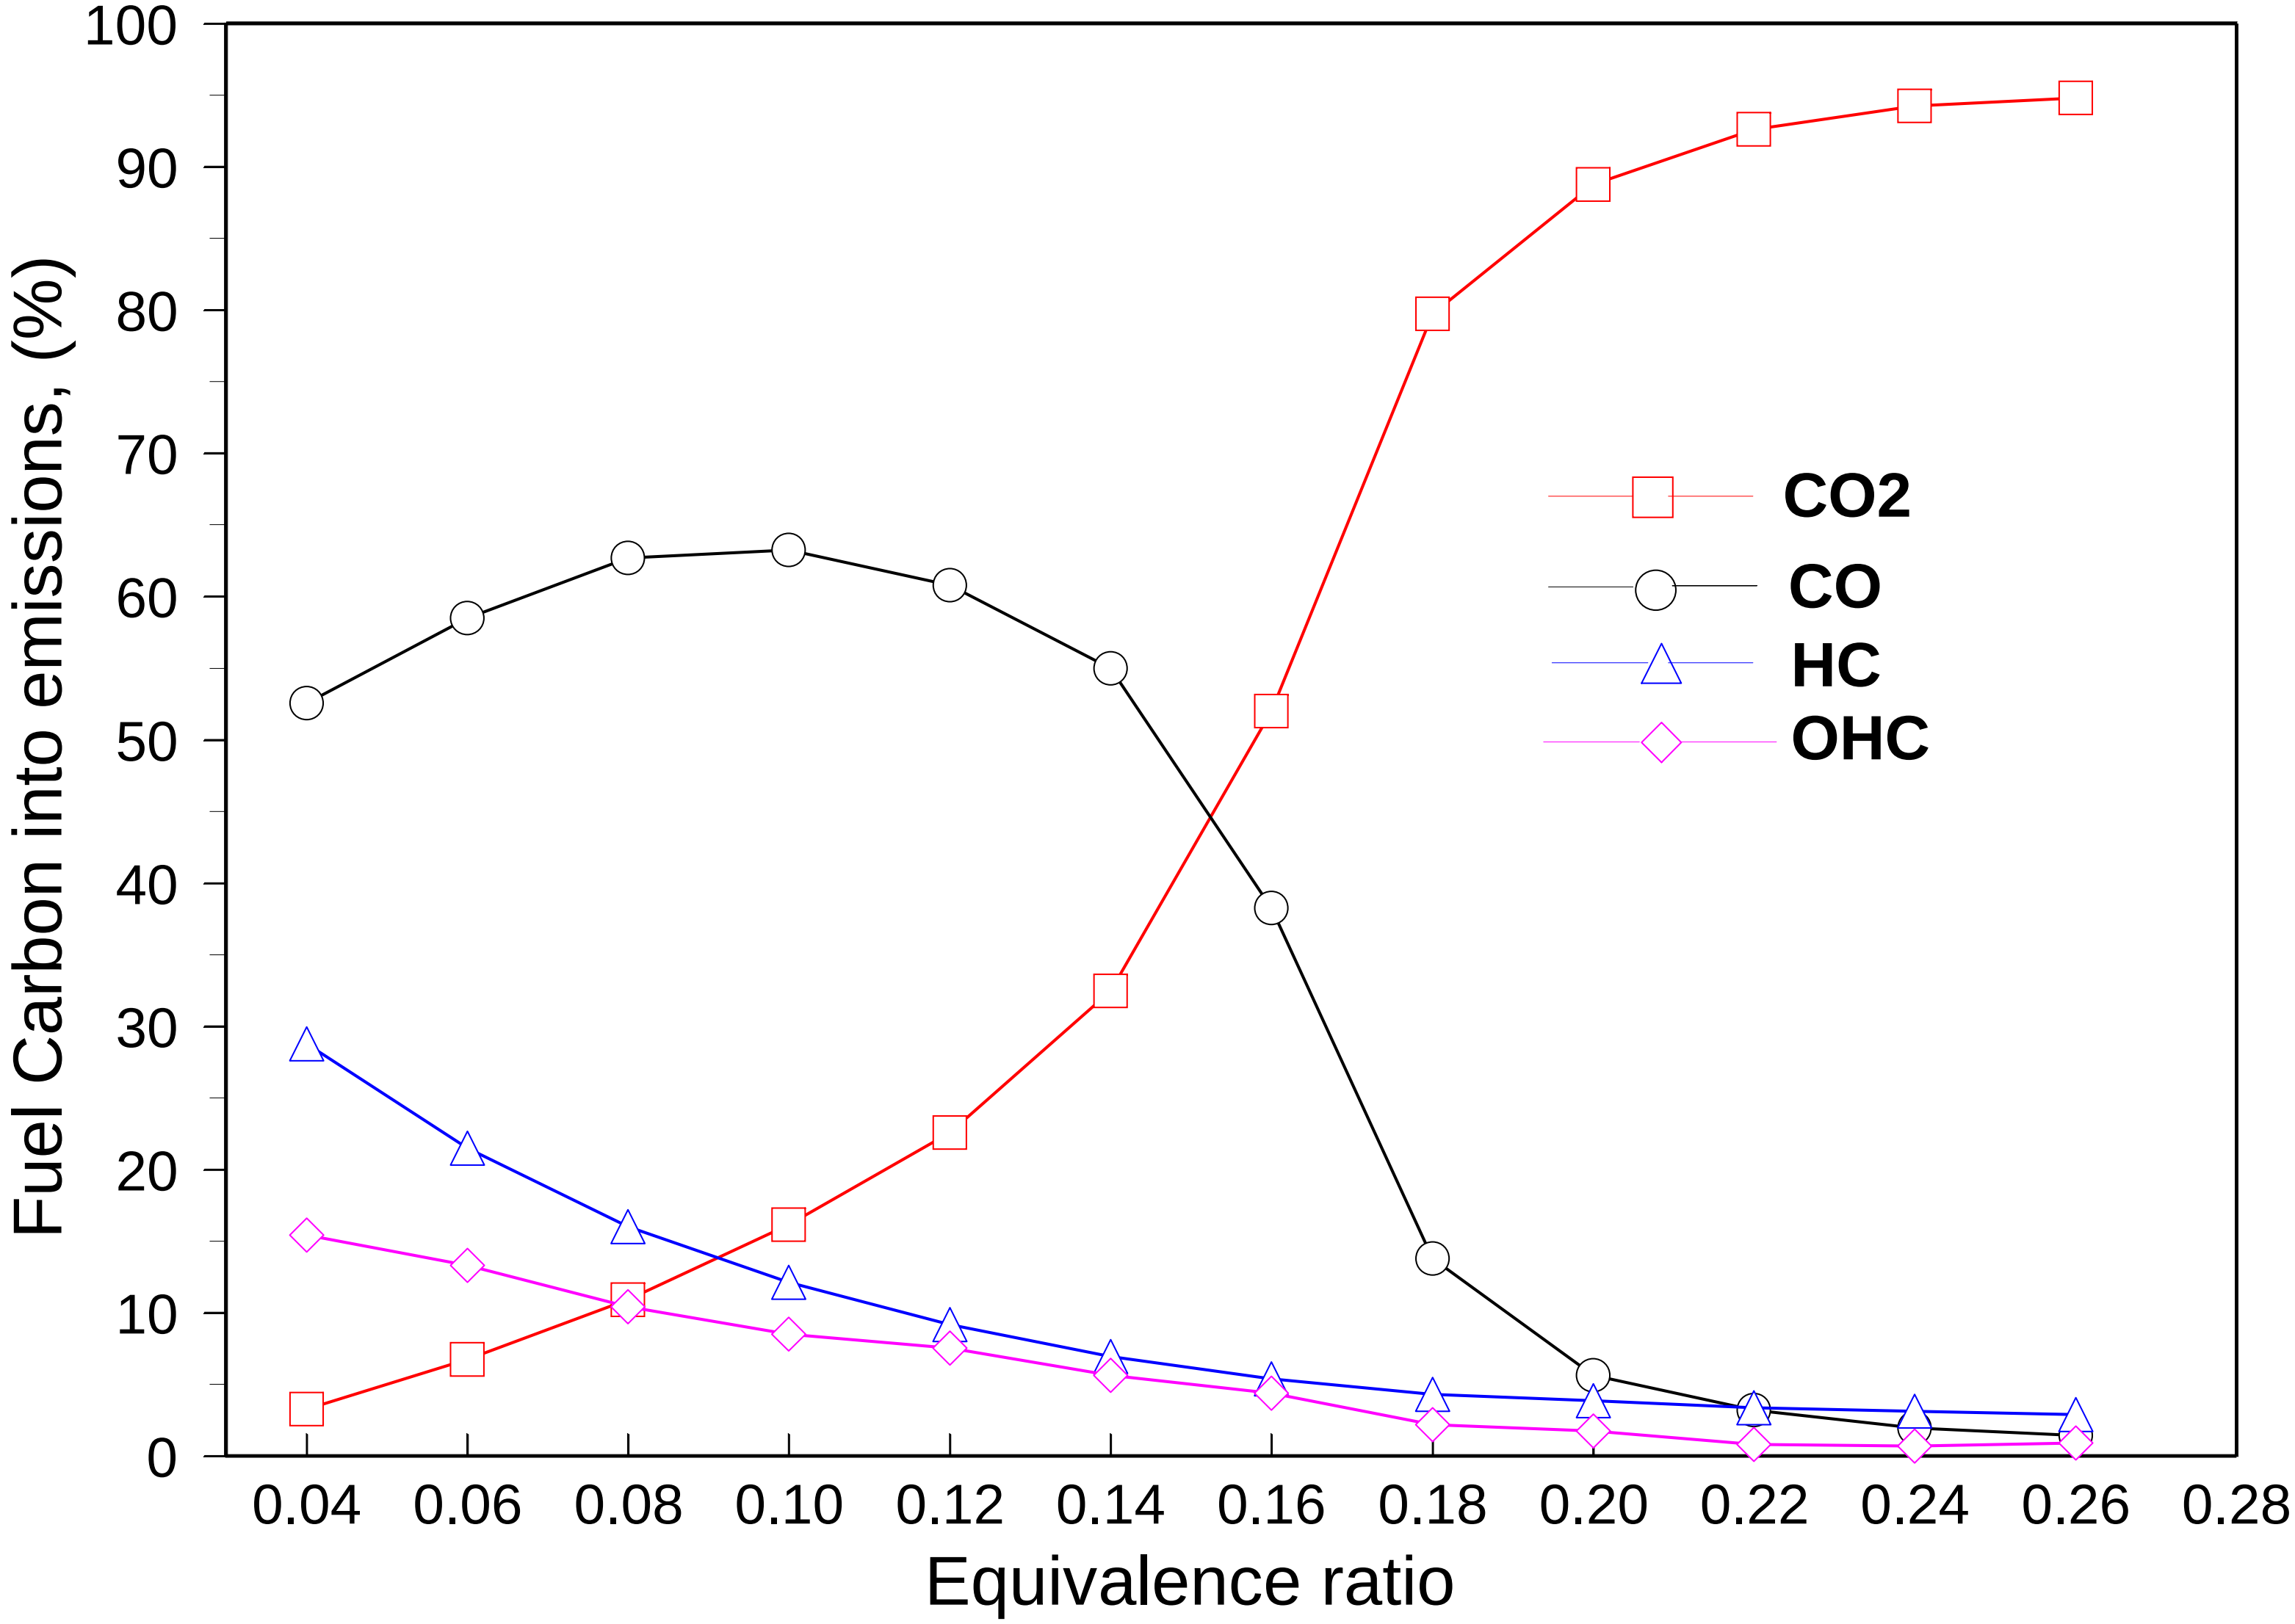

Simulations agree well with experiment

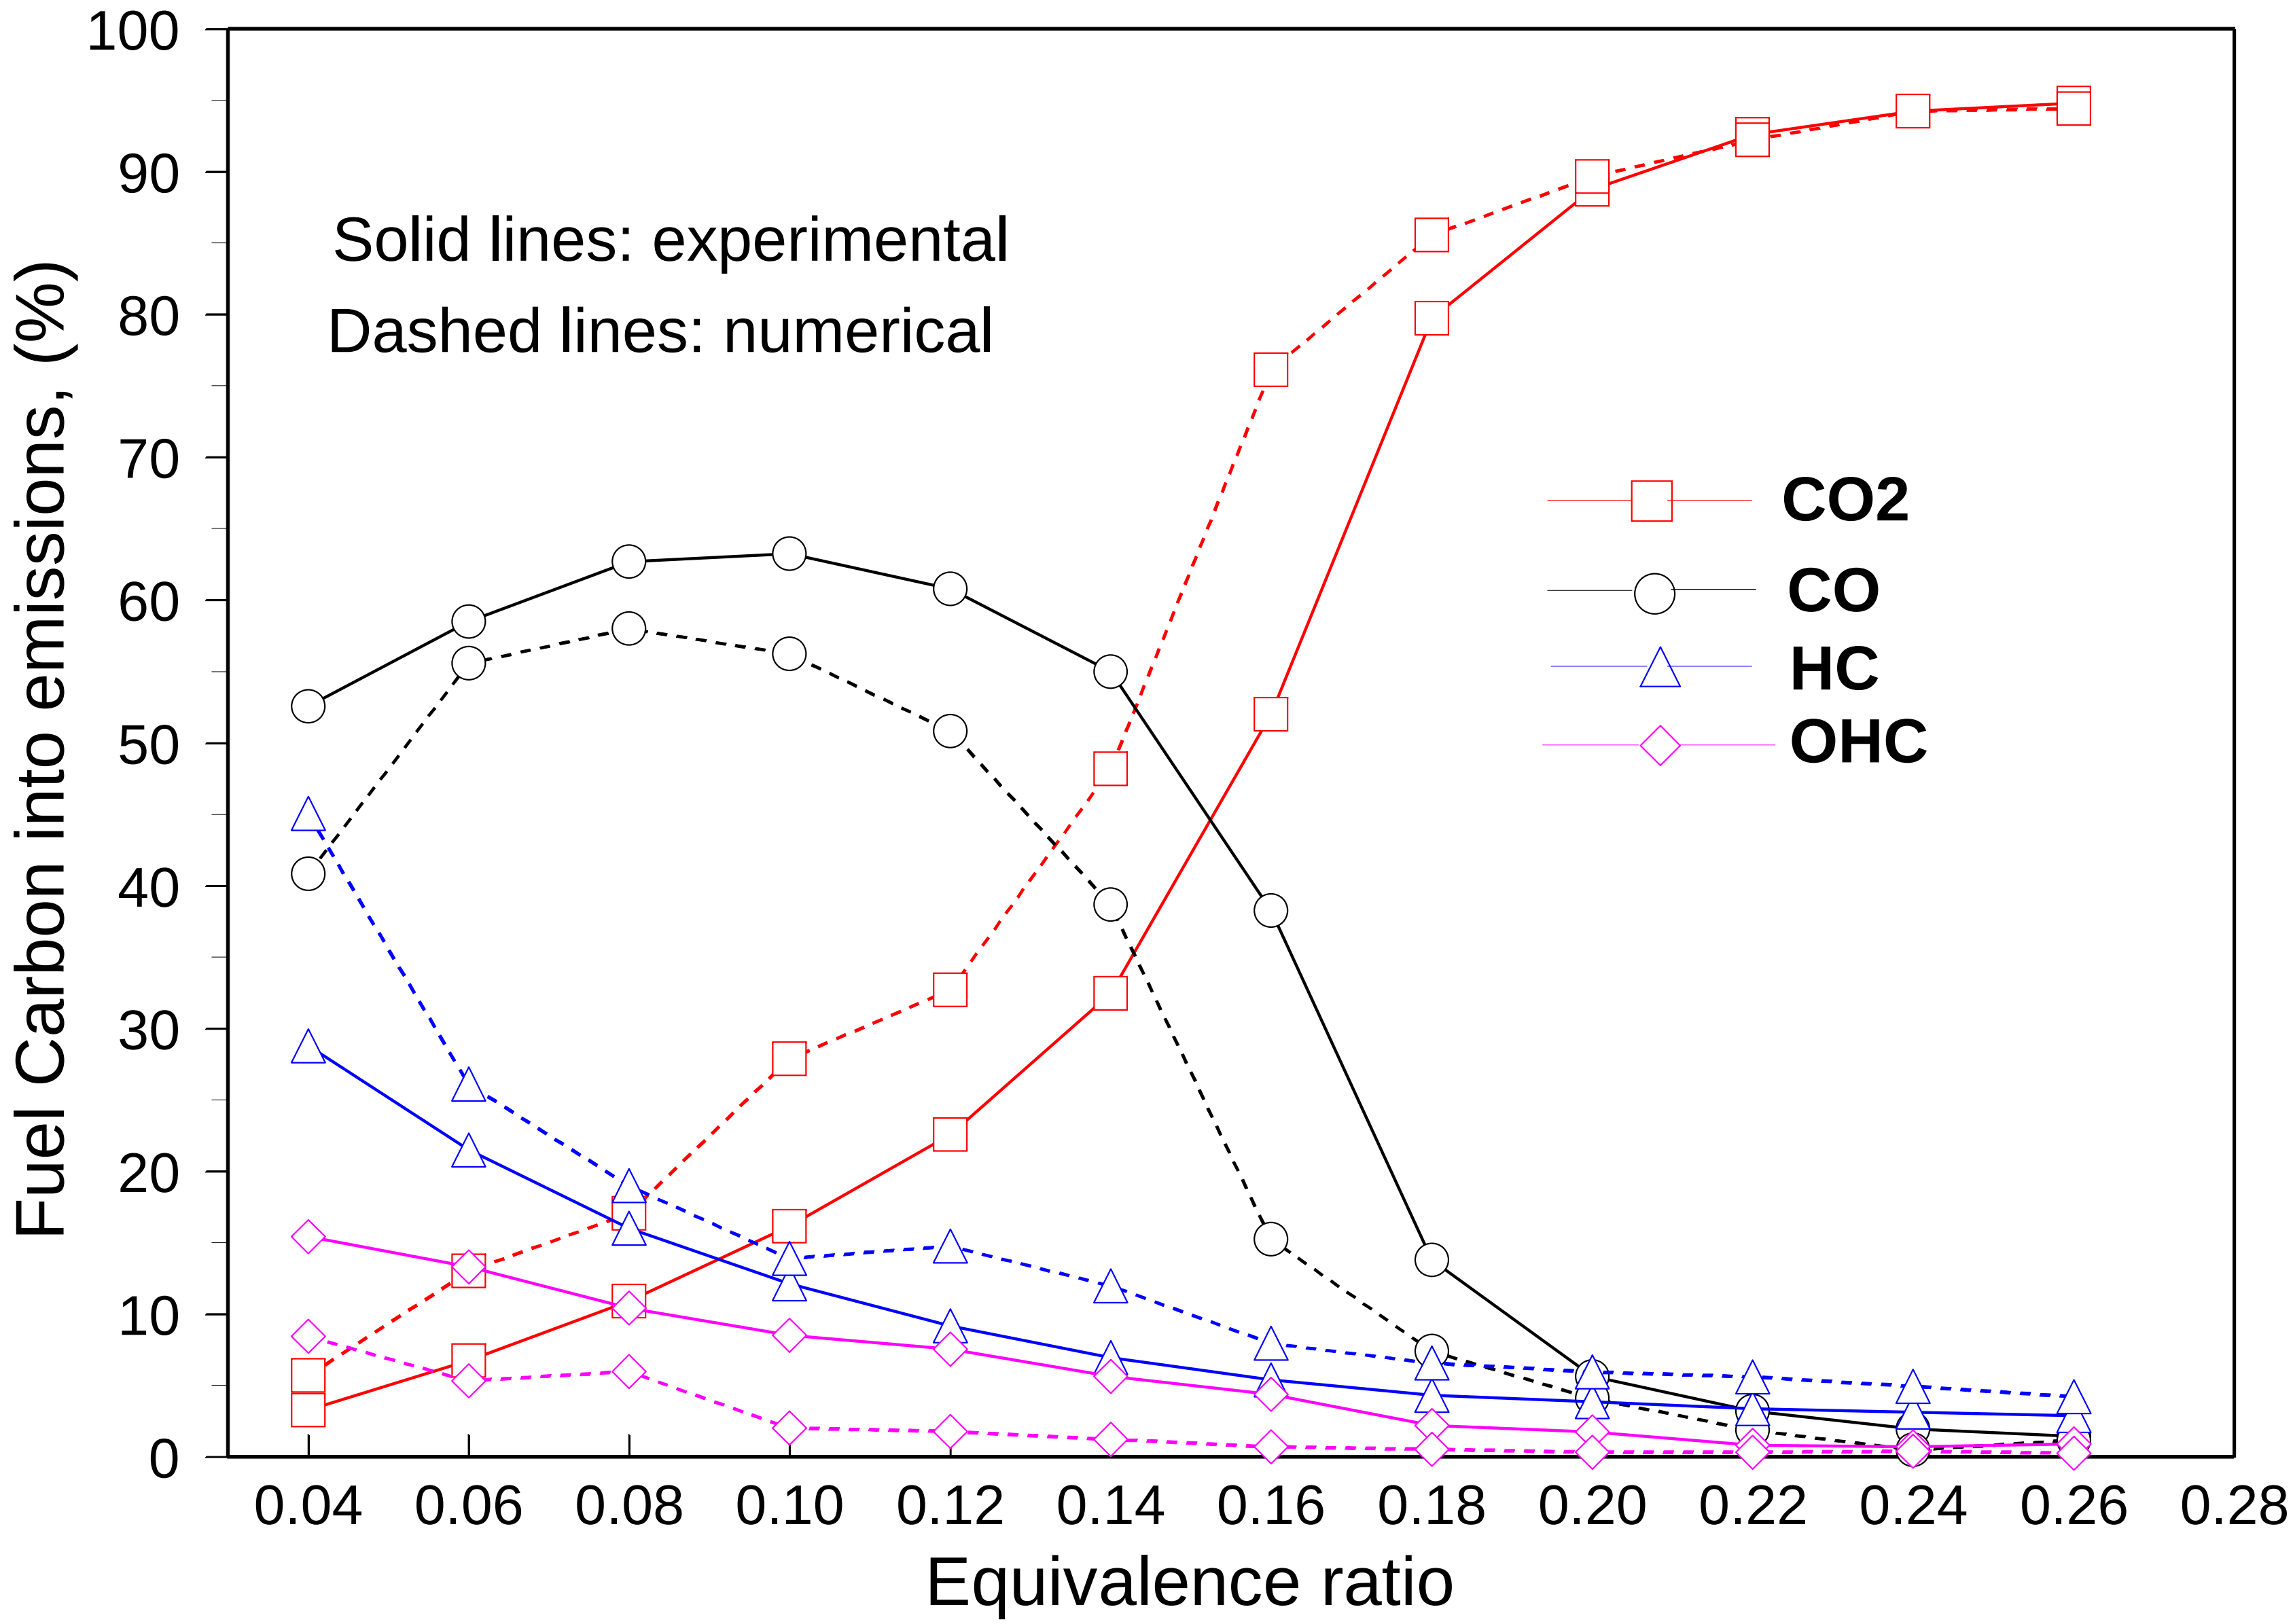

Our multi-zone model gives insight into the reduced combustion efficiency as equivalence ratio decreases

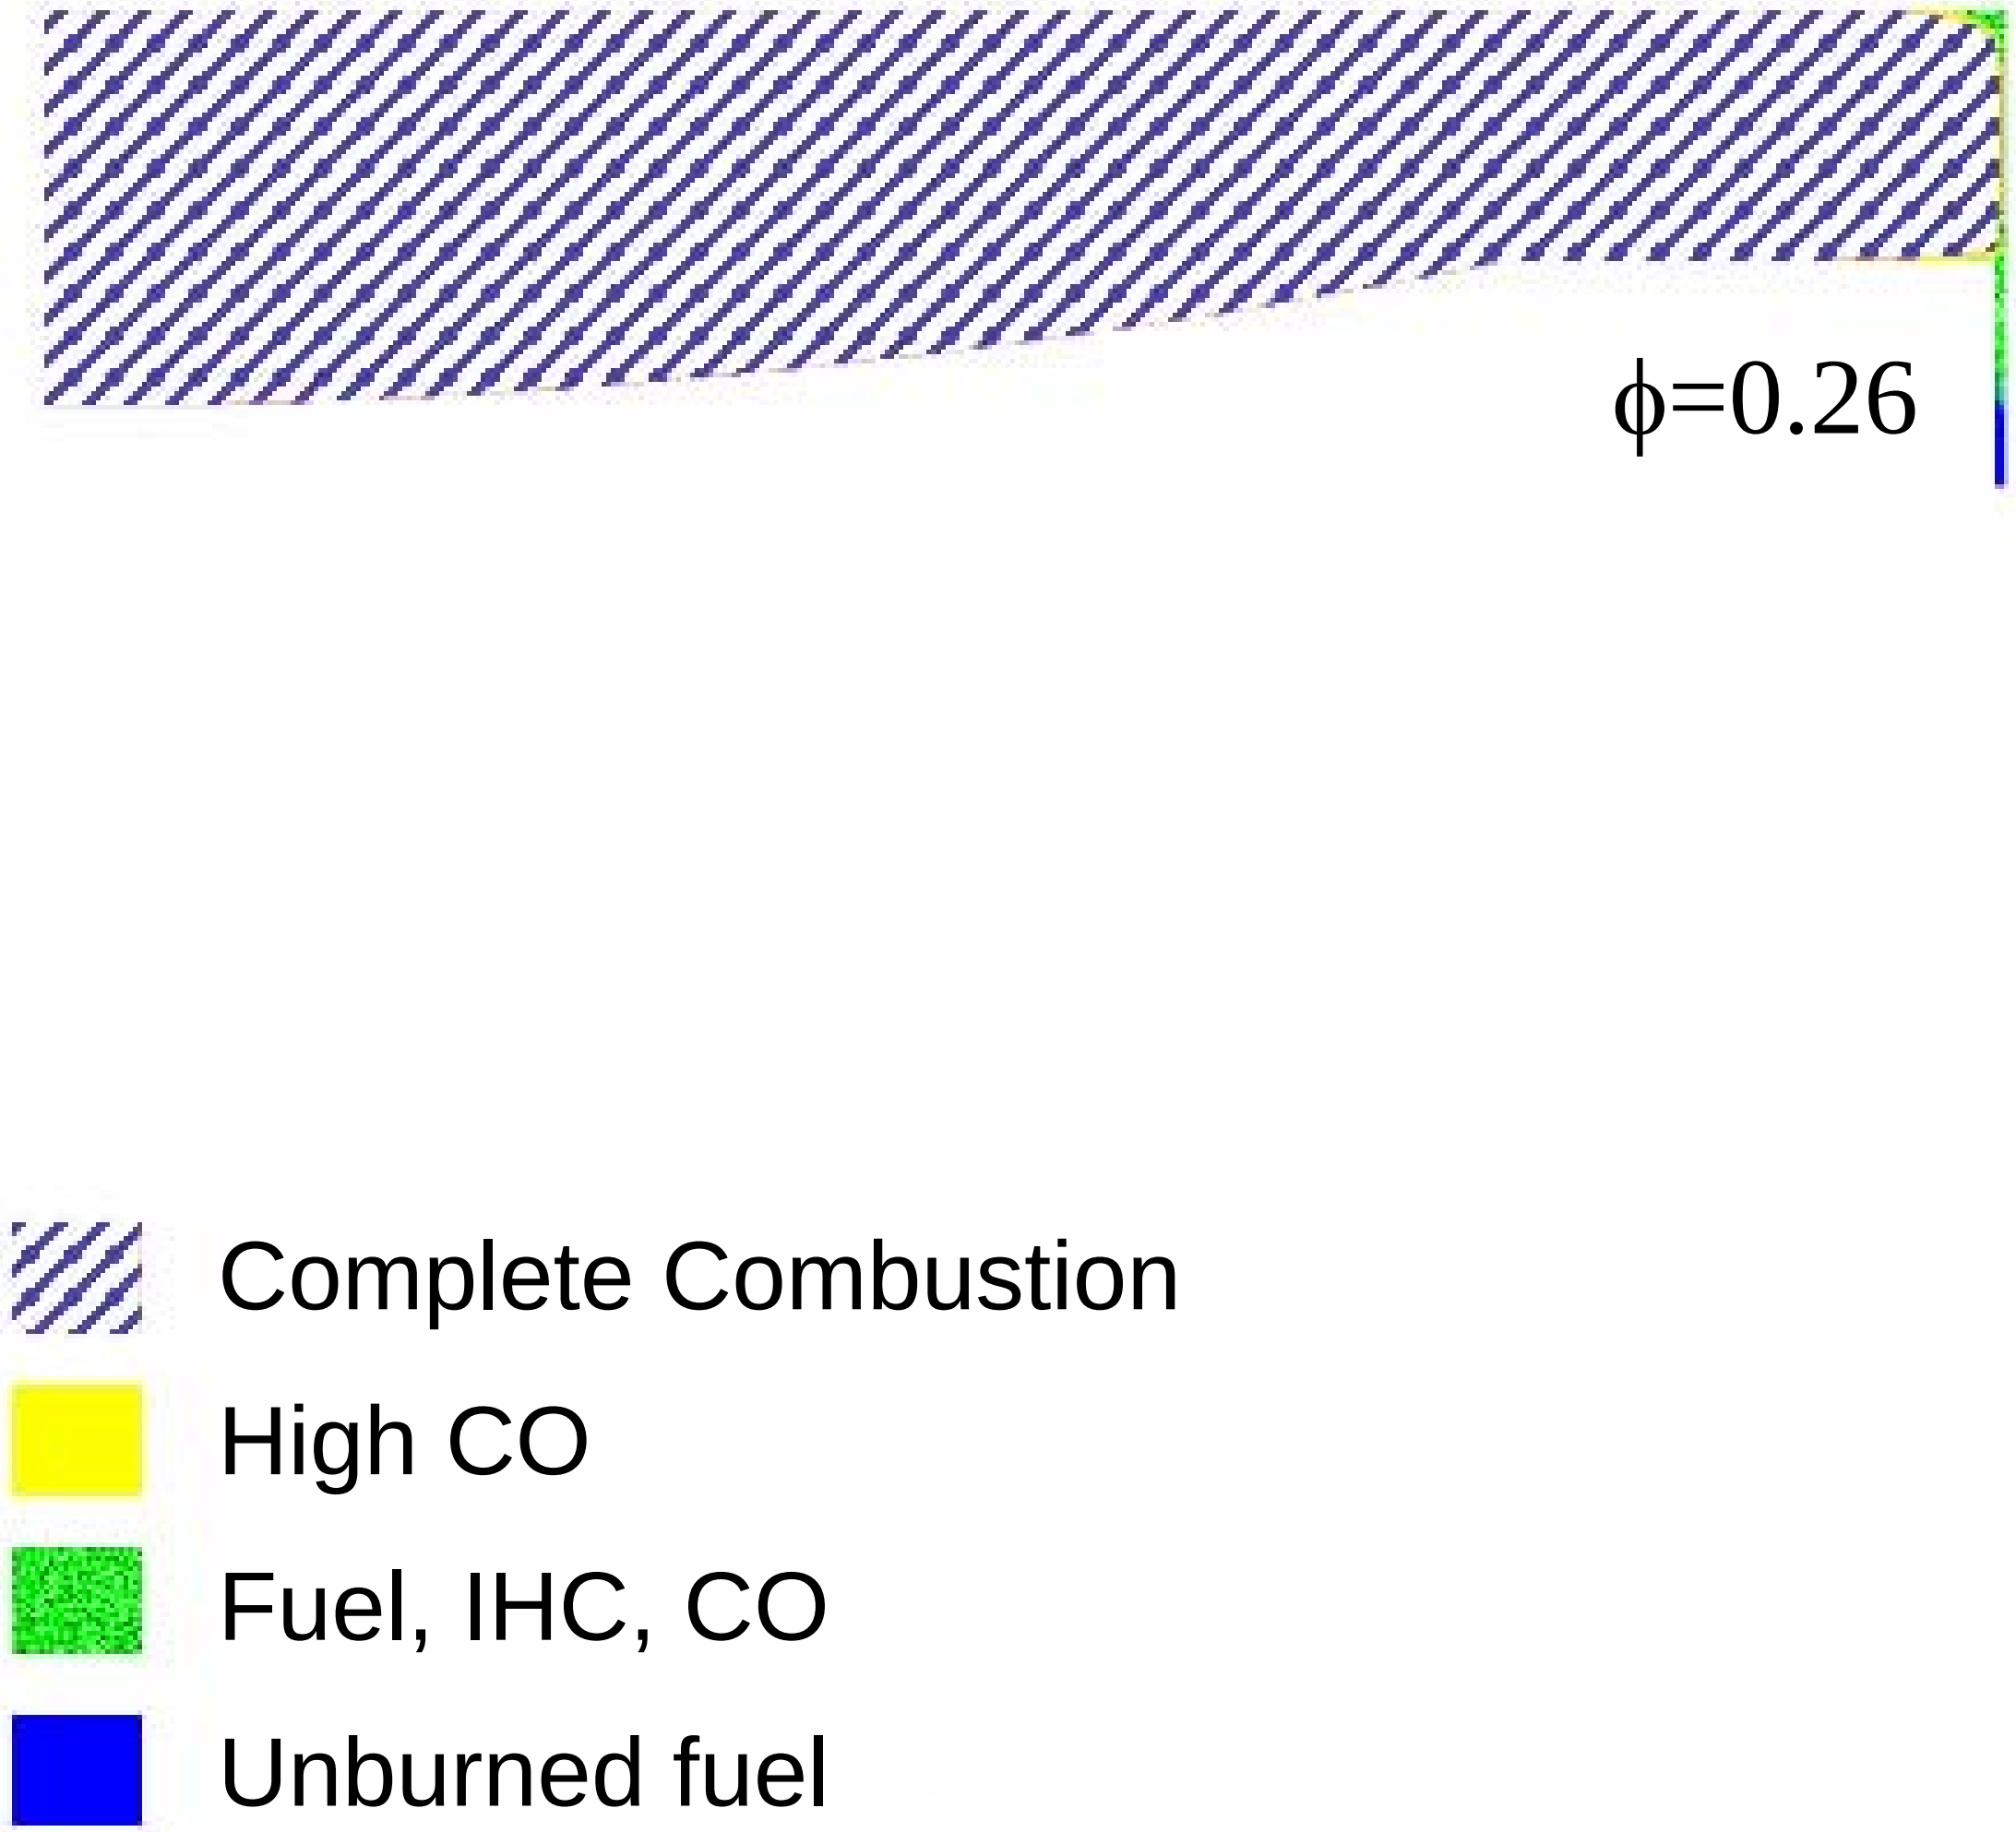

Our multi-zone model gives insight into the reduced combustion efficiency as equivalence ratio decreases

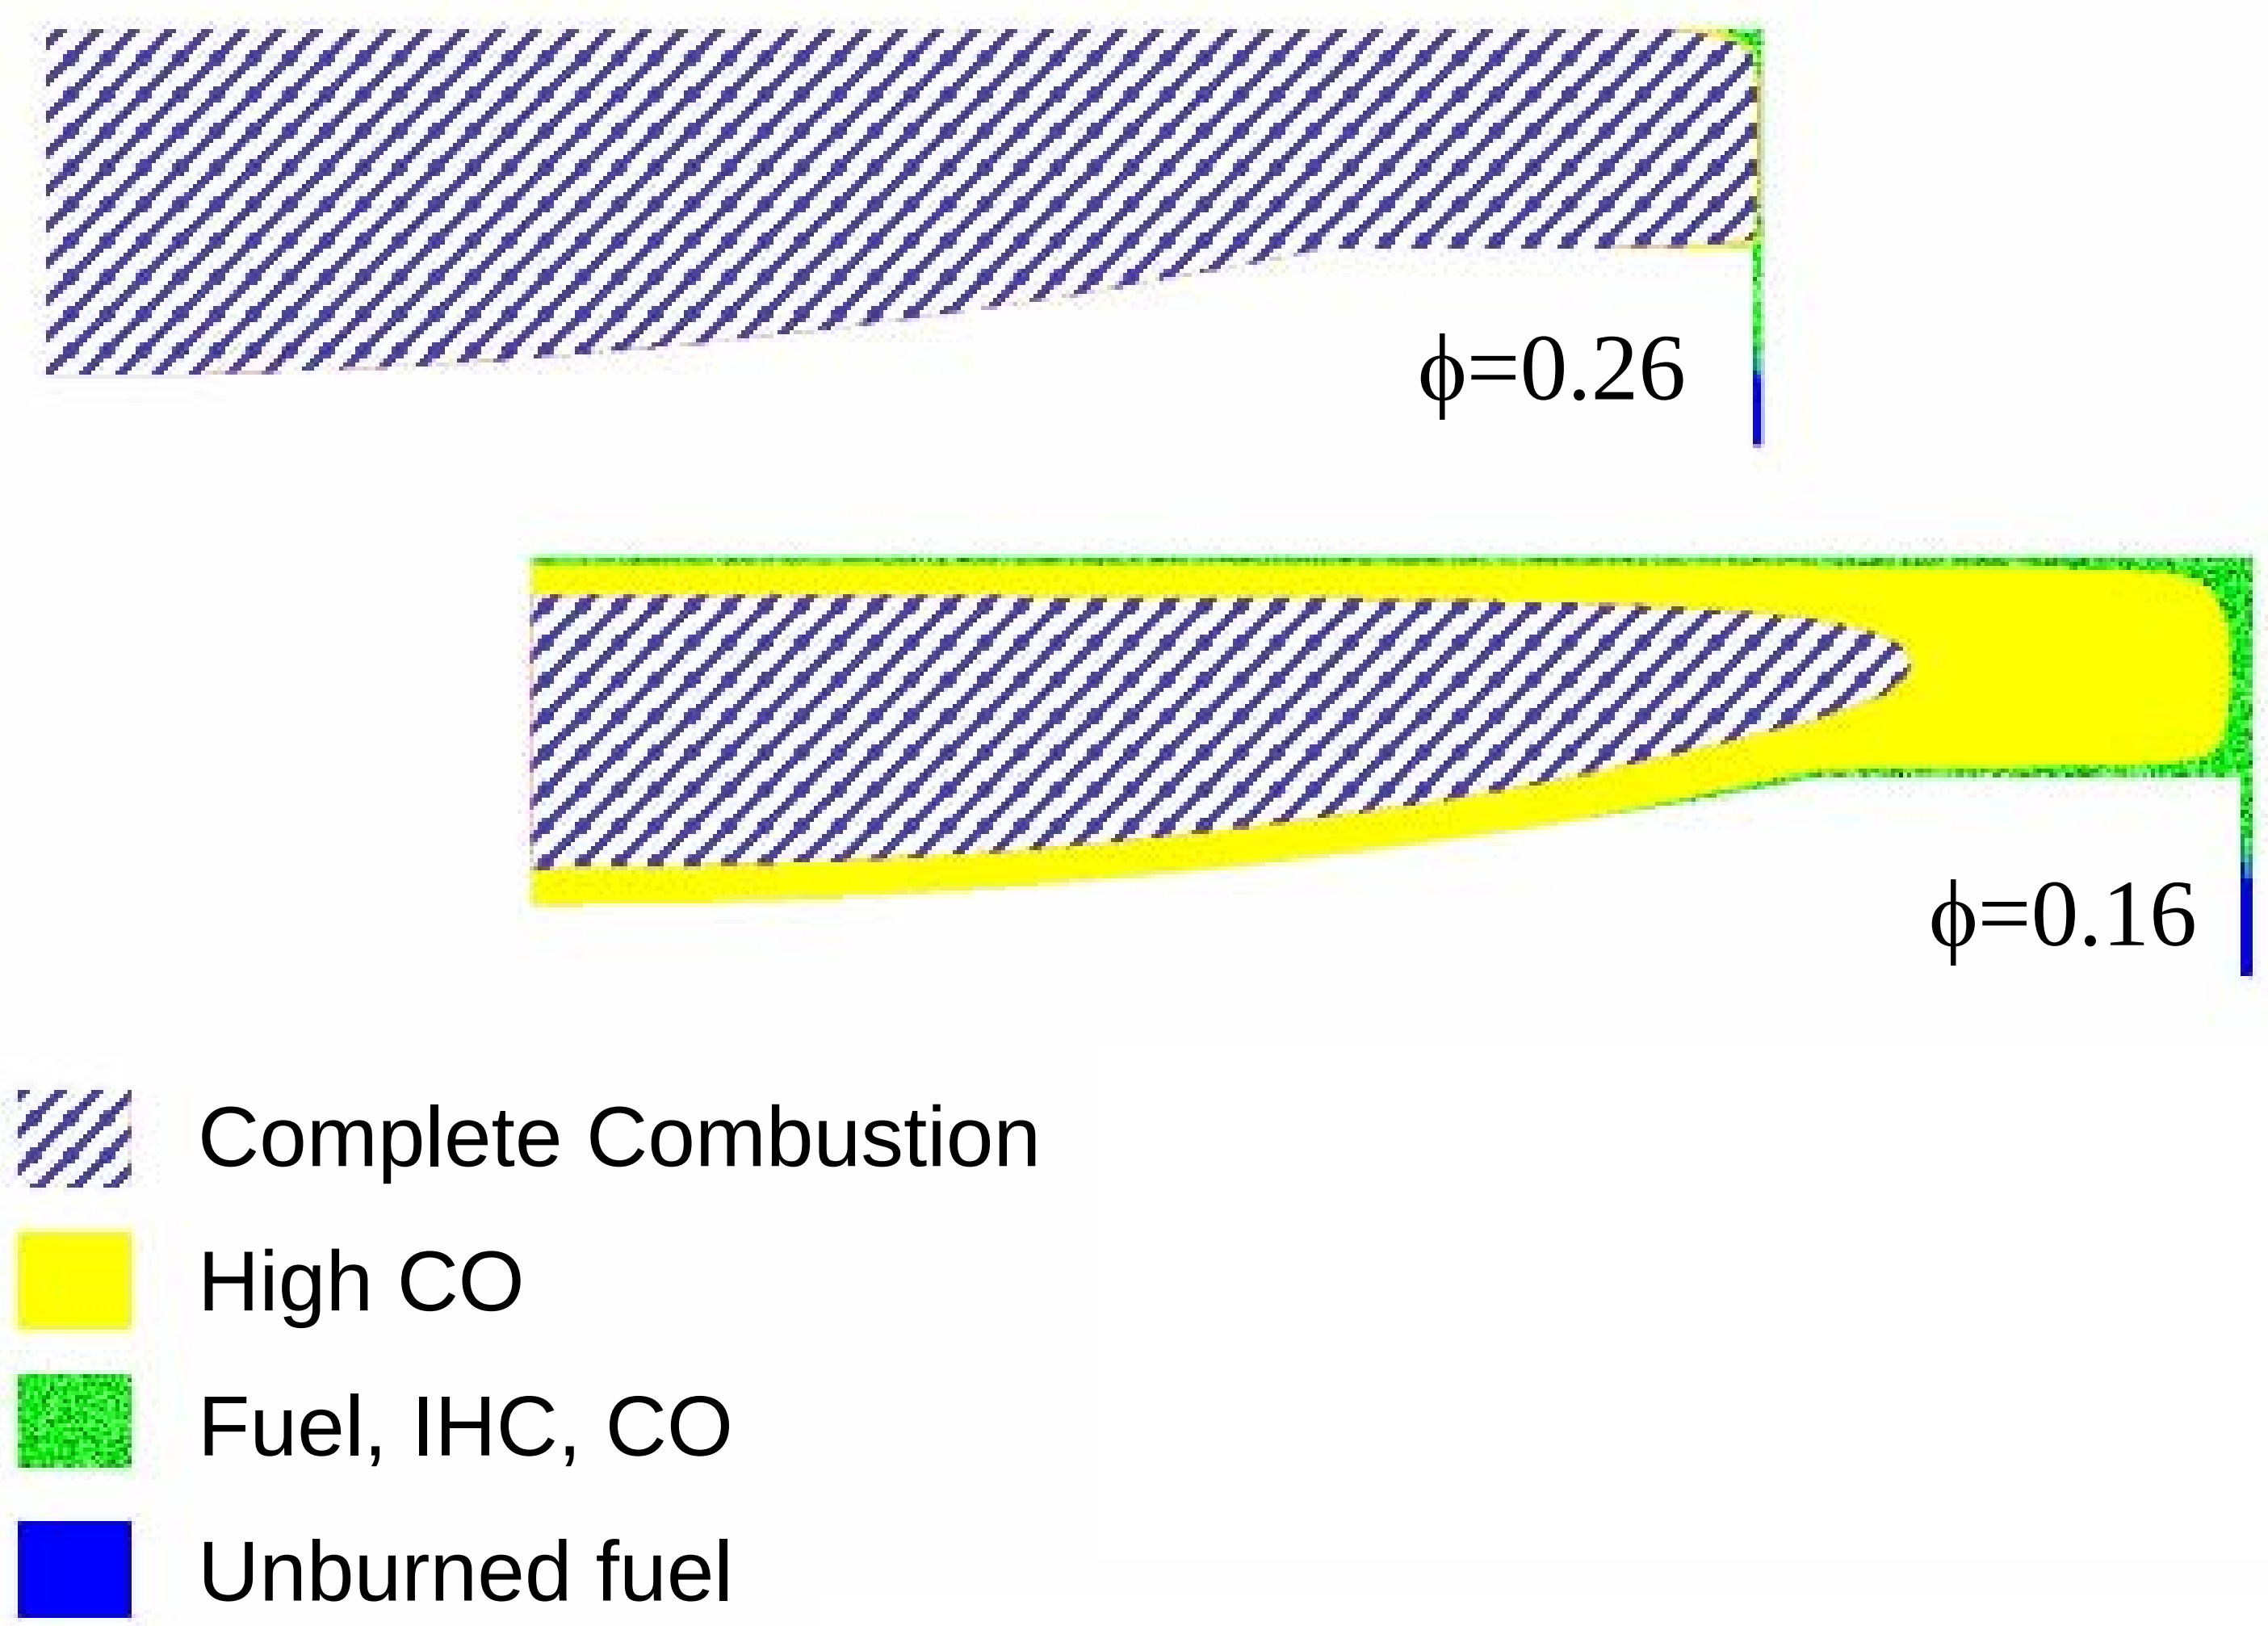

Our multi-zone model gives insight into the reduced combustion efficiency as equivalence ratio decreases

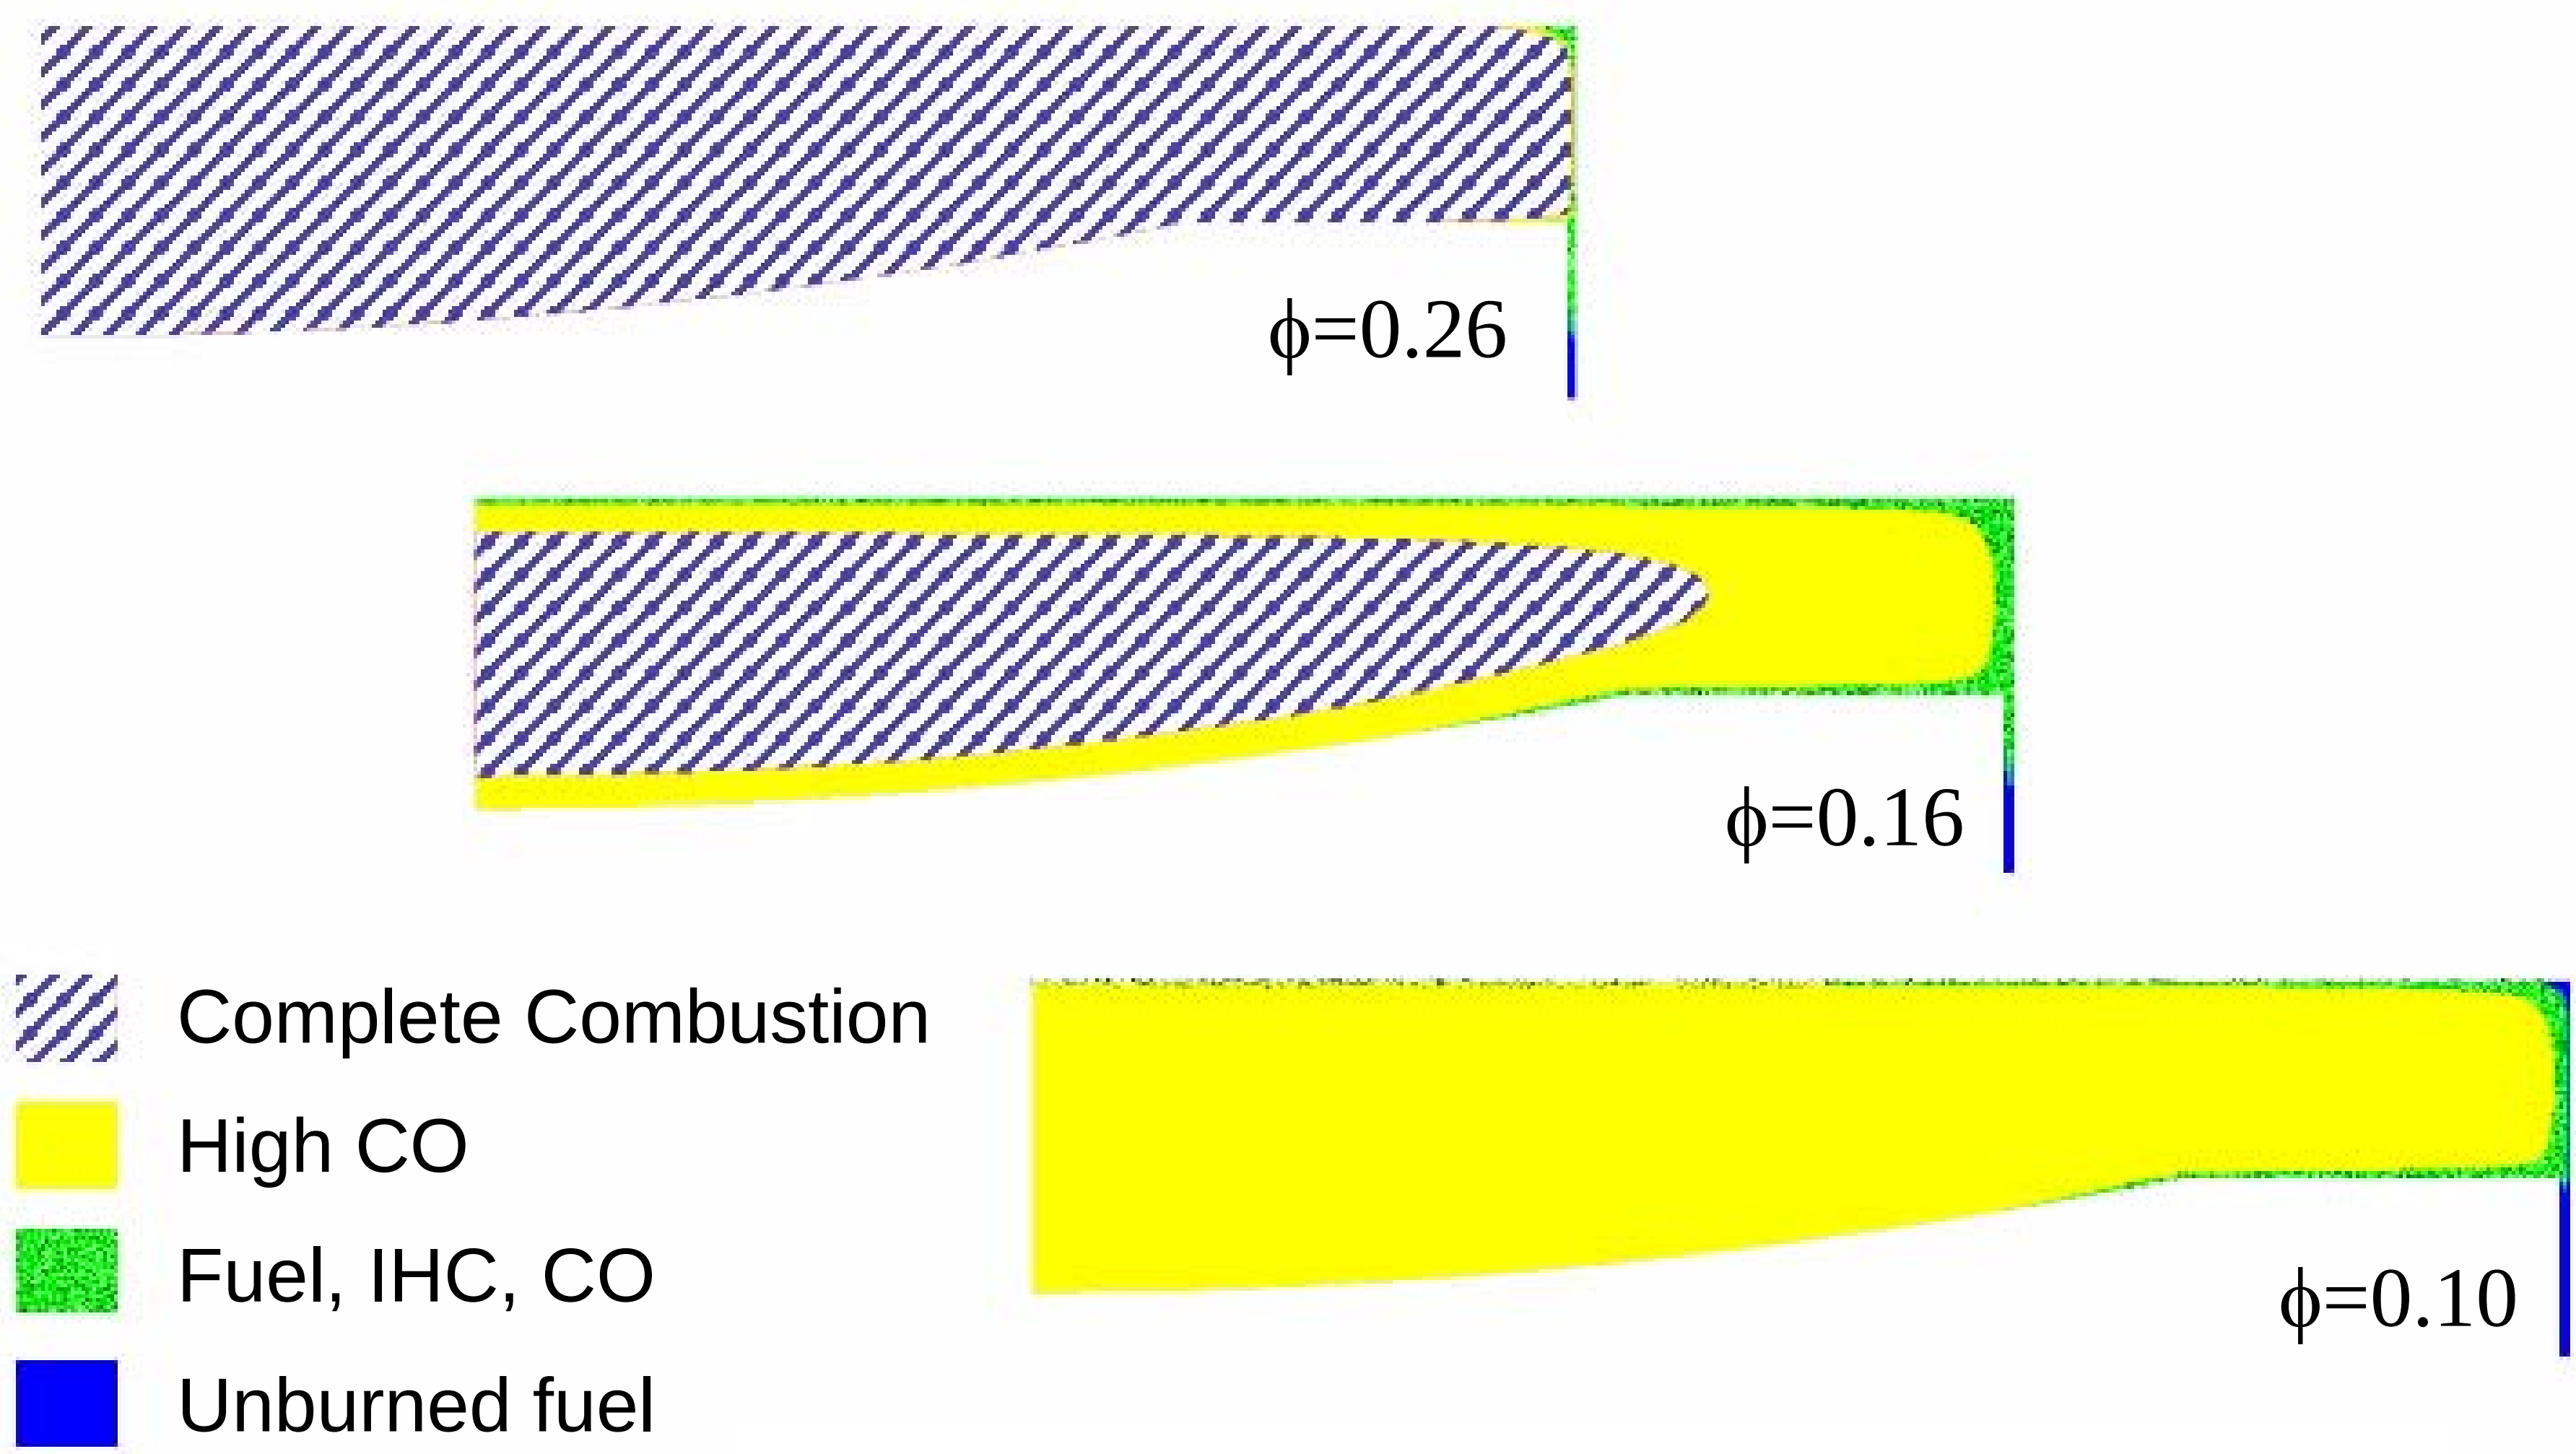

Our multi-zone model gives insight into the reduced combustion efficiency as equivalence ratio decreases

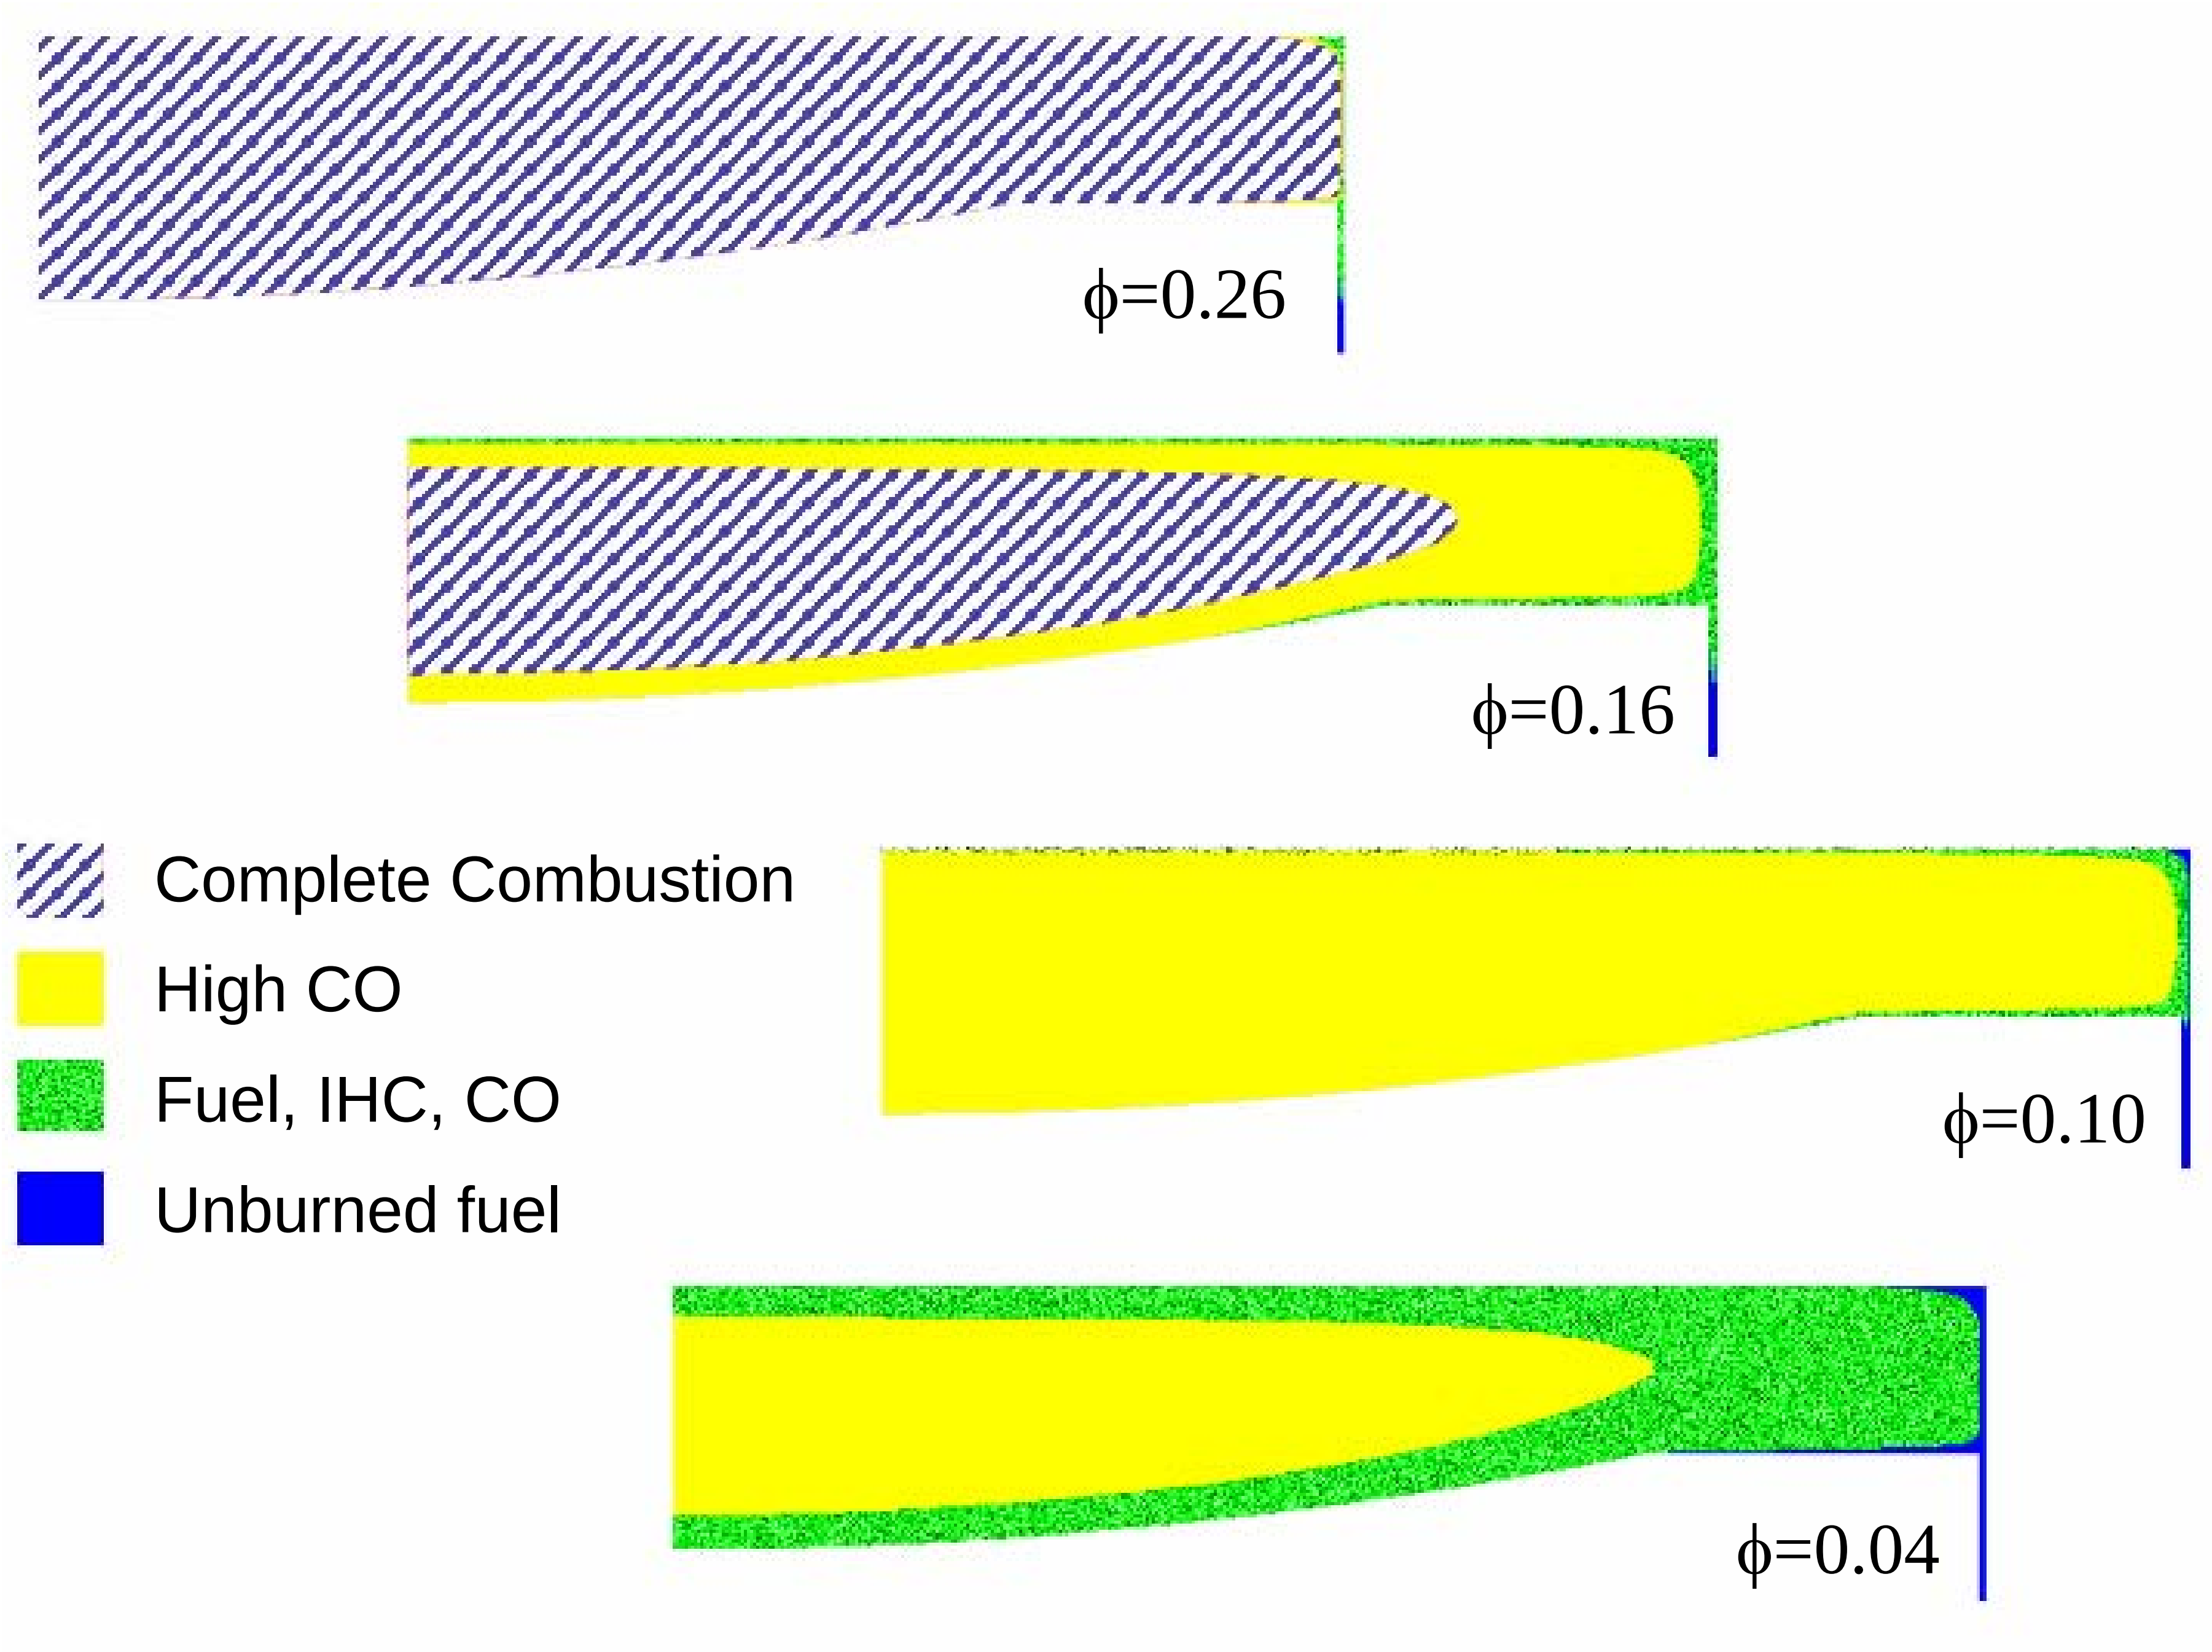

Outline

Through our collaborations we have applied these tools to a wide variety of industrially significant questions:

- What effect does turbulence have on HCCI combustion?
  - Completed study of Lund TD100 engine for low turbulence geometry, now conducting simulations on high turbulence geometry
- What are the low load limits to HCCI operation?
  - Study of HCCI low-load operation limits in Sandia engine
- Does mixing affect CO emissions in HCCI combustion?
  - Extended multi-zone model includes mixing effects – framework for general tool to analyze of HCCI, PCCI, SCCI
  - Analyzed post-combustion mixing and CO formation in HCCI engine

The original design of the multi-zone model is appropriate for modeling truly homogeneous HCCI combustion

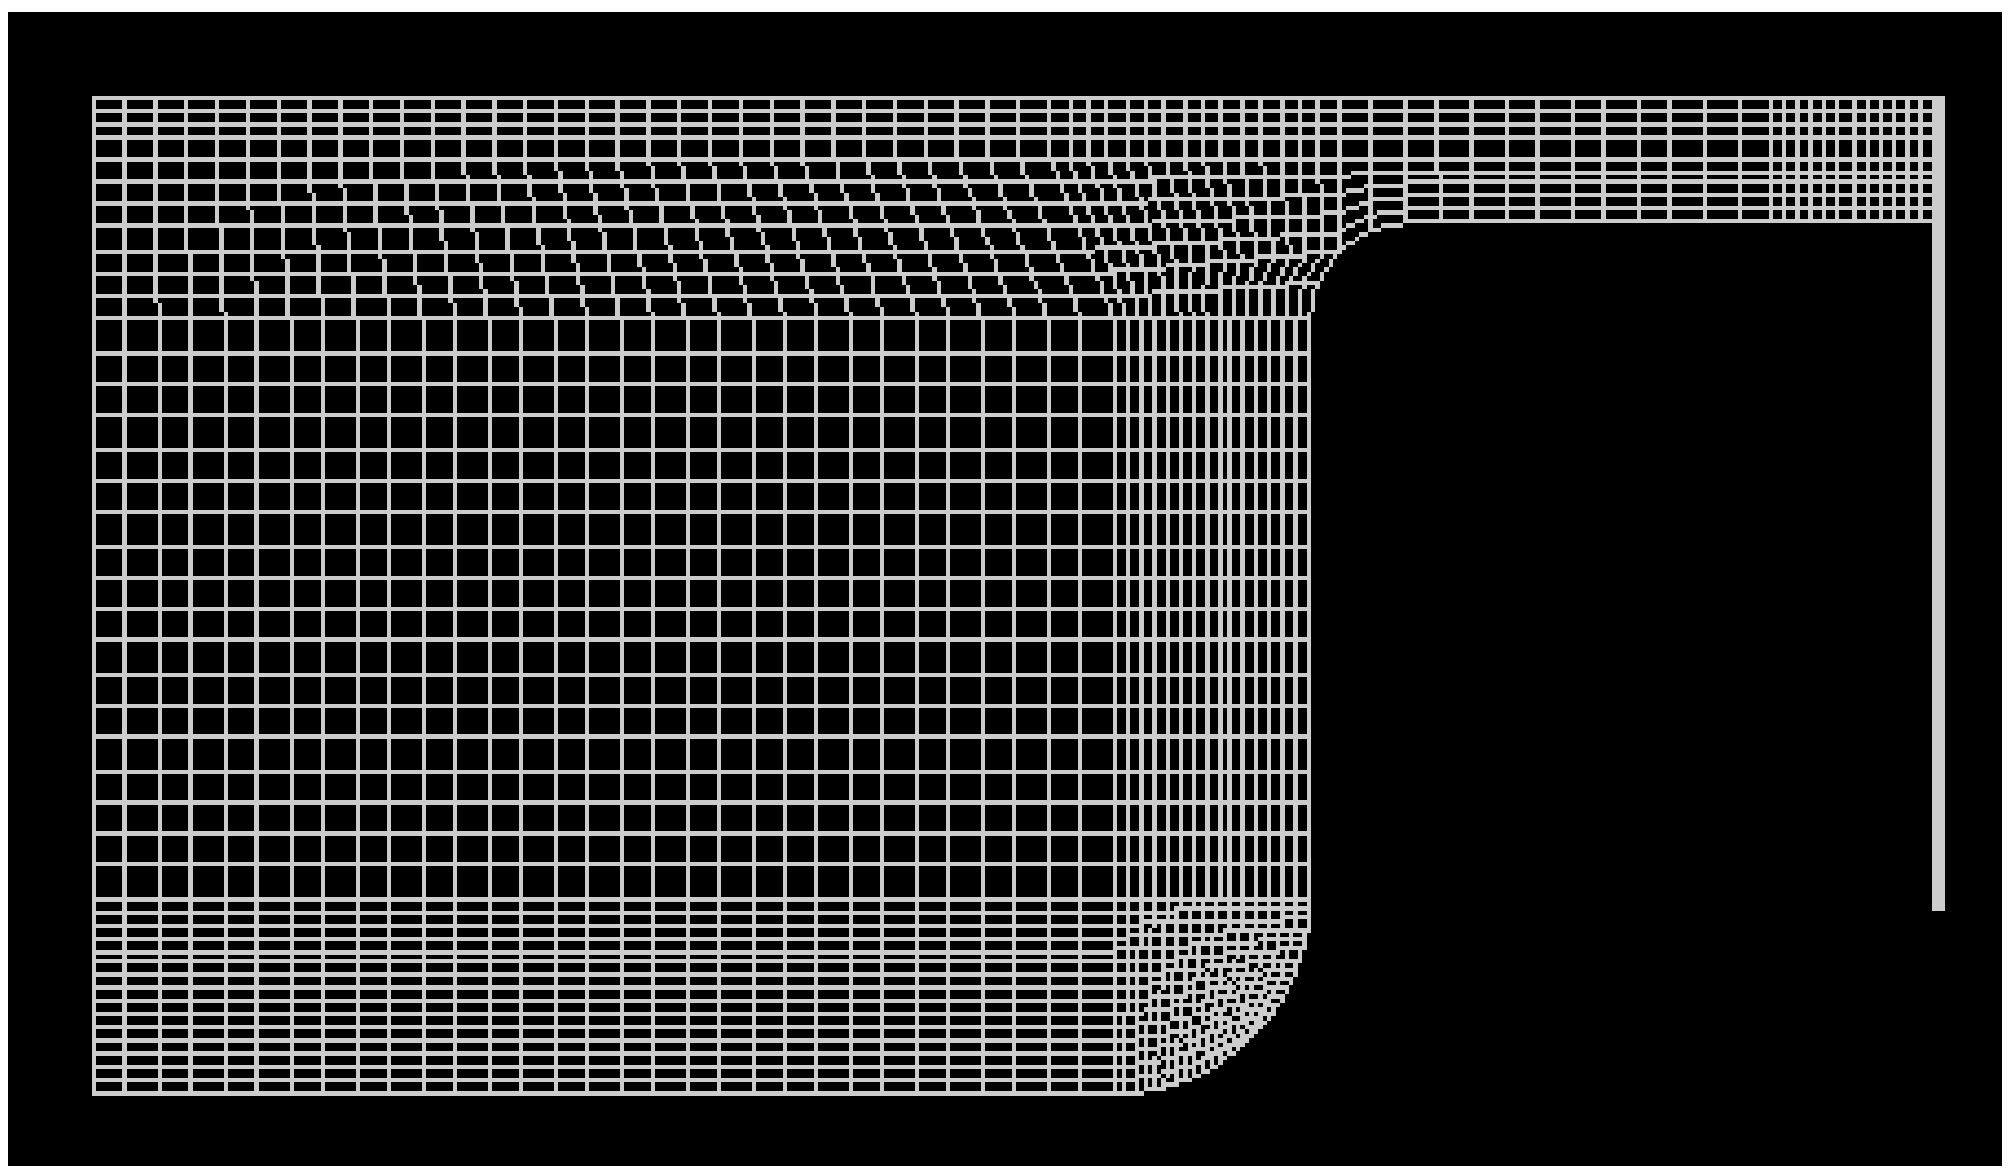

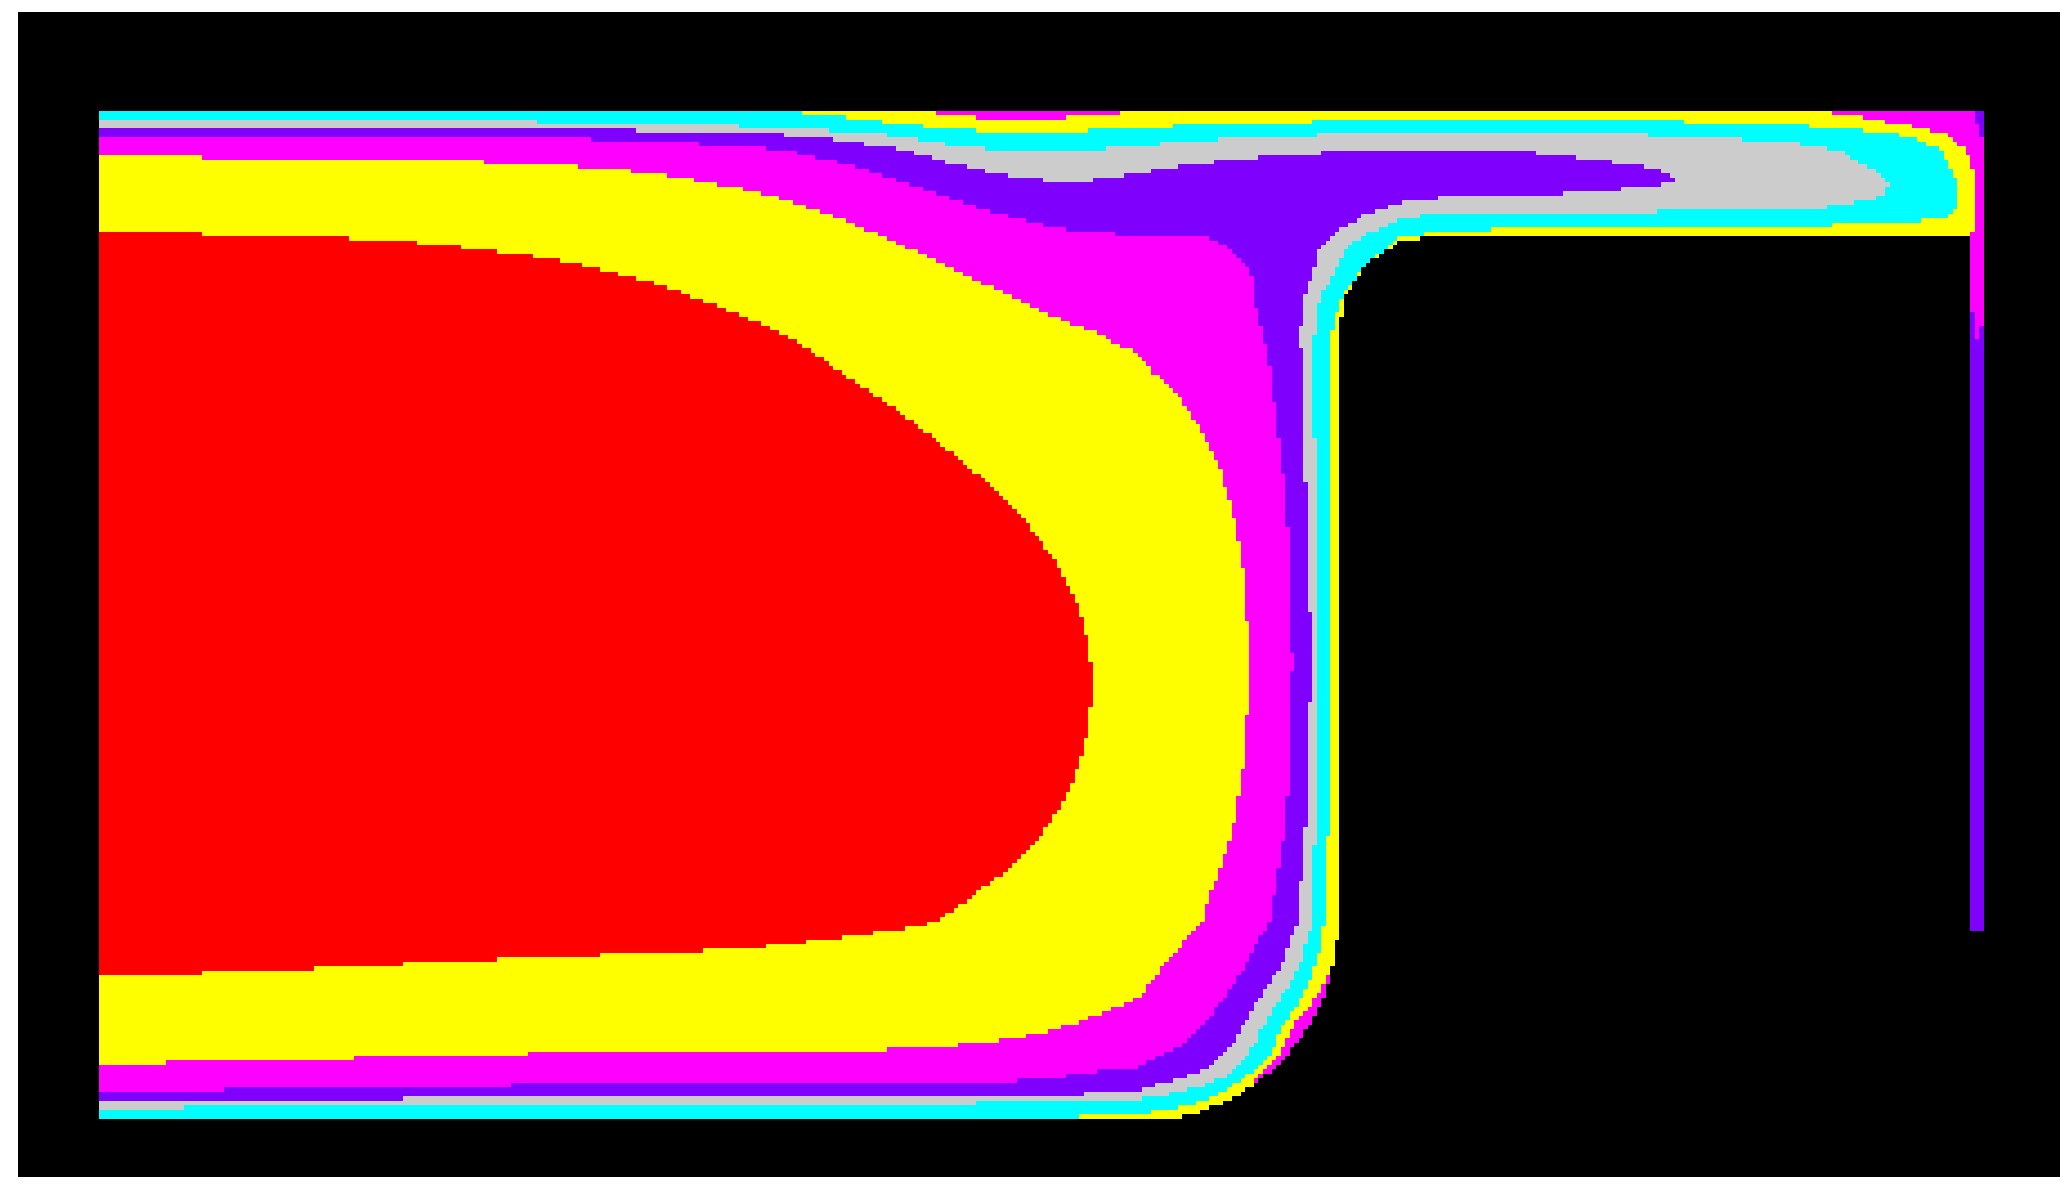

Original Multi-zone Model:
One-way mapping from Kiva to Kinetic Solver

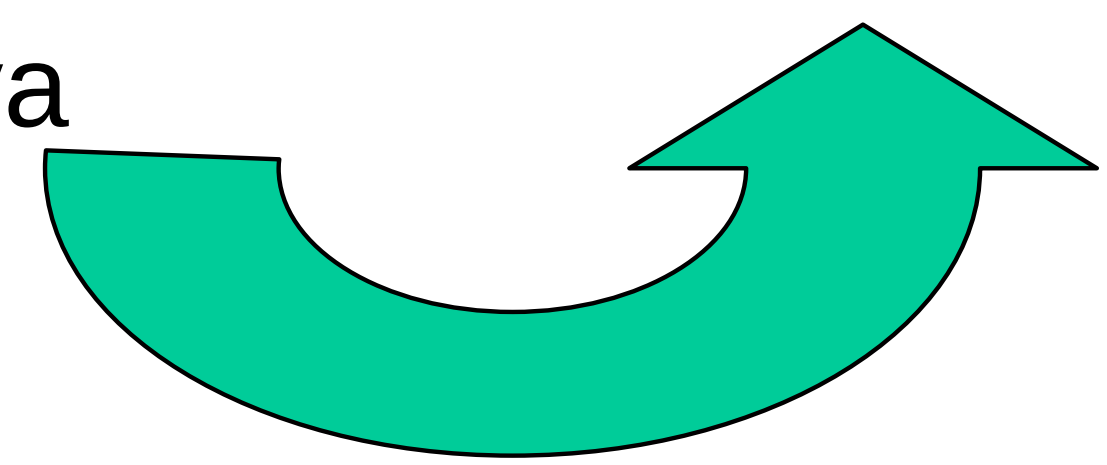

Enhancement to multi-zone model gives us the capability to handle stratified combustion (PCCI, SCCI)

Enhanced Model:
Kinetic solver results are mapped back onto Kiva Grid

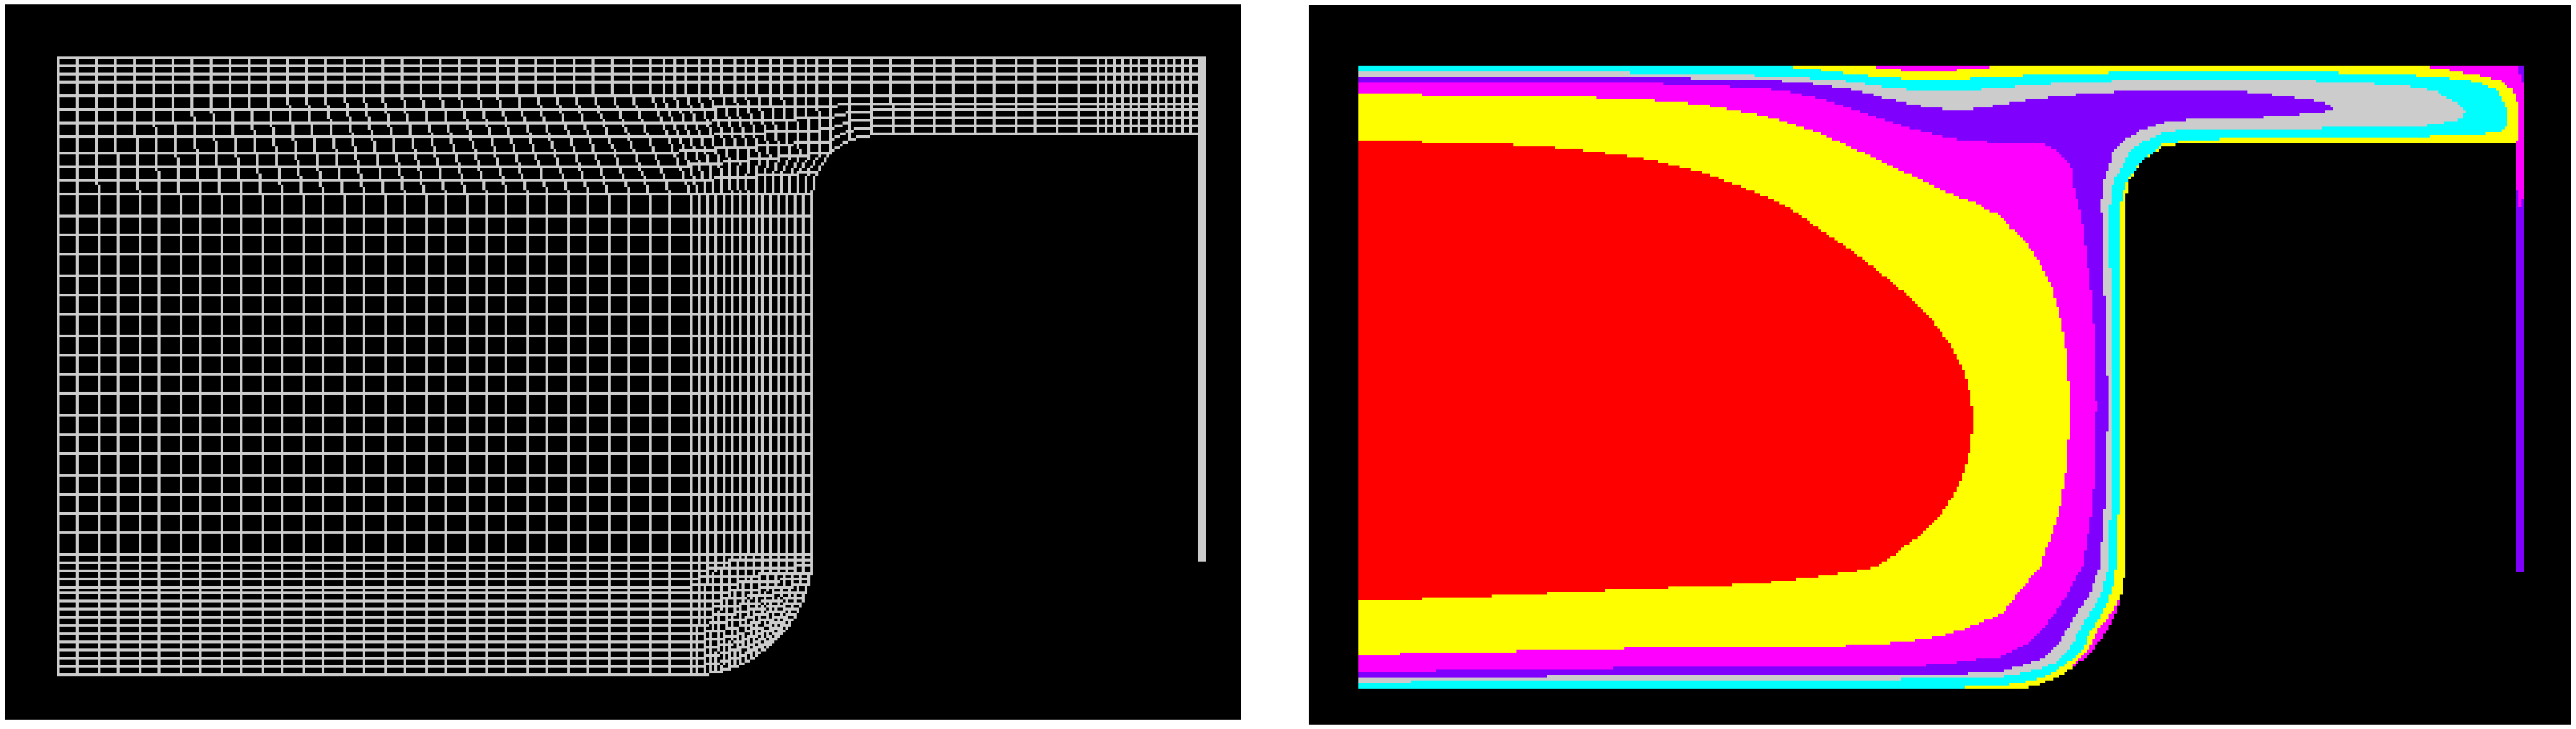

Kiva can now be used to account for mixing and heat transfer between zones for the whole cycle

The enhancements in the model allow us to move beyond “truly homogeneous” HCCI combustion

- Model is generally applicable to cases where heat release and mixing are weakly coupled
  - – PCCI = Premixed Charge Compression Ignition
    - High Internal EGR
  - – SCCI = Stratified Charge compression Ignition
    - Early Direct Injection

Accounting for mixing in multi-zone model yields much improved CO and HC emissions (SAE 2003-01-1821)

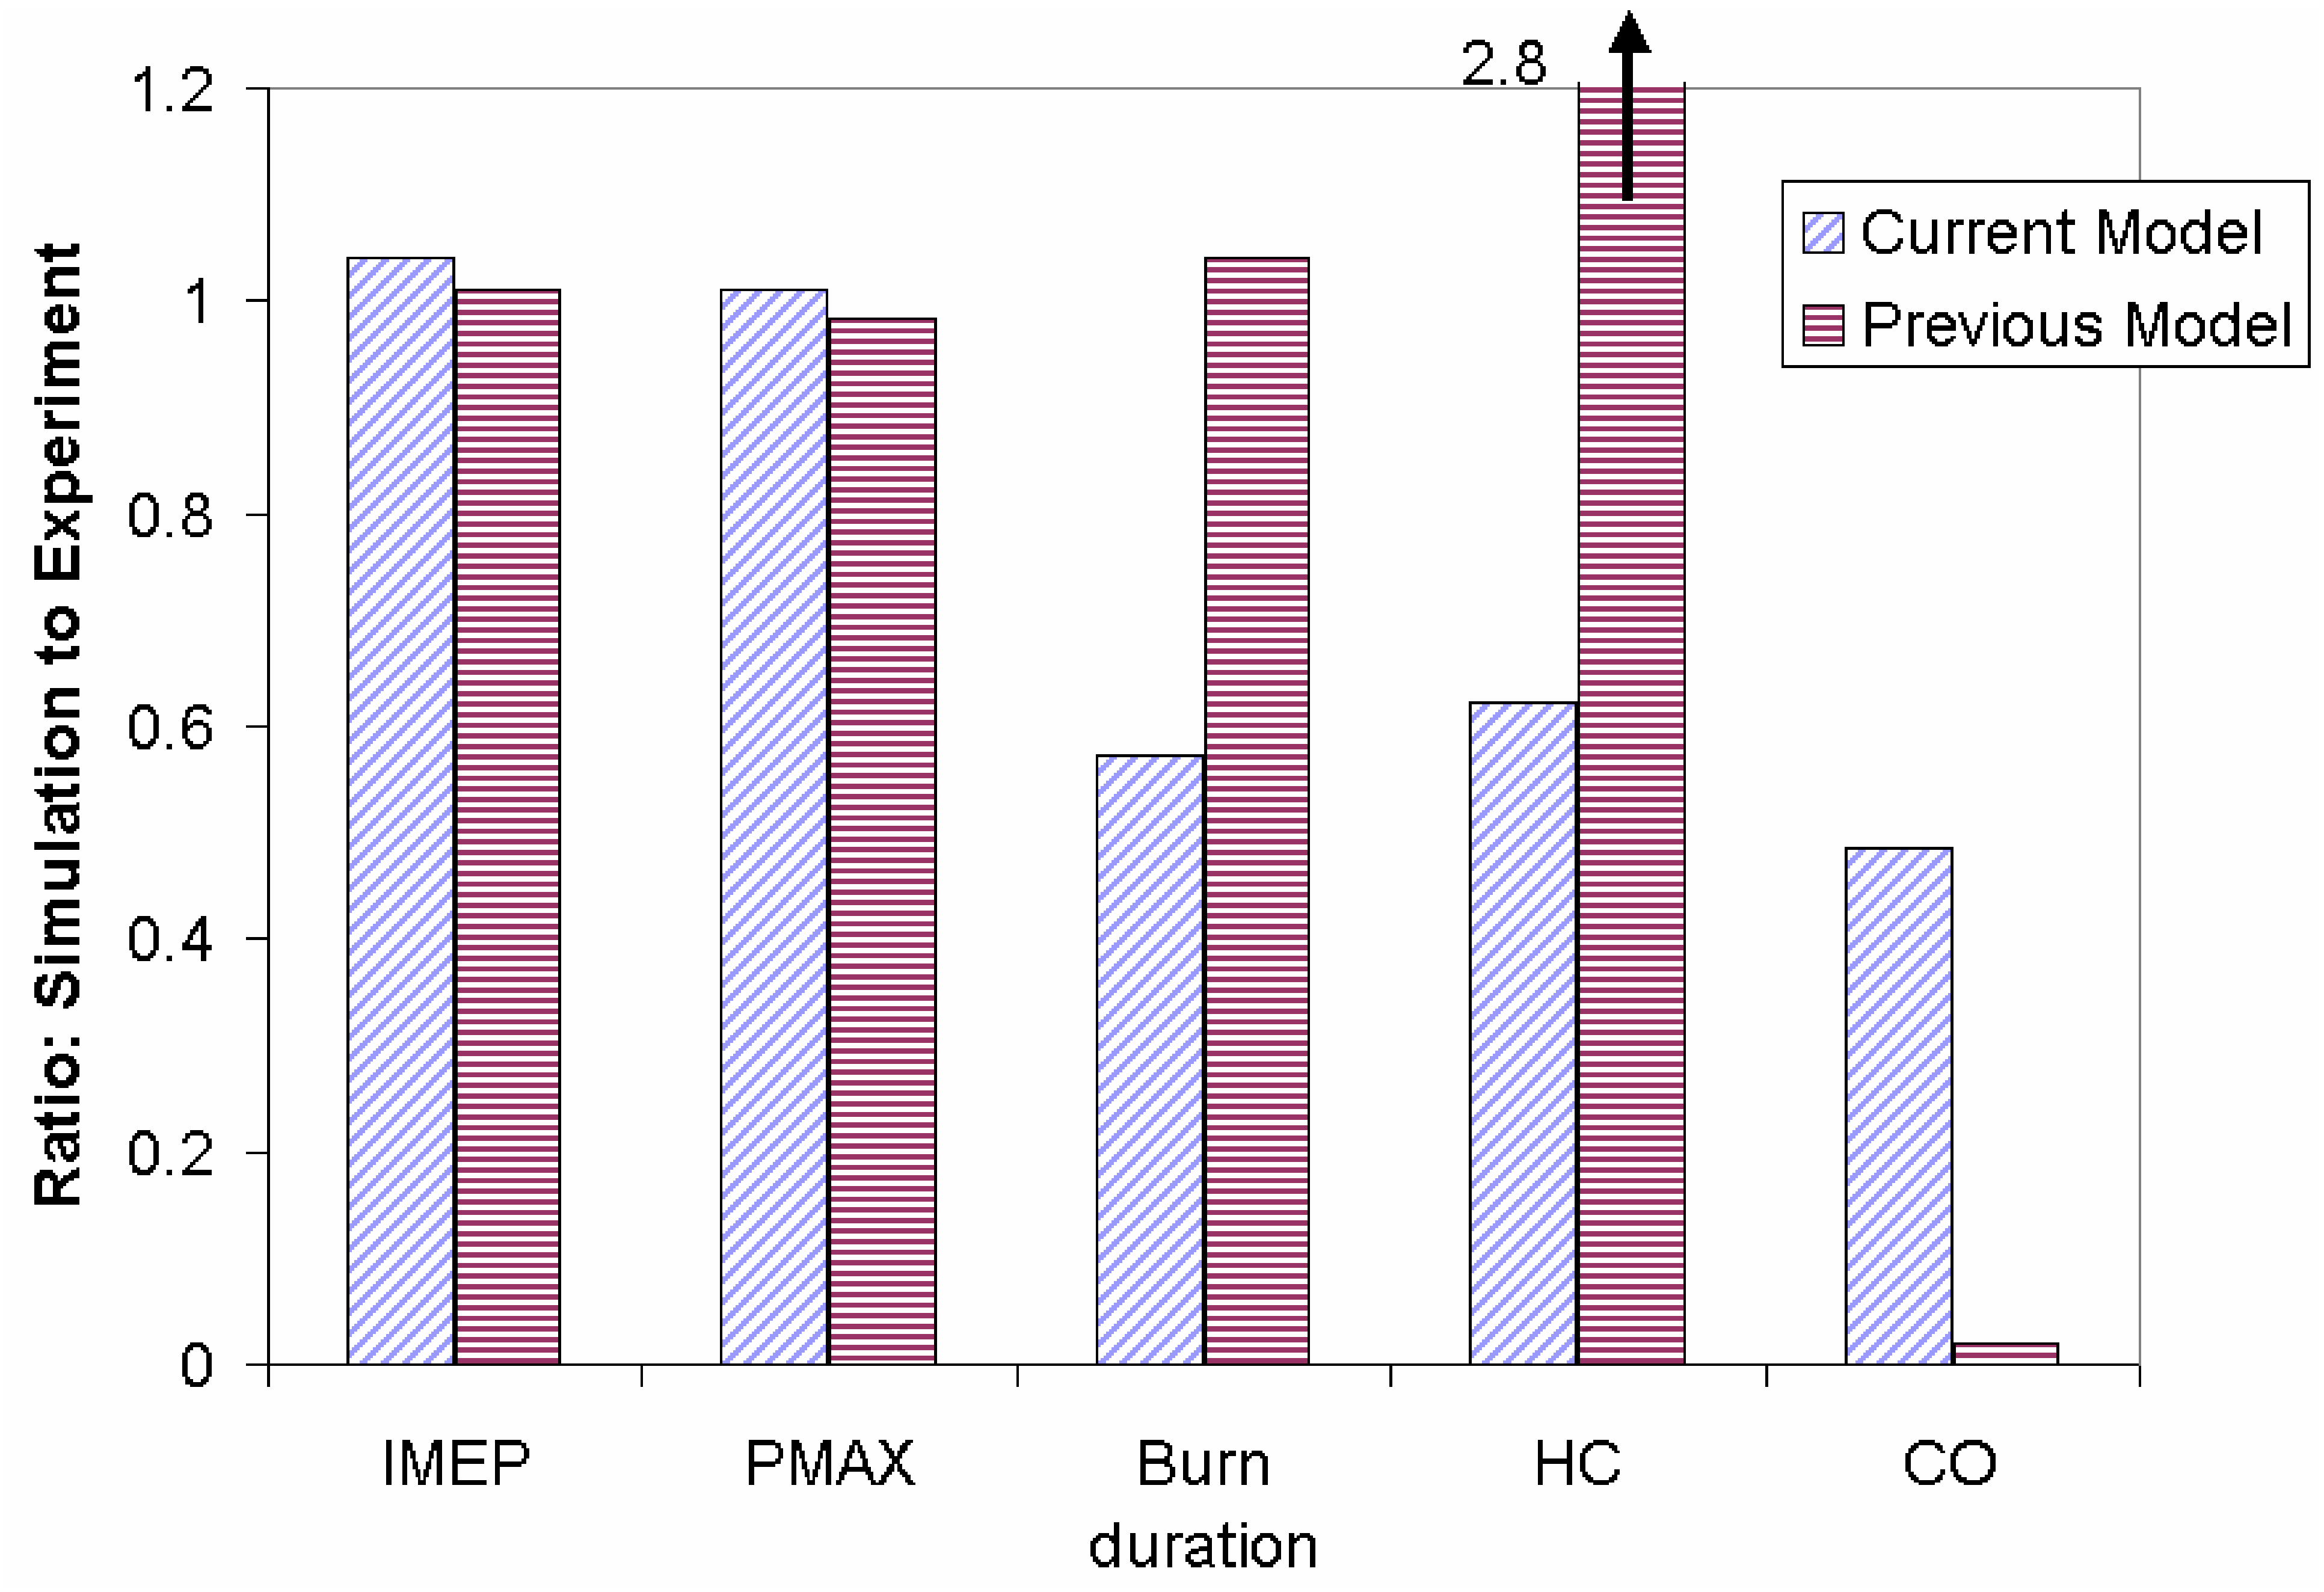

Experimental work

- What control methods are viable for multi-cylinder HCCI engines?
  - Designed and tested a generic control system for internal EGR control of cylinder by cylinder variation in 4-cylinder engine
  - Implementing closed loop feedback control for cylinder-by-cylinder phase balancing

Controlling cylinder-by-cylinder combustion timing is very important for multi-cylinder HCCI engines

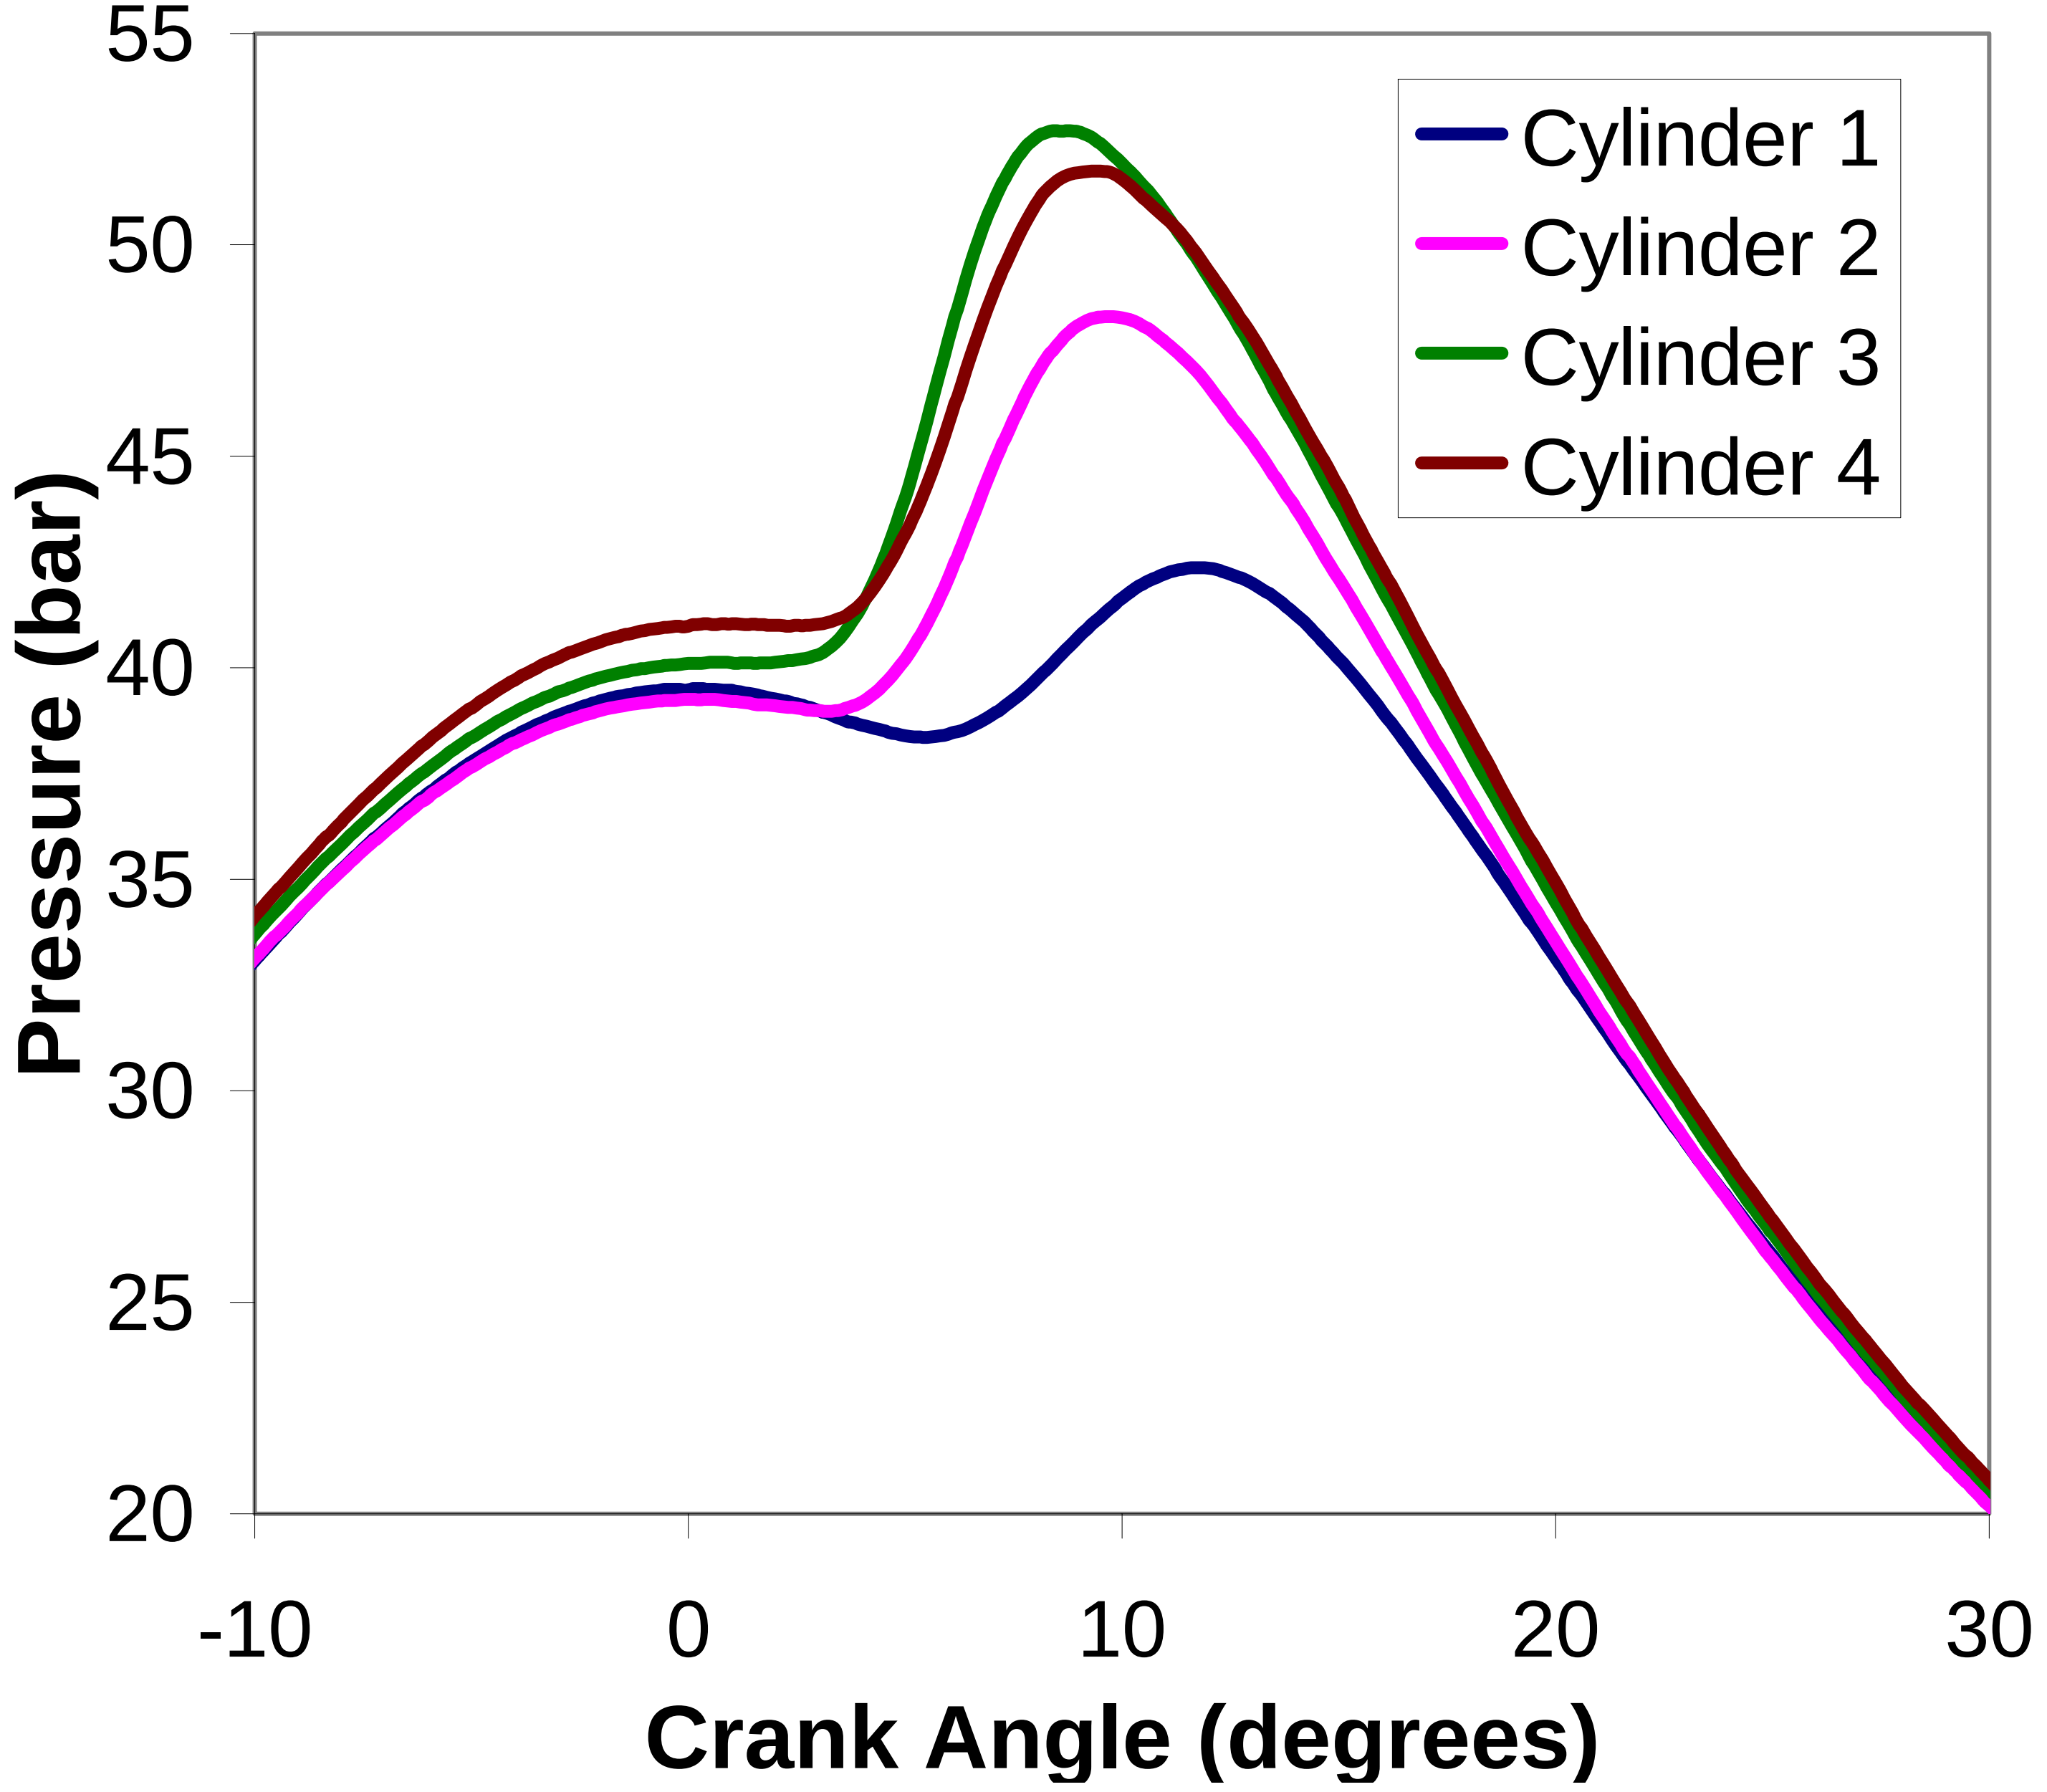

A generic, low cost surrogate to variable valve timing is being used for controlling cylinder to cylinder variations

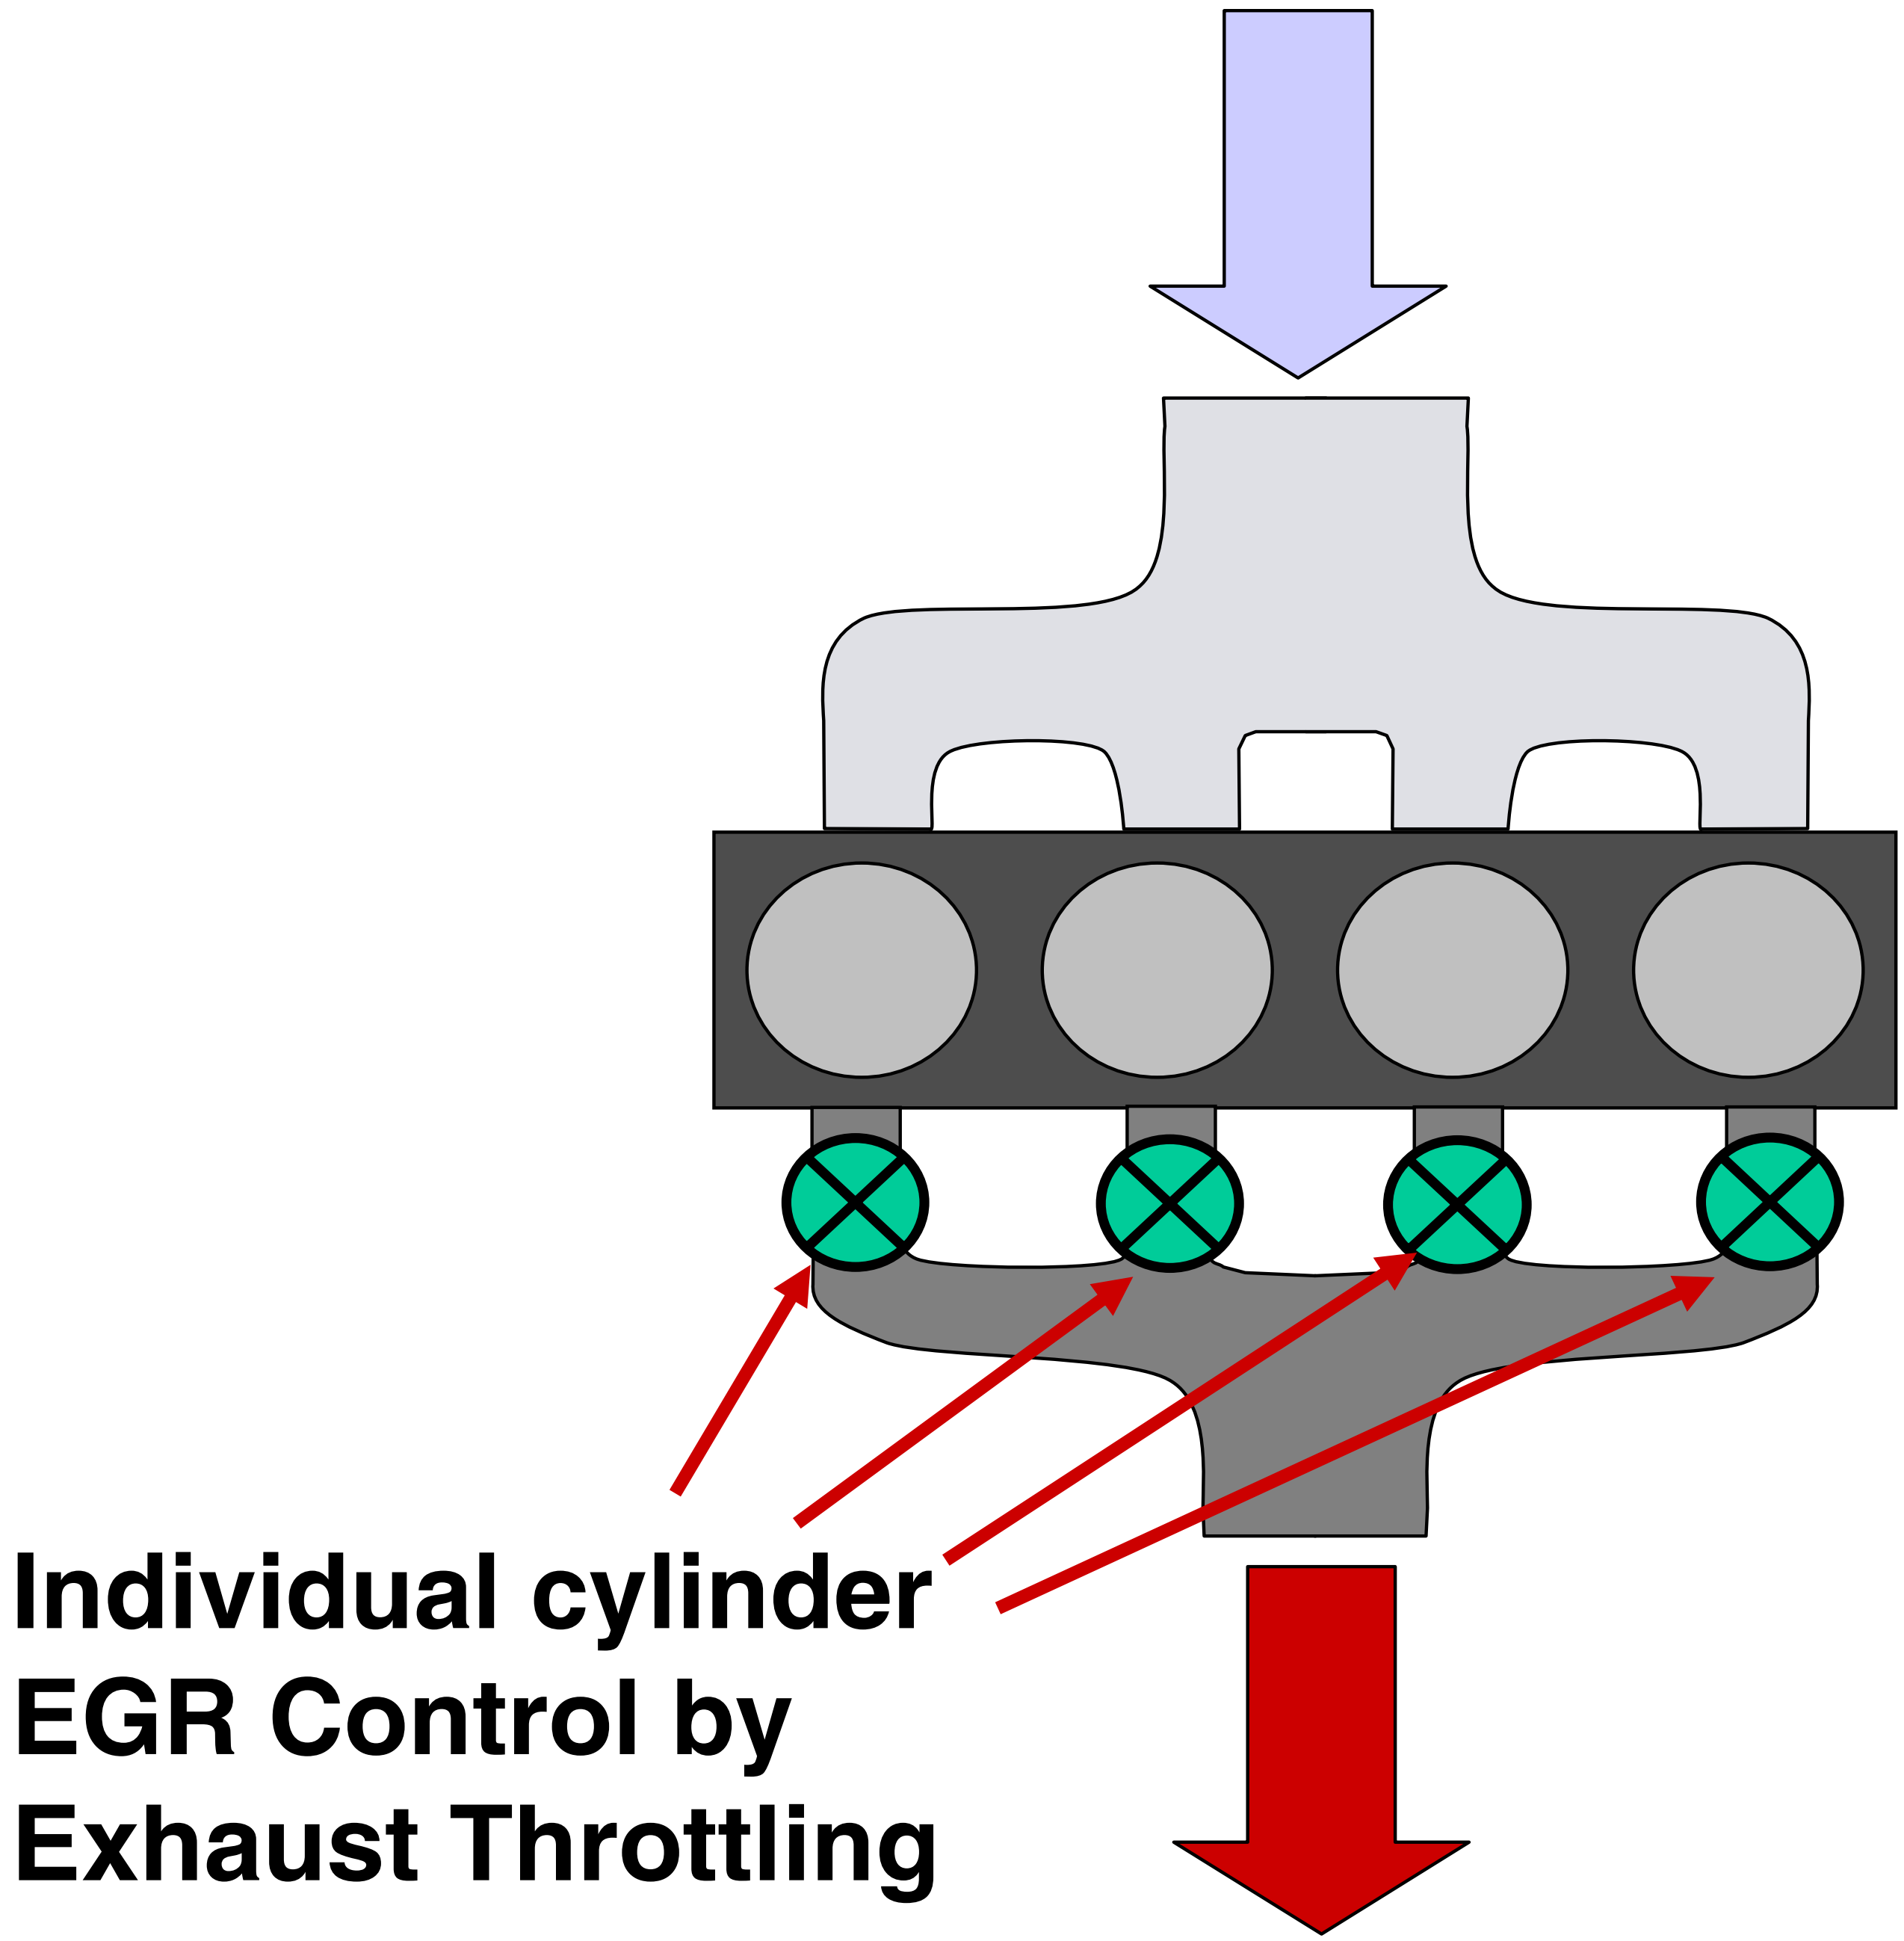

Surprising Exhaust Throttle Effects on start of combustion (SOC)

1. SOC delayed by backpressure of cylinder !
2. Constant fuel flow intake (non injected), and naturally aspirated air intake may explain SOC retardation.

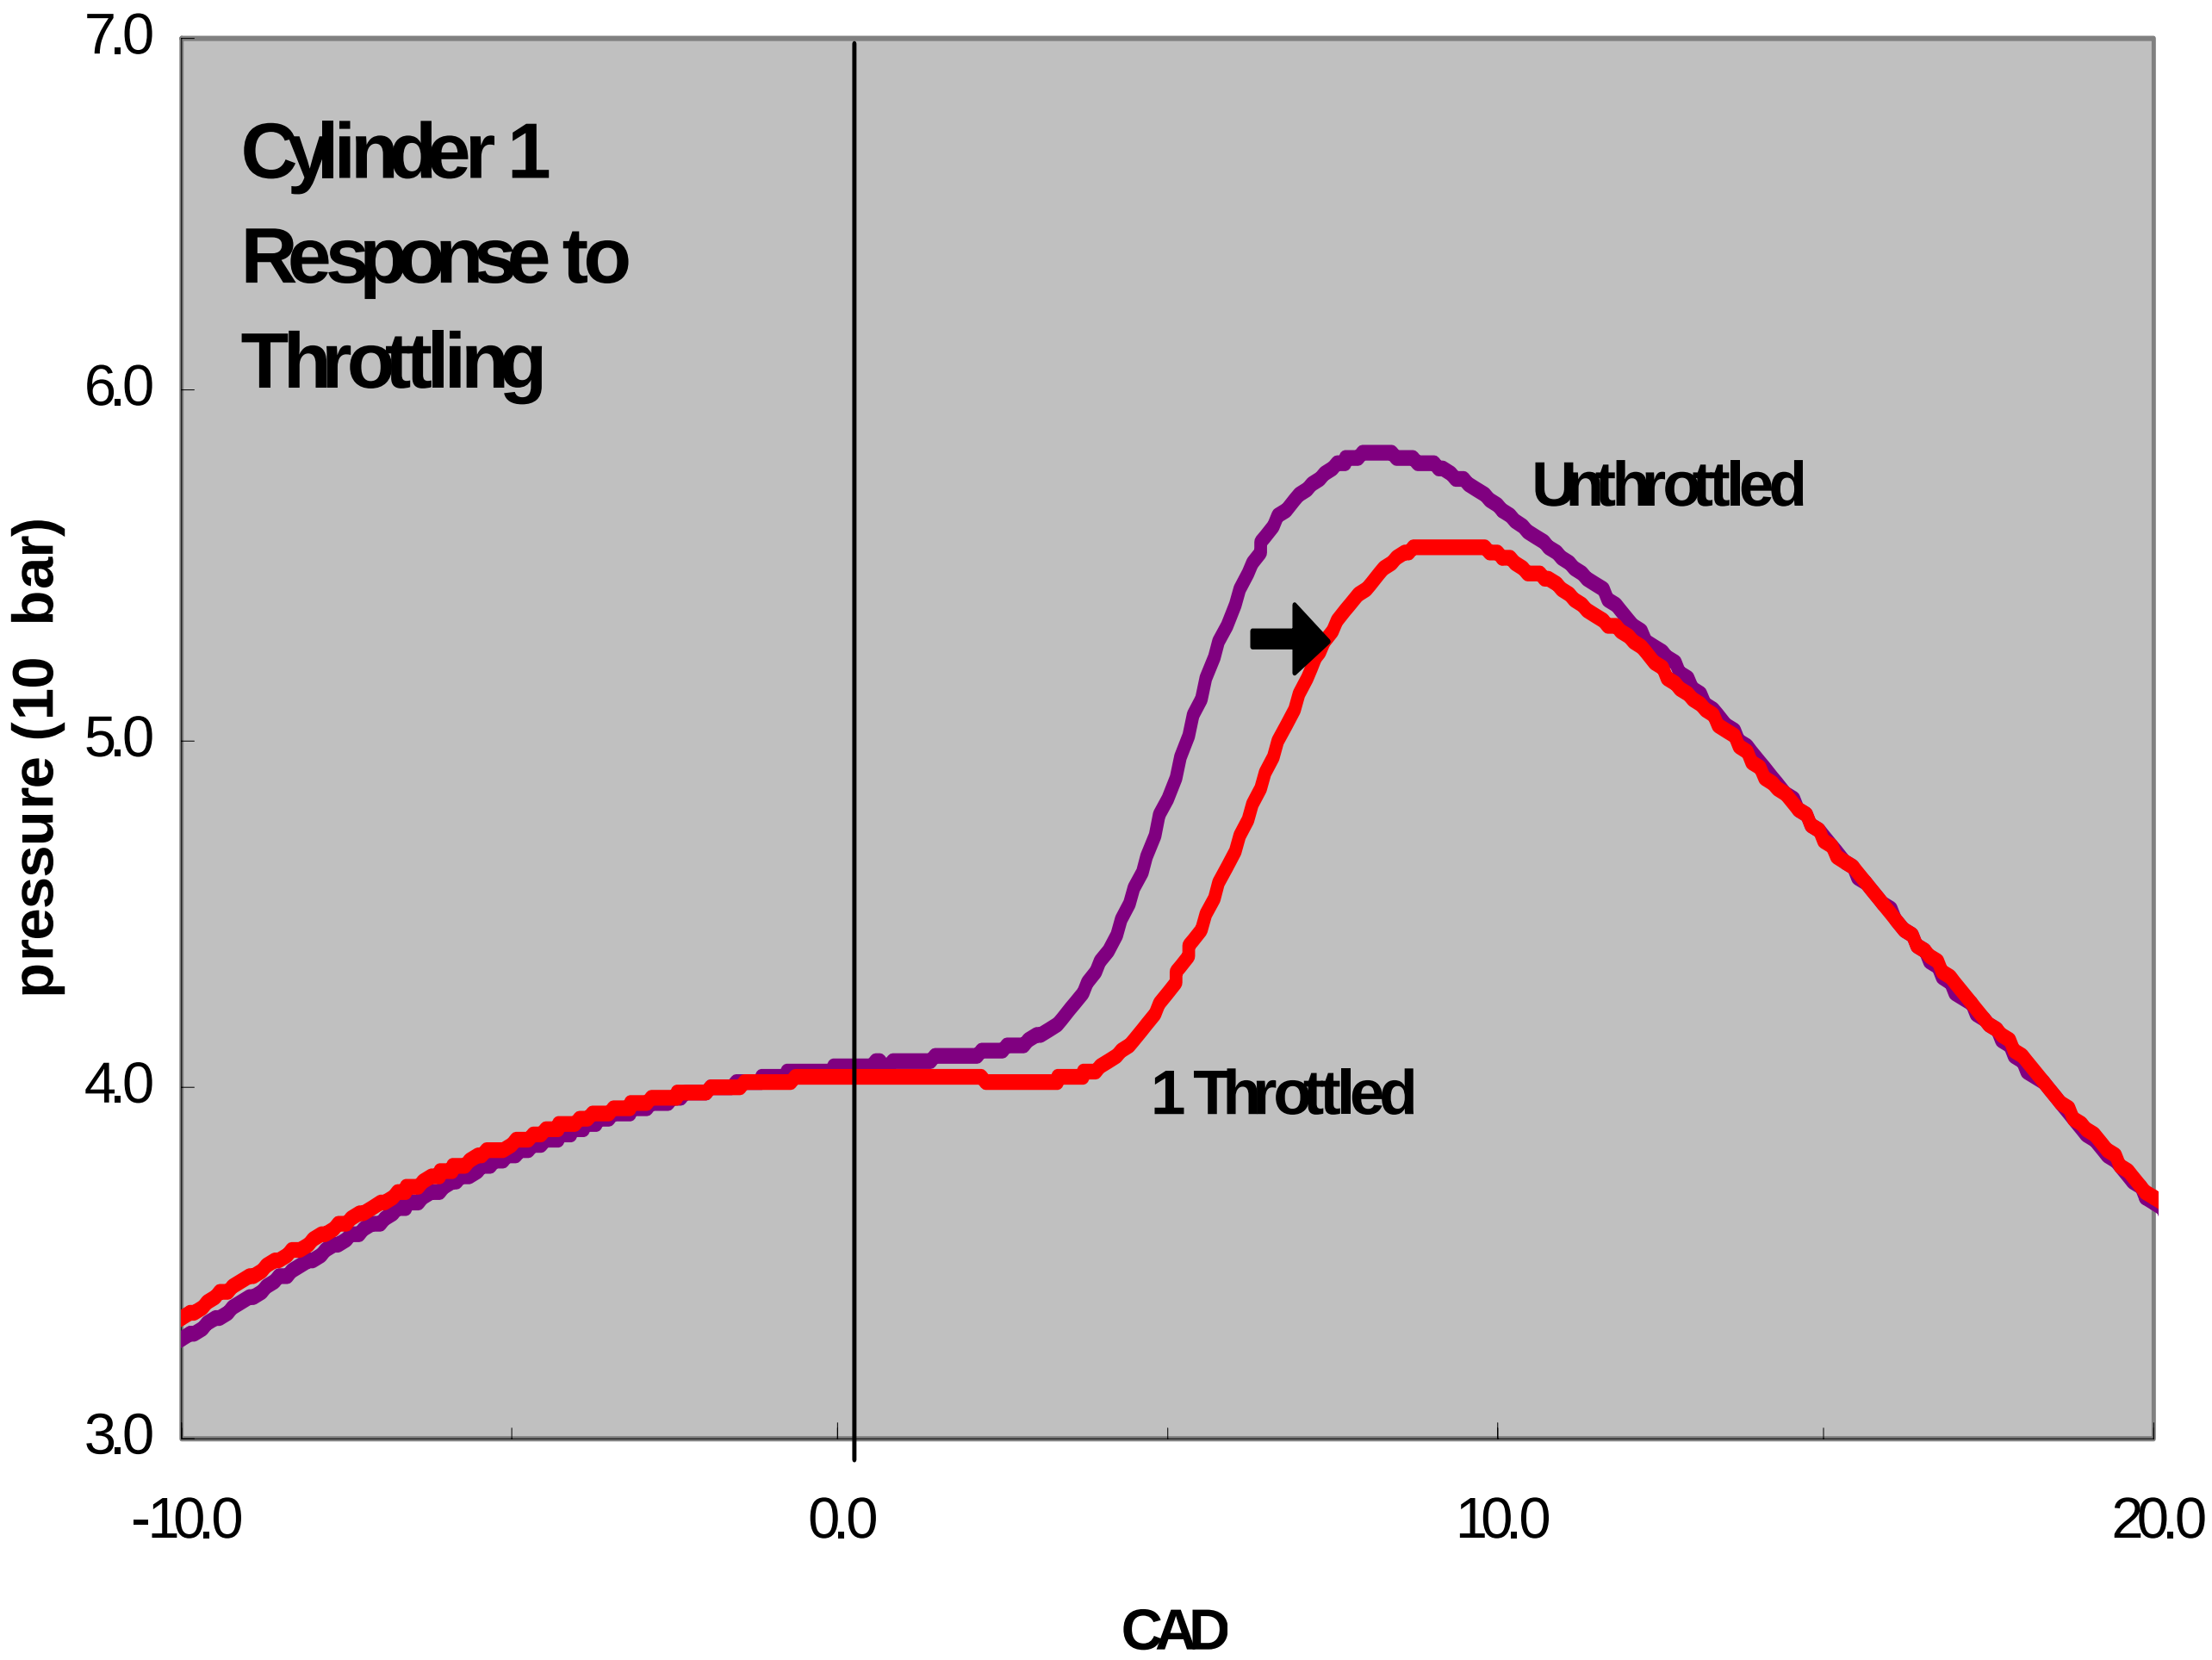

Surprising Exhaust Throttle Effects on SOC

Amazingly, throttling of other cylinders advances SOC of cylinder 1 !?!

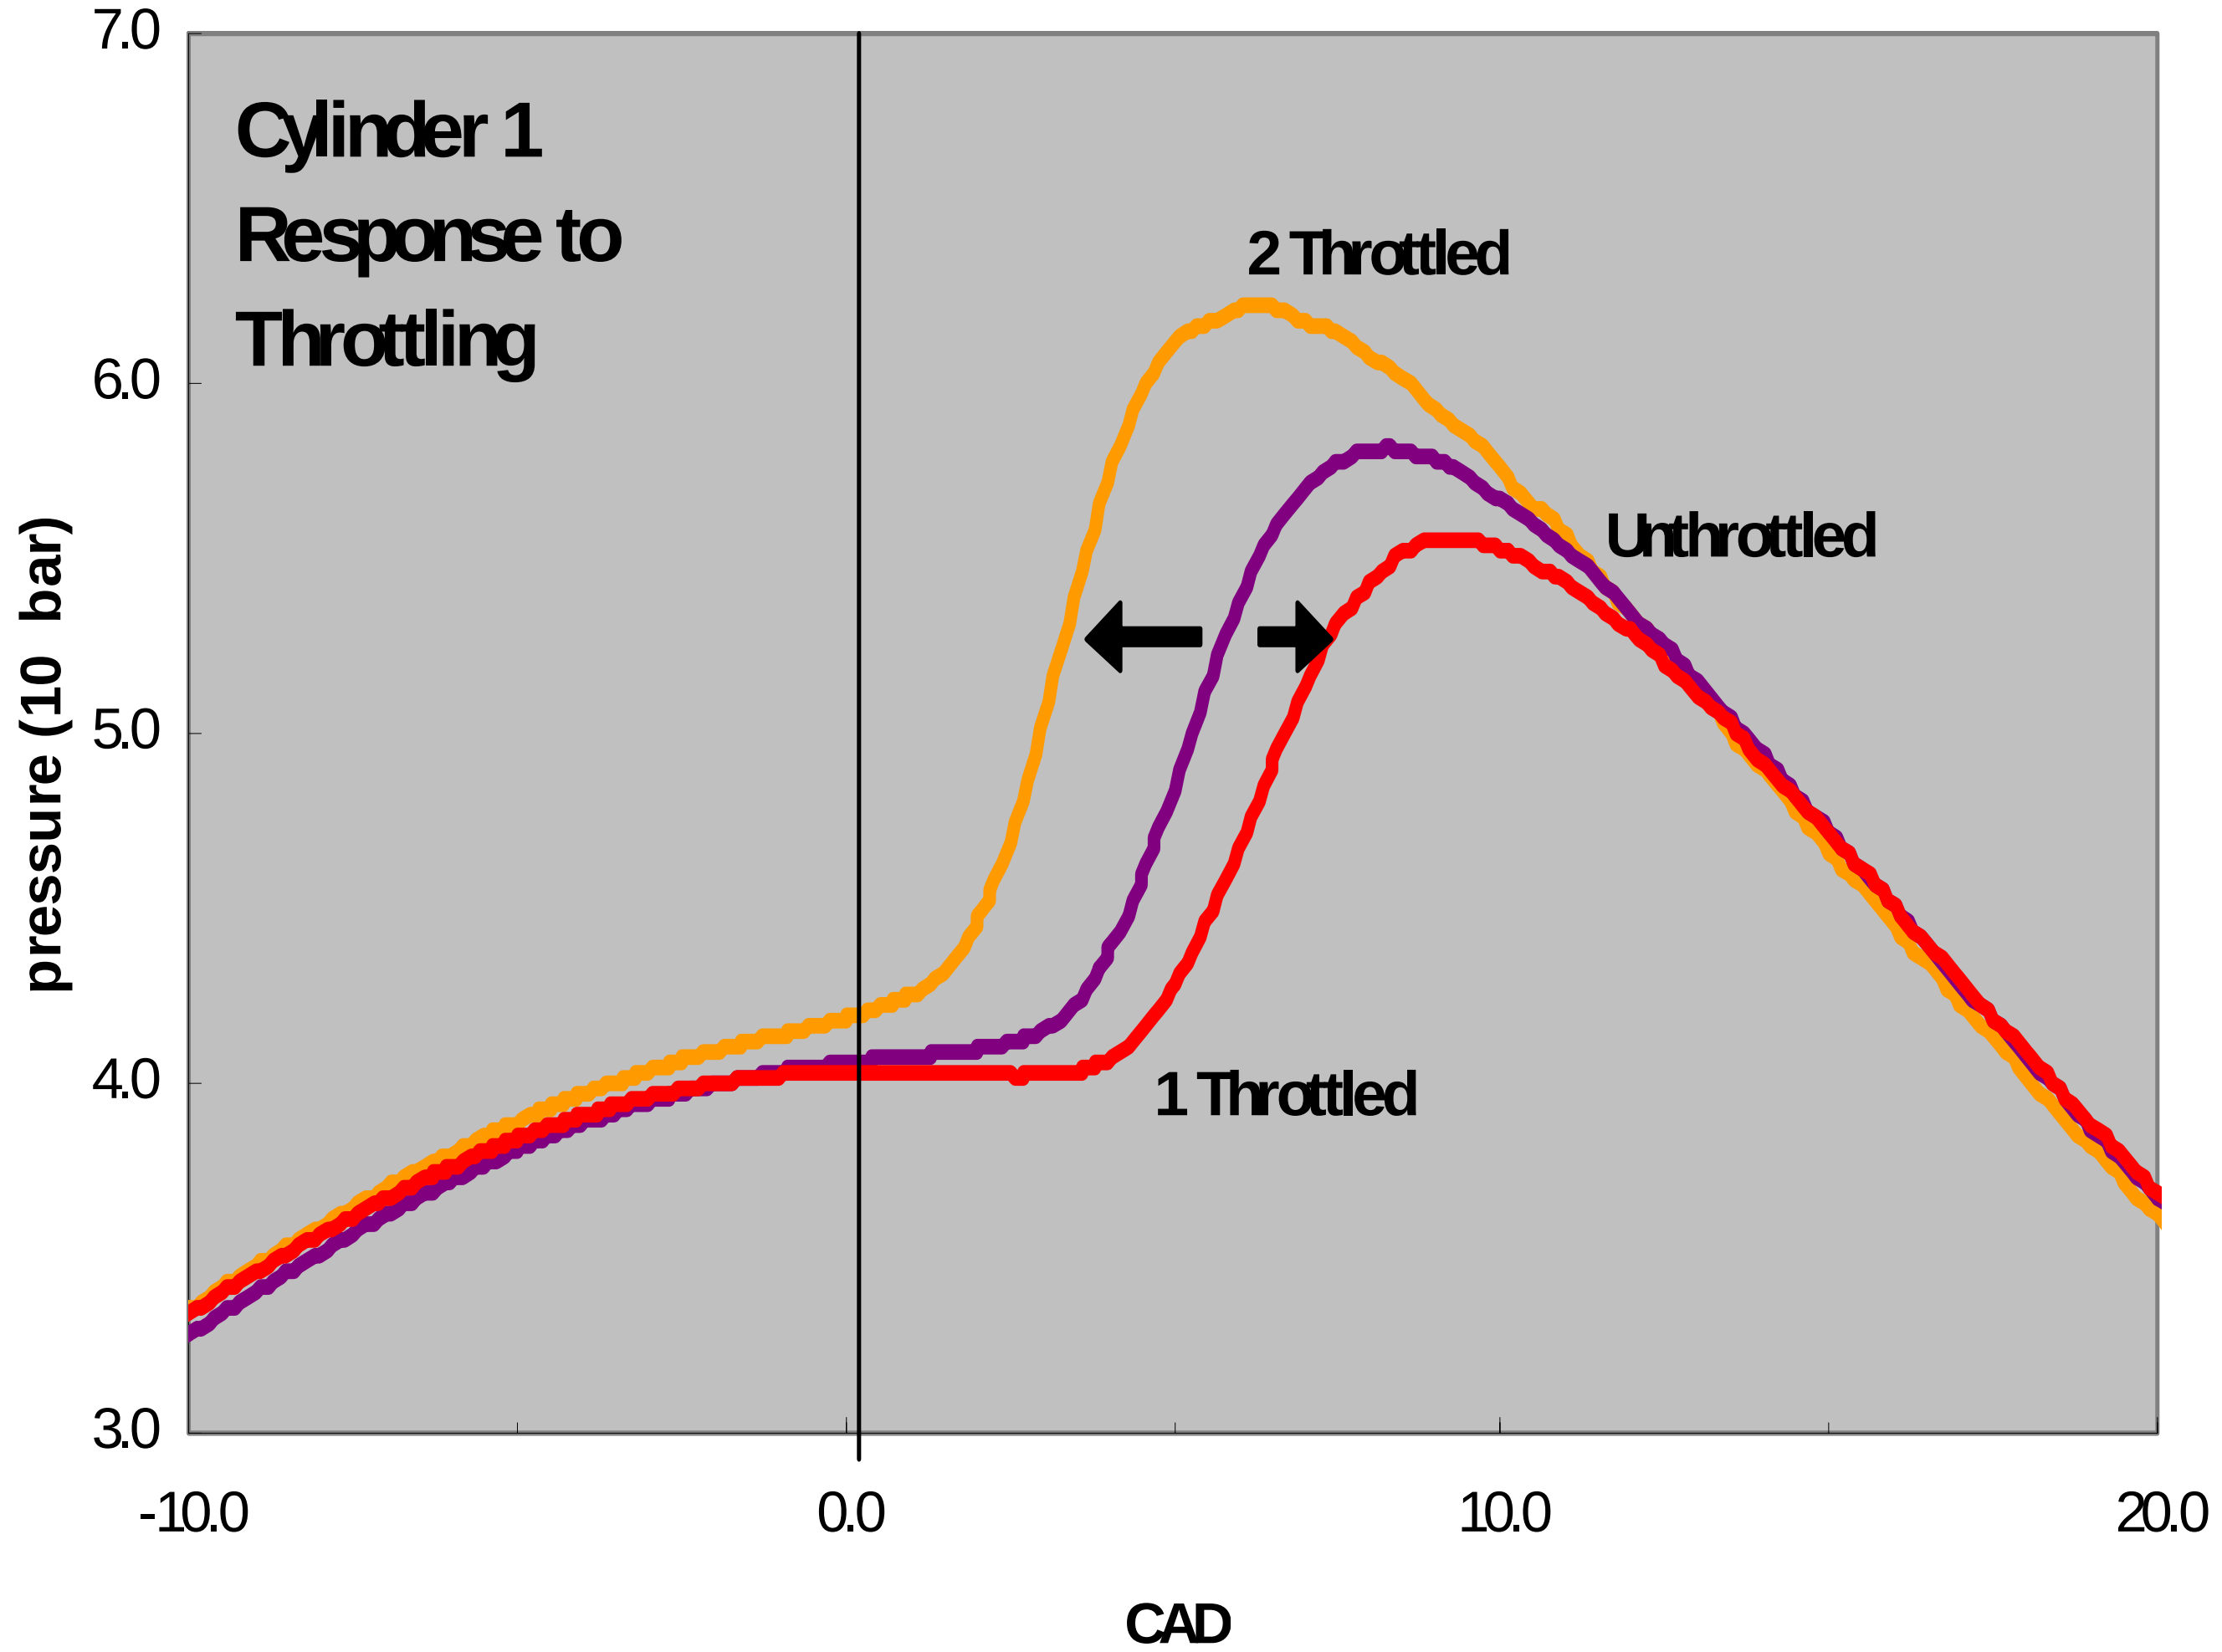

Any Exhaust Throttle affects SOC in Cylinder 1

Backpressure of cylinders 3 and 4 also increases the SOC in cylinder 1

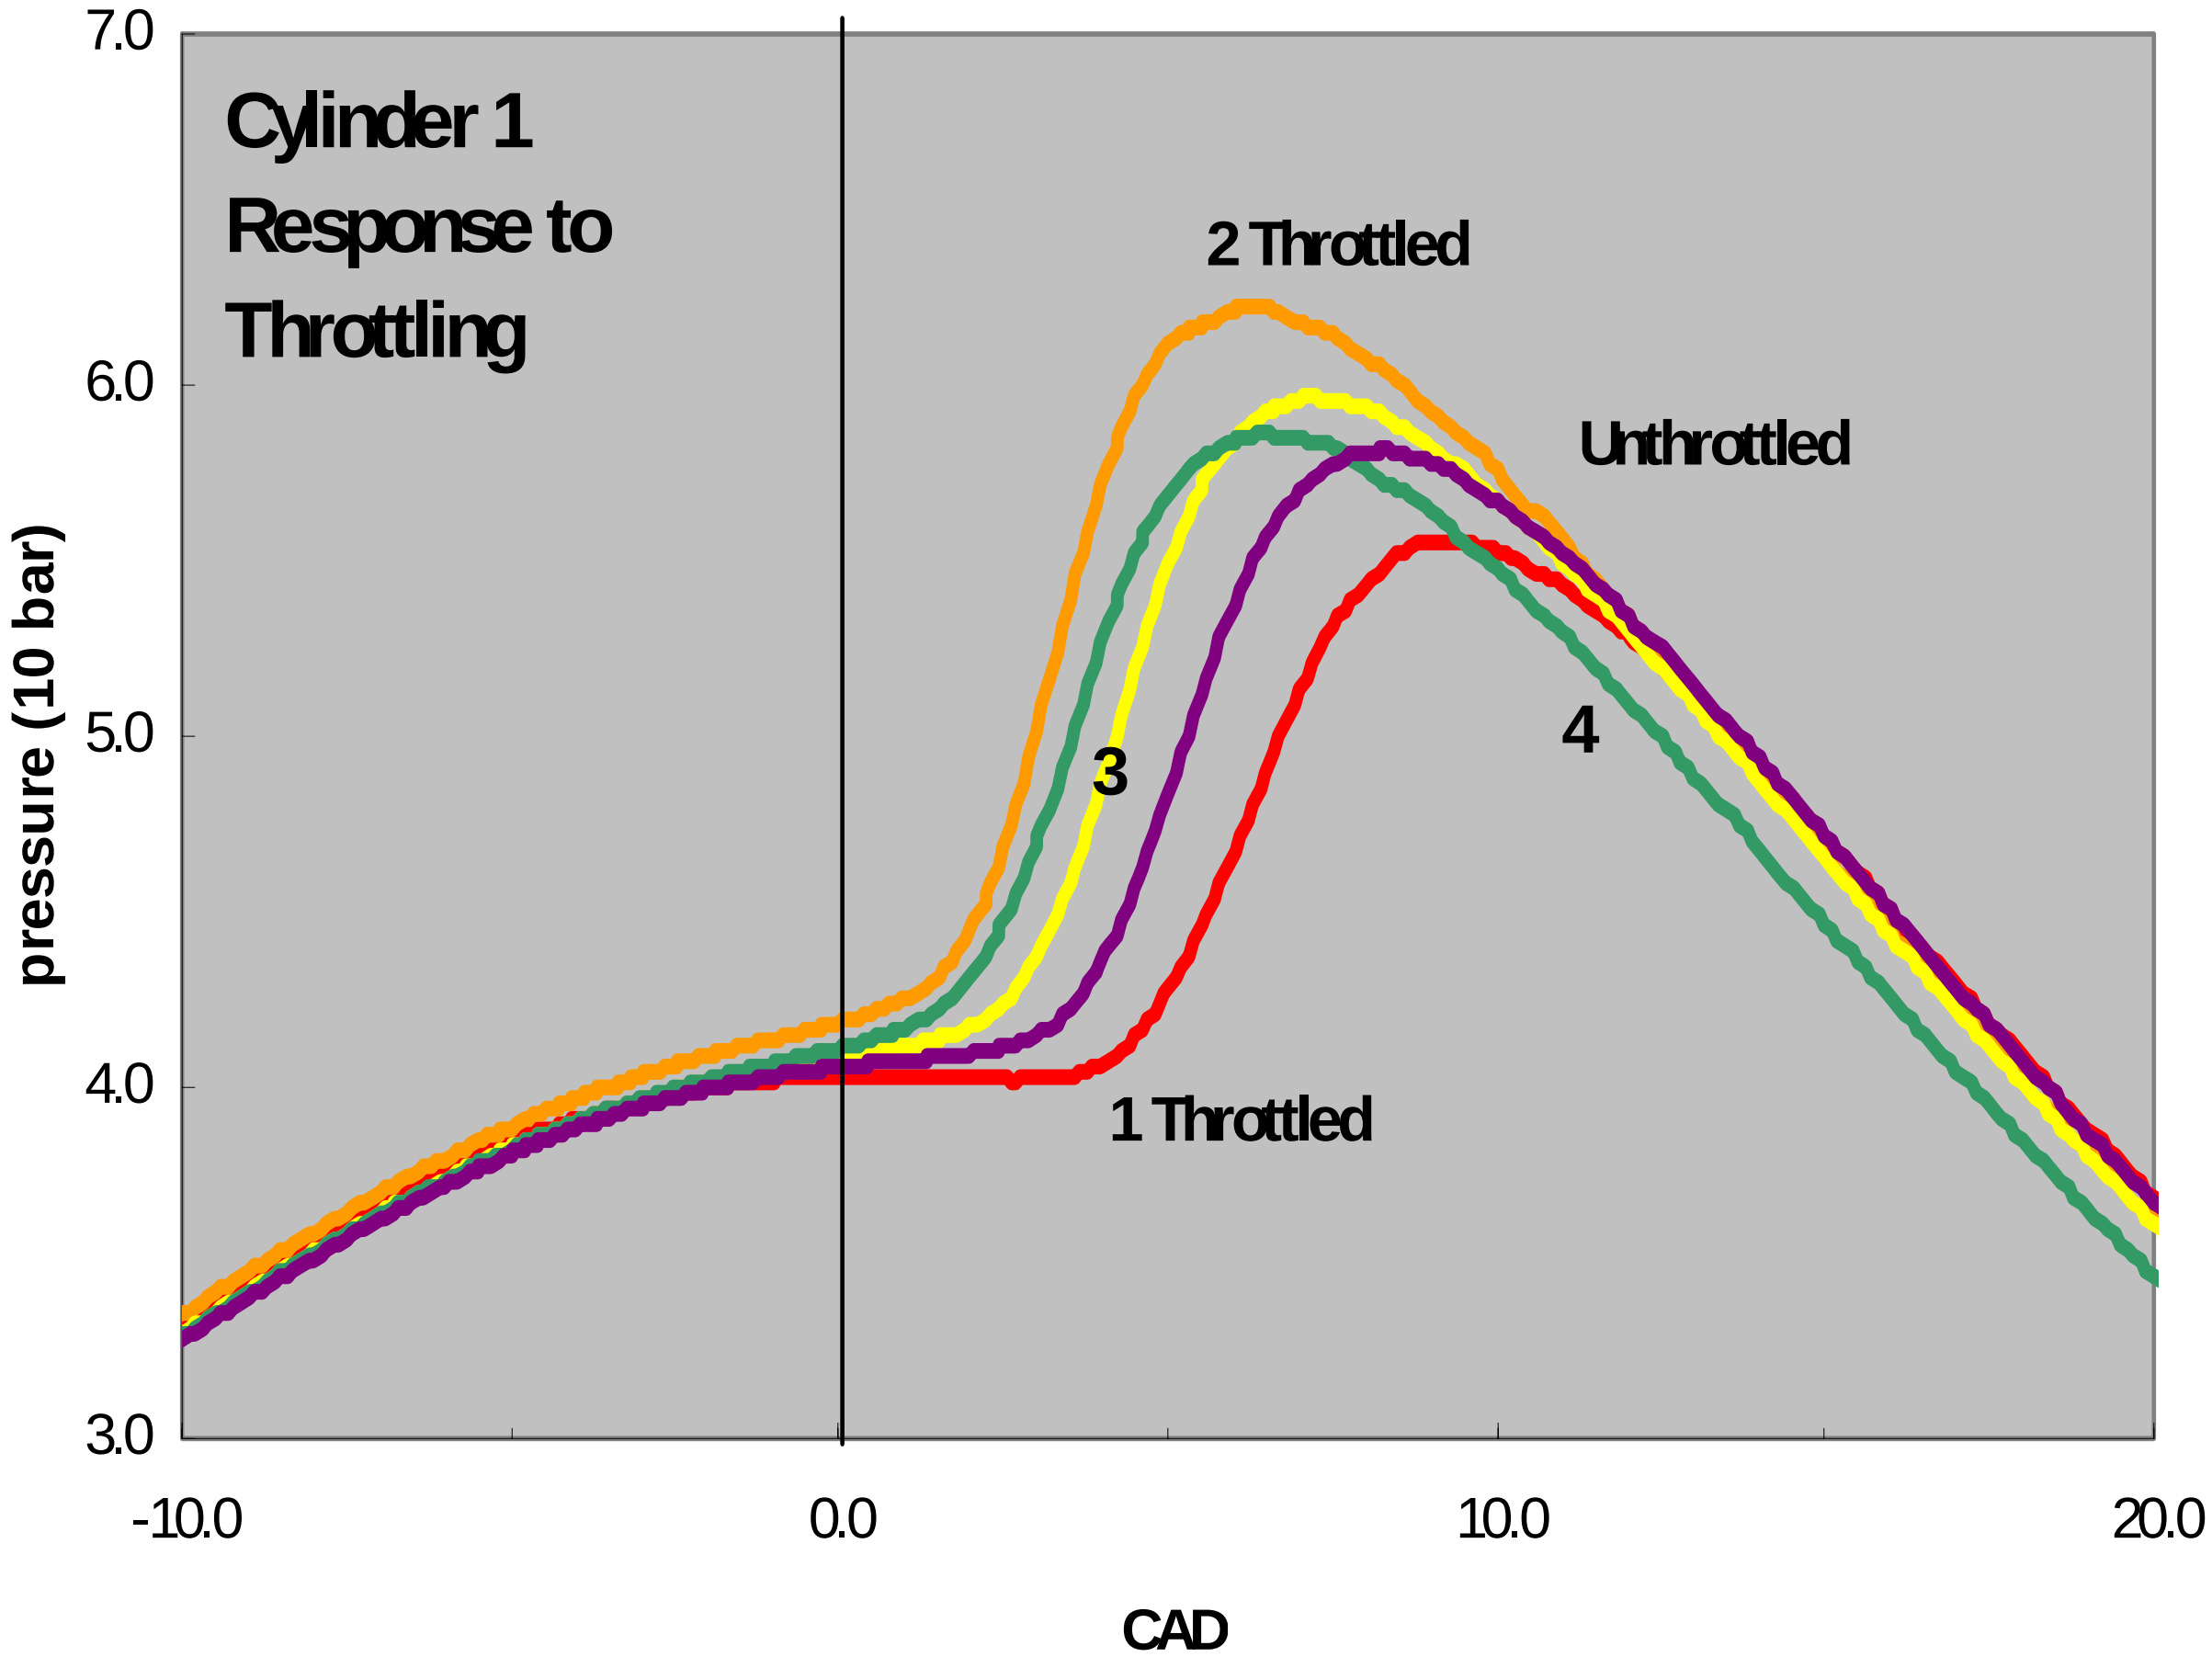

Future analysis and experimental work will focus on cylinder interactions and how to control them